



NASSLI
LED LIGHTS

LED STREET LIGHT S


Application:

Ideal for collector roads, local roads, commercial and industrial complexes, driveway, open areas, public squares, parks and playgrounds, factories, airports.

Feature:

Fixture designed for harsh and hot environments.

Each LED module can be replaced separately. Overload protection, short circuit protection, and no-load protection. Aluminum heat dissipation module has a surface anodic oxidation process to make it resistant and anti-aging fixture.

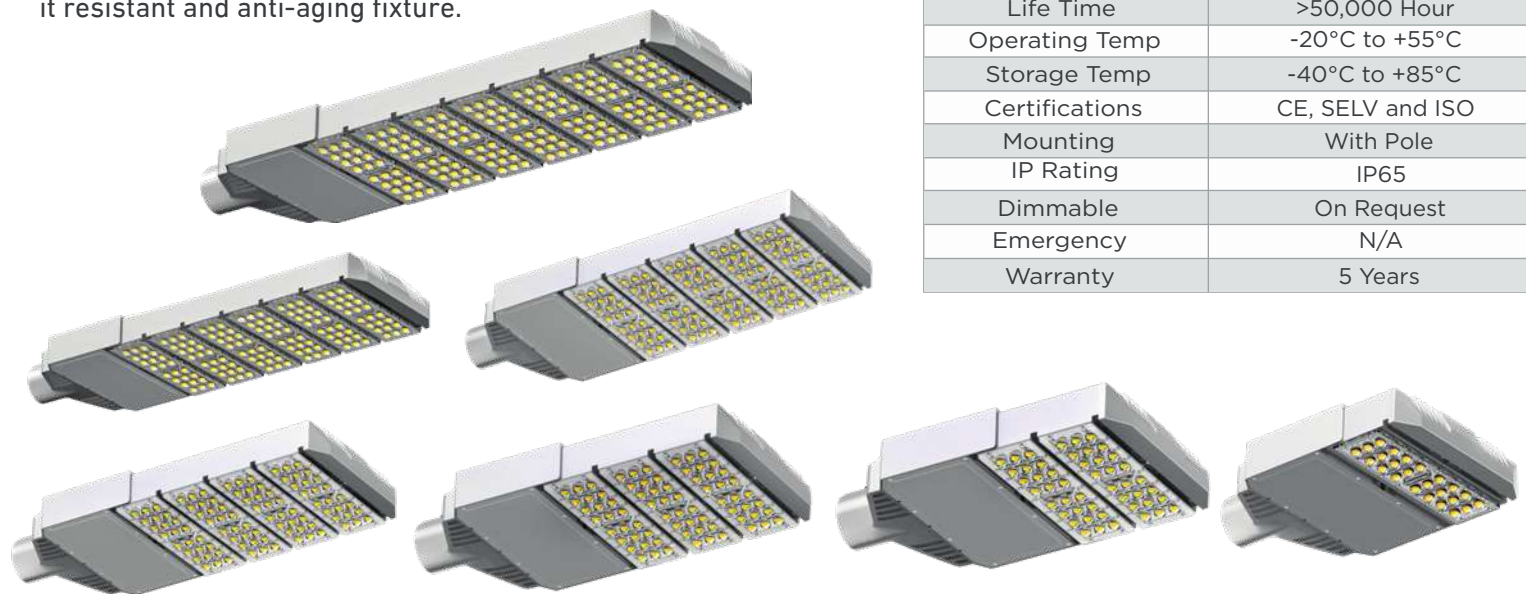

SPECIFICATIONS

ITEM	DESCRIPTION
Input Voltage	220 - 240 VAC
Frequency	50 / 60 Hz
Power Factor	>98%
CCT	2700K, 3000K, 4000K, 6000K
CRI	>80%
LED Efficiency	120 - 130Lm/W
Power supply	Tridonic / Nassli / Philips
LED Type	Osram / Philips
Materials	Aluminum, PC, & Friendly material
Beam Angle	85° x 147°
Life Time	>50,000 Hour
Operating Temp	-20°C to +55°C
Storage Temp	-40°C to +85°C
Certifications	CE, SELV and ISO
Mounting	With Pole
IP Rating	IP65
Dimmable	On Request
Emergency	N/A
Warranty	5 Years



nassli
LED LIGHTS

LED STREET LIGHT S

Order code	Dimensions(mm)	Power(Watt)	Lumen
NSL-STLS-50W-XXK-SMD-TD-XX-IP65	L395 W292 H75	50	5500
NSL-STLS-50W-XXK-SMD-PH-XX-IP65	L395 W292 H75	50	5500
NSL-STLS-100W-XXK-SMD-TD-XX-IP65	L480 W292 H76	100	11000
NSL-STLS-100W-XXK-SMD-PH-XX-IP65	L480 W292 H76	100	11000
NSL-STLS-150W-XXK-SMD-TD-XX-IP65	L575 W292 H77	150	16500
NSL-STLS-150W-XXK-SMD-PH-XX-IP65	L575 W292 H77	150	16500
NSL-STLS-200W-XXK-SMD-TD-XX-IP65	L660 W292 H78	200	22000
NSL-STLS-200W-XXK-SMD-PH-XX-IP65	L660 W292 H78	200	22000
NSL-STLS-250W-XXK-SMD-TD-XX-IP65	L755 W292 H79	250	27500
NSL-STLS-250W-XXK-SMD-PH-XX-IP65	L755 W292 H79	250	27500
NSL-STLS-300W-XXK-SMD-TD-XX-IP65	L840 W292 H71	300	33000
NSL-STLS-300W-XXK-SMD-PH-XX-IP65	L840 W292 H71	300	33000
NSL-STLS-350W-XXK-SMD-TD-XX-IP65	L935 W292 H71	350	38500
NSL-STLS-350W-XXK-SMD-PH-XX-IP65	L935 W292 H71	350	38500
NSL-STLS-400W-XXK-SMD-TD-XX-IP65	L1020 W292 H71	400	44000
NSL-STLS-400W-XXK-SMD-PH-XX-IP65	L1020 W292 H71	400	44000