



NASSLI
LED LIGHTS


LED STAIR WAY LIGHT C

Application:

It can be widely used for decoration, shopping malls, Palaces, Trade shows, Supermarkets, Conference Halls, Hotels, Schools, Hospitals, Meeting room Factories, Theater, Cinemas and Corridor etc.

Feature:

In most cases, lighting on staircases isn't purely a decorative theme it also serves a very real function in terms of safety. Glare should be avoided and maintenance considered, whilst using interior lighting to enhance the form can add beauty and softness.

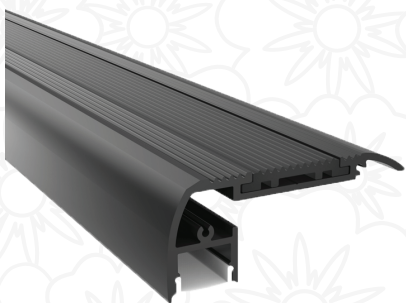


SPECIFICATIONS


ITEM	DESCRIPTION
Input Voltage	220 - 240 V A C
Frequency	50 / 60 H z
Power factor	>95%
CCT	3000K, 4000k, 5000, 6000k
CRI	>80%
LED Efficiency	85- 120Lm/W
Power supply	Tridonic / Nassli
LED Type	Osram
Materials	Aluminum, PC, & Friendly material
Beam Angle	160°
Life Time	>50,000 Hour
Operating Temp	-20°C to +55°C
Storage Temp	-40°C to +85°C
Certifications	CE, SELV and ISO
Mounting	Recessed in Wall / Surface mounting
IP Rating	IP67
Dimmable	On Request
Emergency	On Request
Warranty	5 Years

Order code	Dimensions(mm)	Power(Watt)	Lumen
NSL-STAIR-SQ-2W/MODULE-XXK-NS-IP67	W65 L27.5	10w/m	1200
NSL-STAIR-SQ-2W/MODULE-XXK-TD-XX-IP67	W65 L27.5	10w/m	1200
NSL-STAIR-SQ-2W/MODULE-XXK-PH-XX-IP67	W65 L27.5	10w/m	1200

Mounting Instruction

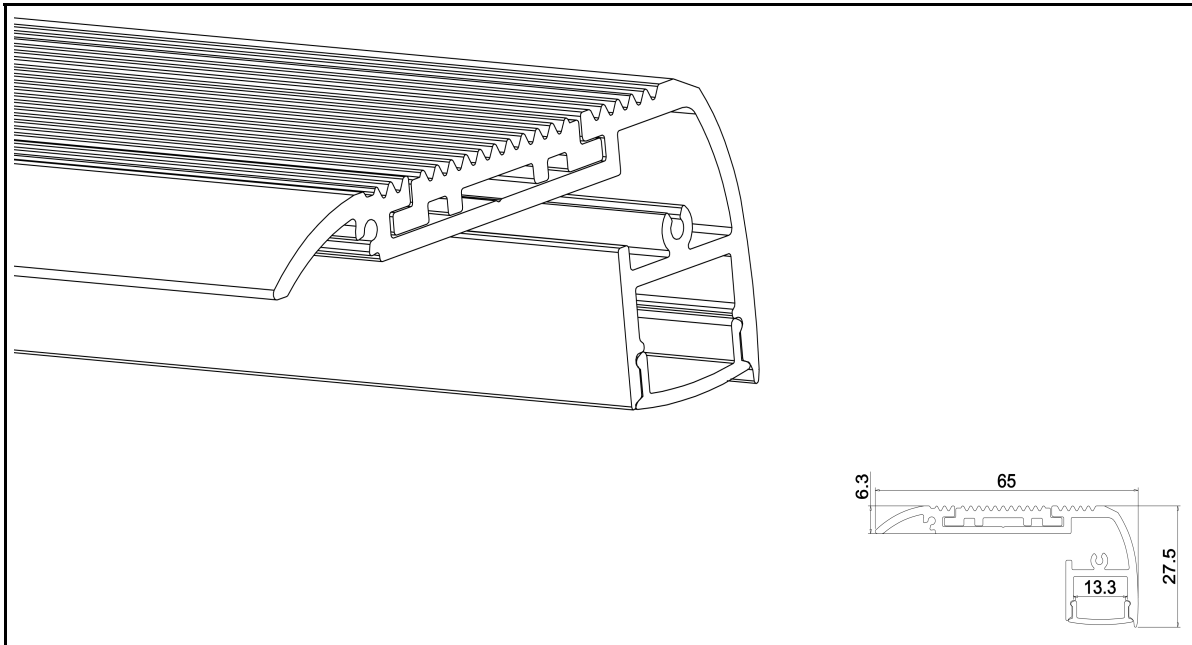

Main parts needed to mount the extrusion



Aluminum profile (A)



End cap (B)



End cap with hole (C)



Cover (D)



LED strip(E)



Blind PVC cover(F)

Tools needed for mounting:


screwdriver

NOTE! All LED strips must be connected to a 24V power supply.


IMPORTANT: The manual presents the simplest mounting procedure.

Mounting Instruction


1. Mount the profile on the steps.

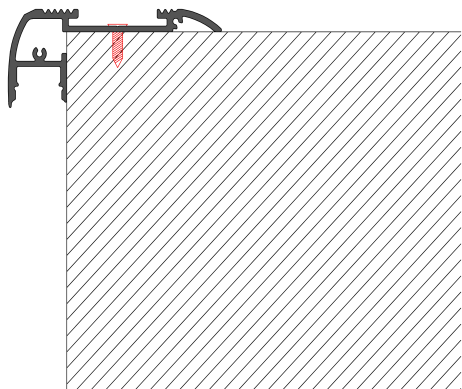

2. Insert the blind PVC cover(F).

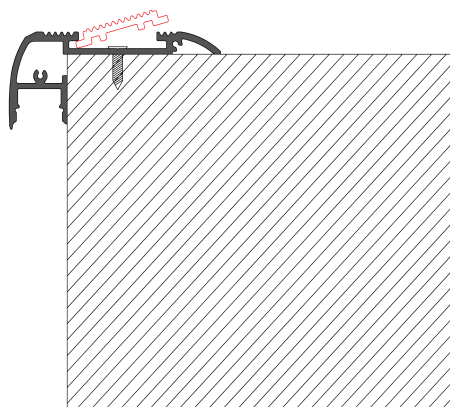

3. Mount the LED strip(E), insert the cover(D), insert the end caps(B) and (C), then lead out the

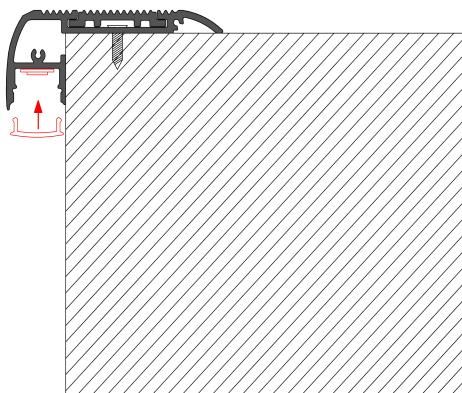

4. Run the cable to the power source, connect power.

