



NASSLI
LED LAMP

Product: 57×5×5cm LED Decoration top light
Item No.: NSL-TOPL-11W-XXK-SMD-DON-IP65

1. Feature

LED Decoration Top Light is designed outdoor use and normally to be installed in the top of the street light column. It is designed to be used in the gulf environment and resist the high temperature

Technical Data:

Input Voltage:200-240 VAC 50/60HZ




LED Type: SMD Epistar

Dimmable: no (can be dimmable on request).

Color code: Single Color (Red, Green, Blue, white, Warm White)

can be RGB and DMX addressable based on request.Wattage:

11 Watt (and can reach 22 Watt on request)

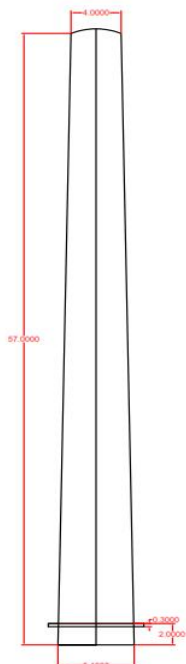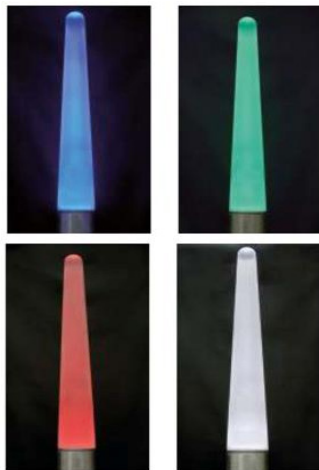

Order code	Color	LED power	Power consumption*
NSL-TOPL-11W-RED-SMD-DON-IP65	RED	11 Watt	12 Watt
NSL-TOPL-11W-GREEN-SMD-DON-IP65	GREEN	11 Watt	12 Watt
NSL-TOPL-11W-BLUE-SMD-DON-IP65	BLUE	11 Watt	12 Watt
NSL-TOPL-11W-3000K-SMD-DON-IP65	3000K	11 Watt	12 Watt
NSL-TOPL-11W-6000K-SMD-DON-IP65	6000K	11 Watt	12 Watt

SPECIFICATIONS

MAIN SPECIFICATIONS (T=25C)

ITEM	DESCRIPTION
Input Voltage	AC200-240V 50-63Hz
LED	SMD
Power	11W
LED Efficiency	95Lm/W
Initial Flux	1000Lm
Power factor	>0.95
Color	Red,Green,WarmWhite,White
Beam Angle	360°
Life Time	>50,000 Hour
Operating Temperature	-25°C to +65°C
Storage Temperature	-40°C to +80°C
Size	Outside Dimension (with aluminum base) 67*5.1cm Outside Dimension (Lighting part only 57*5cm) Hole size (in street light) 5cm
IP Rating	IP65



LED DECORATION TOP LIGHT

NASSLI
LED LAMP

Product: 57×5×5cm LED Decoration top light
Item No.: NSL-TOP-STR11-XX

1. Feature

LED Decoration Top Light is designed outdoor use and normally to be installed in the top of the street light column. It is designed to be used in the gulf environment and resist the high temperature

Technical Data:

Input Voltage:127-240 VAC 50/60HZ




LED Type: SMD 5050 Epistar

Dimmable: no (can be dimmable on request).

Color code: Single Color (Red, Green, Blue, white, Warm White)

can be RGB and DMX addressable based on request.Wattage:

11 Watt (and can reach 22 Watt on request)

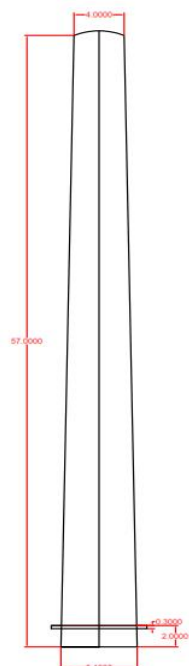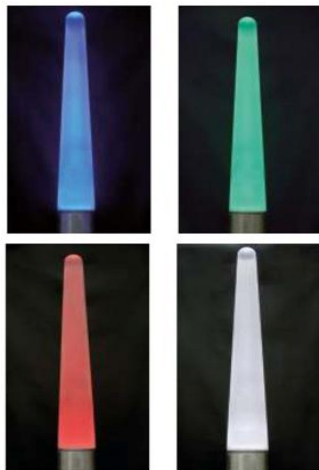

Order code	Color	LED power	Power consumption*
NSL-TOP-STR11-RD	RED	11 Watt	11 Watt
NSL-TOP-STR11-GR	GREEN	11 Watt	11 Watt
NSL-TOP-STR11-BL	BLUE	11 Watt	11 Watt
NSL-TOP-STR11-W	WHITE	11 Watt	11 Watt
NSL-TOP-STR11-WW	WARM WHITE	11 Watt	11 Watt

SPECIFICATIONS

MAIN SPECIFICATIONS (T=25C)

ITEM	DESCRIPTION
Input Voltage	127-240 VAC 50-60Hz
LED	SMD5050
Power	11W
LED Efficiency	95Lm/W
Initial Flux	1000Lm
Power factor	>0.95
Color	Red,Green,WarmWhite,White
Beam Angle	360°
Life Time	>50,000 Hour
Operating Temperature	-25°C to +65°C
Storage Temperature	-40°C to +80°C
Size	Outside Dimension (with aluminum base) 67*5.1cm Outside Dimension (Lighting part only 57*5cm) Hole size (in street light) 5cm
IP Rating	IP54

5050 SMD LED

Applications

- Signal & Symbol Indicators.
- Illuminations(illuminated advertising & general lighting).
- Amusement Machines.
- LCD Backlighting.
- Indoor & Outdoor Displays.
- Automobile Interior Lighting.

1. RED 5050 SMD LED

PART NO	Chip		Lens Color
	Material	Emitted Color	
LED-5050RVC	AlGaInP	Red ■	WATER CLEAR

Absolute Maximum Ratings (Ta = 25°C)

Items	Symbol	Absolute maximum Rating	Unit
Power Dissipation	PD	300	mW
Forward Current(DC)	IF	150	mA
Peak Forward Current *	IFP	300	mA
Reverse Voltage	VR	5	V
Operation Temperature	Topr	-40 ~ +95	°C
Storage Temperature	Tstg	-40 ~ +100	°C
Soldering Temperature	Tsol	Reflow Soldering: 240°C/10sec Hand Soldering: 350°C/3sec	

*Pulse width ≤ 0.1 msec duty $\leq 1/10$

Typical Electrical & Optical Characteristics (Ta = 25°C)

Items	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Voltage	VF	IF = 60mA	1.7		2.4	V
Reverse Current	IR	VR = 5V			10	μ A
Dominant Wavelength	WLD	IF = 60mA	620		630	nm
Luminous Intensity	IV	IF = 60mA	1200		3500	mcd
50% Power Angle	2 $\theta_{1/2}$	IF = 60mA		120		Deg

Typical Electrical/Optical Characteristics Curves (Ta=25° Unless Otherwise Noted)

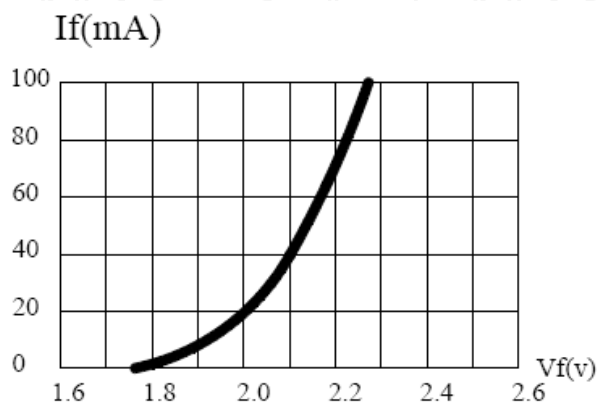


Fig. 1 Forward Current vs Forward Voltage

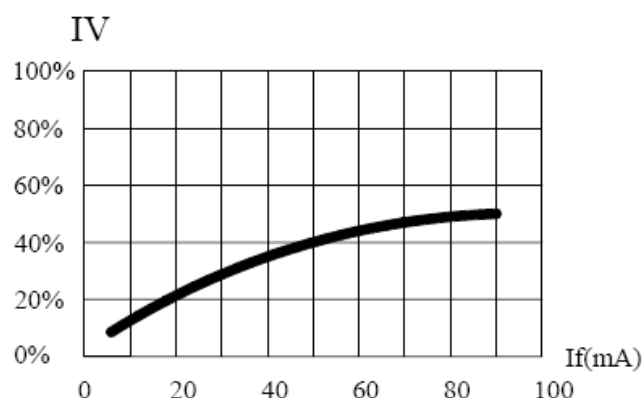


Fig. 2 Relative Luminous Flux vs Forward Current

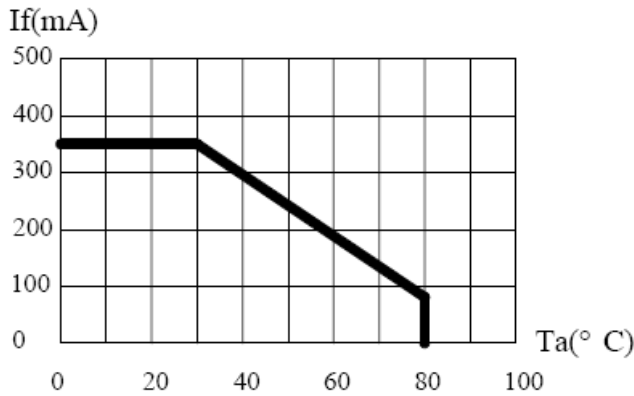


Fig. 3 Maximum Forward Current vs Ambient Temperature

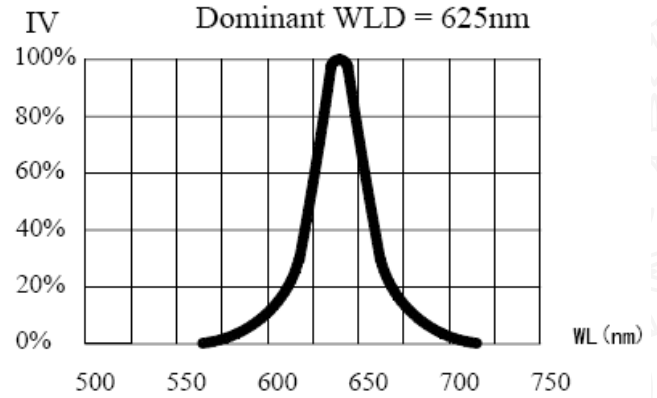


Fig. 4 Relative Luminous Flux vs Wavelength

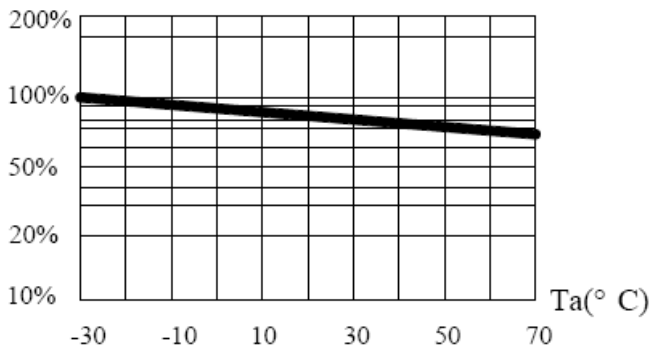


Fig. 5 Relative Luminous Flux vs Ambient Temperature

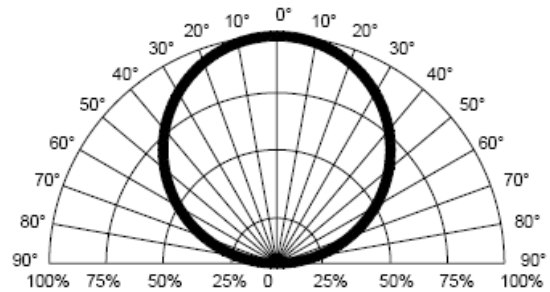


Fig. 6 Relative Luminous Flux vs Radiation Angle

2. YELLOW 5050 SMD LED

PART NO	Chip		Lens Color
	Material	Emitted Color	
LED-5050YVC	AlGaInP	Yellow ■	WATER CLEAR

Absolute Maximum Ratings (Ta = 25°C)

Items	Symbol	Absolute maximum Rating	Unit
Power Dissipation	PD	450	mW
Forward Current(DC)	IF	150	mA
Peak Forward Current *	IFP	300	mA
Reverse Voltage	VR	5	V
Operation Temperature	Topr	-40 ~ +95	°C
Storage Temperature	Tstg	-40 ~ +100	°C
Soldering Temperature	Tsol	Reflow Soldering: 240°C/10sec Hand Soldering: 350°C/3sec	

*Pulse width ≤ 0.1msec duty ≤ 1/10

Typical Electrical & Optical Characteristics (Ta = 25°C)

Items	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Voltage	VF	IF = 60mA	1.7		2.4	V
Reverse Current	IR	VR = 5V			10	μA
Dominant Wavelength	WLD	IF = 60mA	580		595	nm
Luminous Intensity	IV	IF = 60mA	1200		3500	mcd
50% Power Angle	2θ½	IF = 60mA		120		Deg

Typical Electrical/Optical Characteristics Curves (Ta=25° Unless Otherwise Noted)

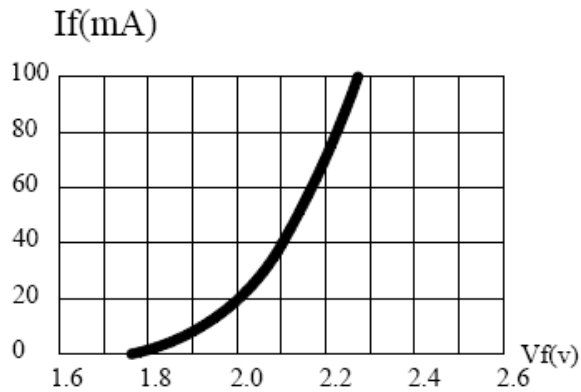


Fig. 1 Forward Current vs Forward Voltage

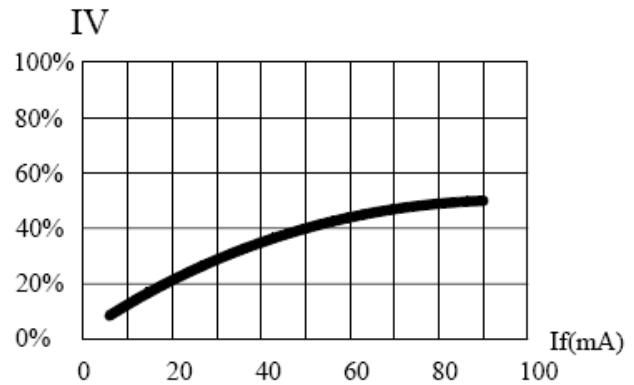


Fig. 2 Relative Luminous Flux vs Forward Current

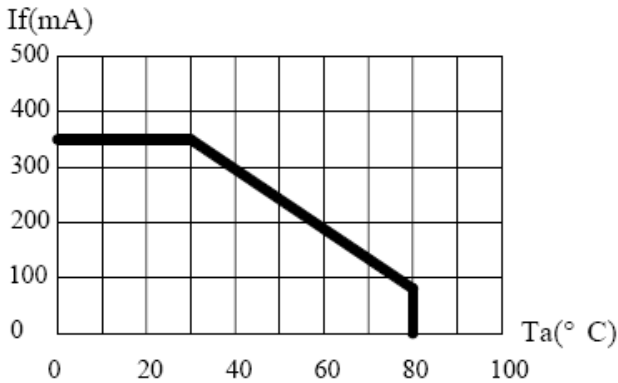


Fig. 3 Maximum Forward Current vs Ambient Temperature

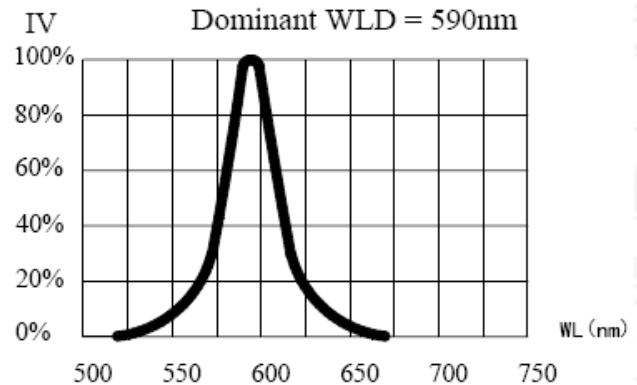


Fig. 4 Relative Luminous Flux vs Wavelength

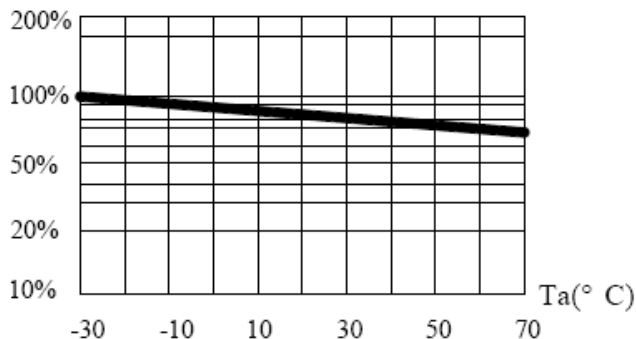


Fig. 5 Relative Luminous Flux vs Ambient

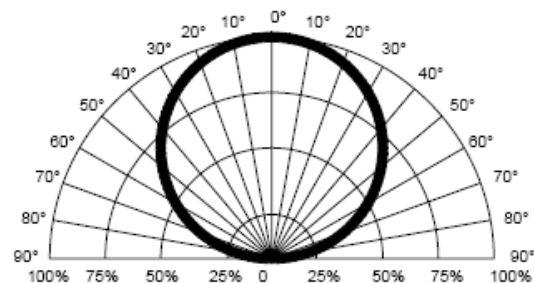


Fig. 6 Relative Luminous Flux vs Radiation Angle

3. GREEN 5050 SMD LED

PART NO	Chip		Lens Color
	Material	Emitted Color	
LED-5050GVC	InGaN	Green ■	WATER CLEAR

Absolute Maximum Ratings (Ta = 25°C)

Items	Symbol	Absolute maximum Rating	Unit
Power Dissipation	PD	450	mW
Forward Current(DC)	IF	150	mA
Peak Forward Current *	IFP	300	mA
Reverse Voltage	VR	5	V
Operation Temperature	Topr	-40 ~ +95	°C
Storage Temperature	Tstg	-40 ~ +100	°C
Soldering Temperature	Tsol	Reflow Soldering: 240°C/10sec Hand Soldering: 350°C/3sec	

*Pulse width ≤ 0.1 msec duty $\leq 1/10$

Typical Electrical & Optical Characteristics (Ta = 25°C)

Items	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Voltage	VF	IF = 60mA	2.8		3.6	V
Reverse Current	IR	VR = 5V			10	μ A
Dominant Wavelength	WLD	IF =60mA	515		535	nm
Luminous Intensity	IV	IF = 60mA	2500		5500	mcd
50% Power Angle	2 $\theta_{1/2}$	IF = 60mA		120		Deg

Typical Electrical/Optical Characteristics Curves (Ta=25° Unless Otherwise Noted)

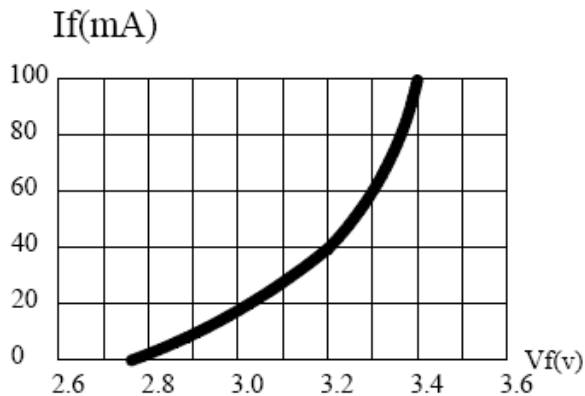


Fig. 1 Forward Current vs Forward Voltage

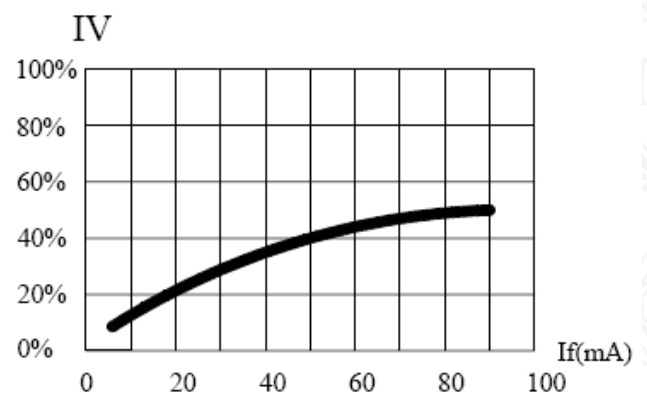


Fig. 2 Relative Luminous Flux vs Forward Current

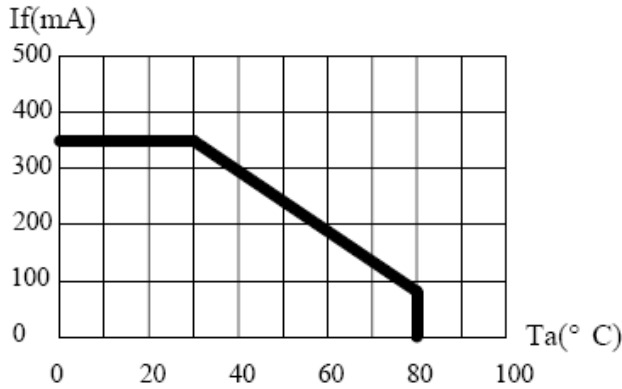


Fig. 6 Maximum Forward Current vs Ambient Temperature

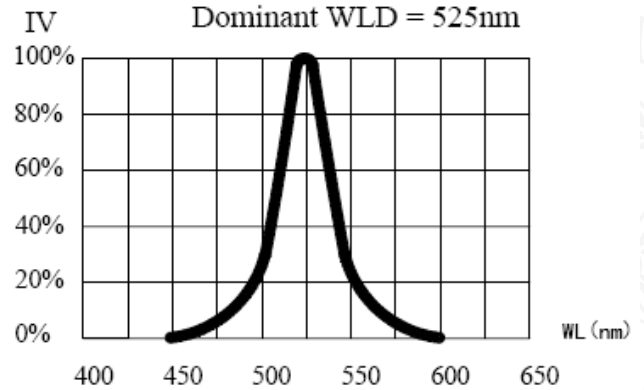


Fig. 4 Relative Luminous Flux vs Wavelength

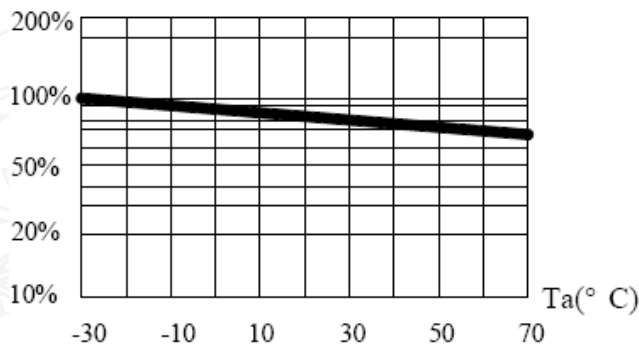


Fig. 5 Relative Luminous Flux vs Ambient Temperature

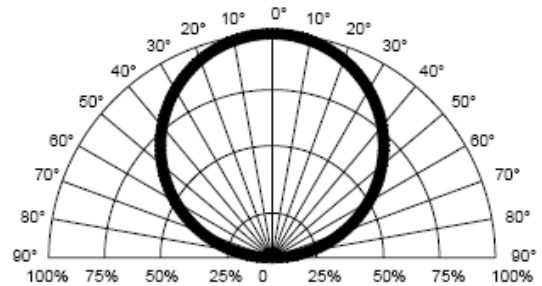


Fig. 6 Relative Luminous Flux vs Radiation Angle

4. BLUE 5050 SMD LED

PART NO	Chip		Lens Color
	Material	Emitted Color	
LED-5050BVC	InGaN	Blue ■	WATER CLEAR

Absolute Maximum Ratings (Ta = 25°C)

Items	Symbol	Absolute maximum Rating	Unit
Power Dissipation	PD	450	mW
Forward Current(DC)	IF	150	mA
Peak Forward Current *	IFP	300	mA
Reverse Voltage	VR	5	V
Operation Temperature	Topr	-40 ~ +95	°C
Storage Temperature	Tstg	-40 ~ +100	°C
Soldering Temperature	Tsol	Reflow Soldering: 240°C/10sec Hand Soldering: 350°C/3sec	

*Pulse width ≤ 0.1msec duty ≤ 1/10

Typical Electrical & Optical Characteristics (Ta = 25°C)

Items	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Voltage	VF	IF = 60mA	2.8		3.6	V
Reverse Current	IR	VR = 5V			10	μA
Dominant Wavelength	WLD	IF =60mA	460		475	nm
Luminous Intensity	IV	IF = 60mA	1000		3500	mcd
50% Power Angle	2θ½	IF = 60mA		120		Deg

Typical Electrical/Optical Characteristics Curves (Ta=25° Unless Otherwise Noted)

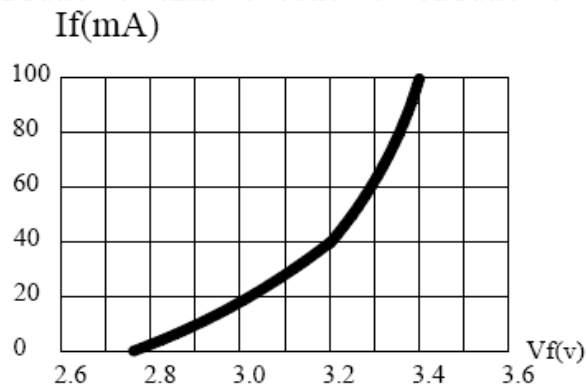


Fig. 1 Forward Current vs Forward Voltage

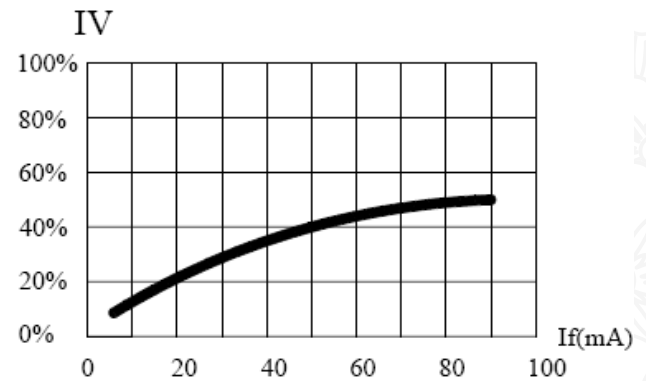


Fig. 2 Relative Luminous Flux vs Forward Current

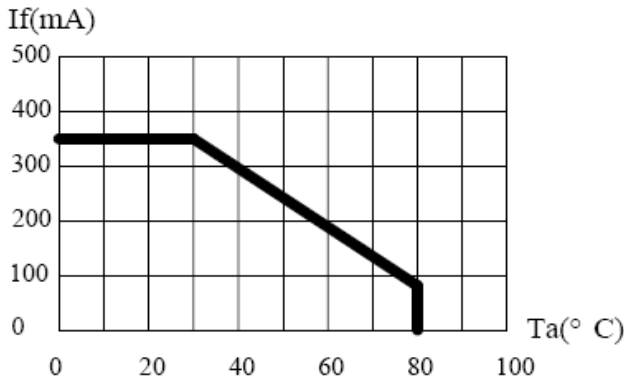


Fig. 6 Maximum Forward Current vs Ambient Temperature

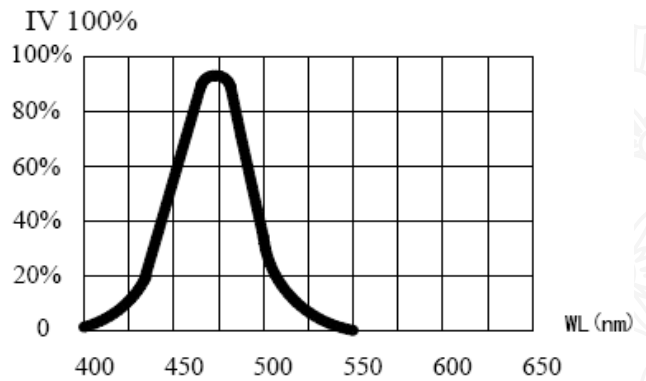


Fig. 4 Relative Luminous Flux vs Wavelength

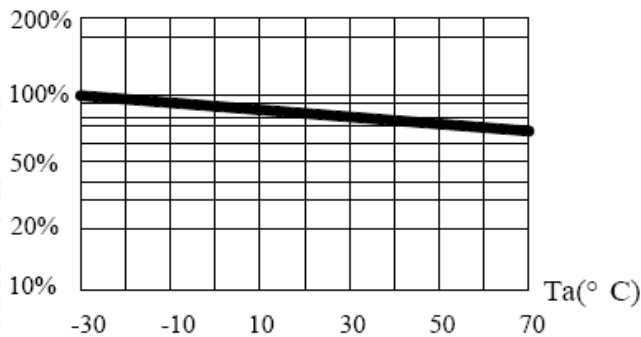


Fig. 5 Relative Luminous Flux vs Ambient Temperature

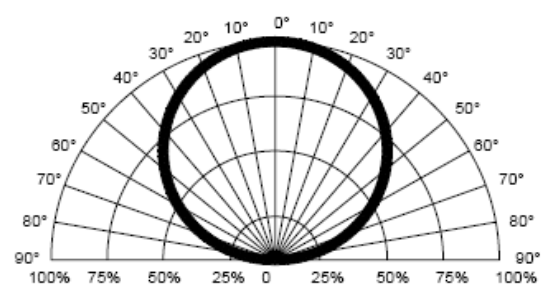


Fig. 6 Relative Luminous Flux vs Radiation Angle

5. WHITE 5050 SMD LED

PART NO	Chip		Lens Color
	Material	Emitted Color	
LED-5050WVC	InGaN	White □	WATER CLEAR

Absolute Maximum Ratings (Ta = 25°C)


Items	Symbol	Absolute maximum Rating	Unit
Power Dissipation	PD	450	mW
Forward Current(DC)	IF	150	mA
Peak Forward Current *	IFP	300	mA
Reverse Voltage	VR	5	V
Operation Temperature	Topr	-40 ~ +95	°C
Storage Temperature	Tstg	-40 ~ +100	°C
Soldering Temperature	Tsol	Reflow Soldering: 240°C/10sec Hand Soldering: 350°C/3sec	

*Pulse width ≤ 0.1 msec duty $\leq 1/10$


Typical Electrical & Optical Characteristics (Ta = 25°C)

Items	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Voltage	VF	IF = 60mA	2.8		3.6	V
Reverse Current	IR	VR = 5V			10	μA
Chromatic Coordinates	(X,Y)	IF = 60mA			(0.30,0.30)	nm
Luminous Intensity	IV	IF = 60mA	5000		6000	mcd
			14		16	LM
50% Power Angle	2θ½	IF = 60mA		120		Deg

CIE Chromaticity Chart

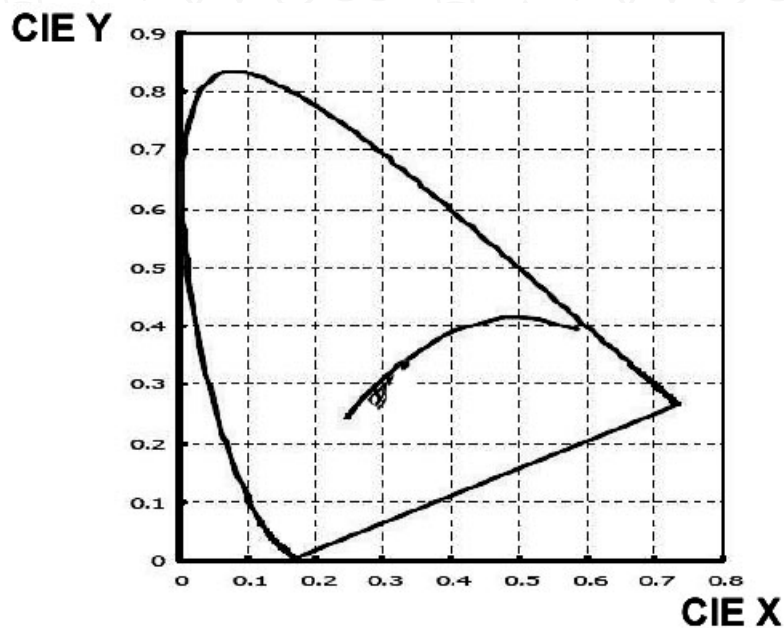

Color Coordinate

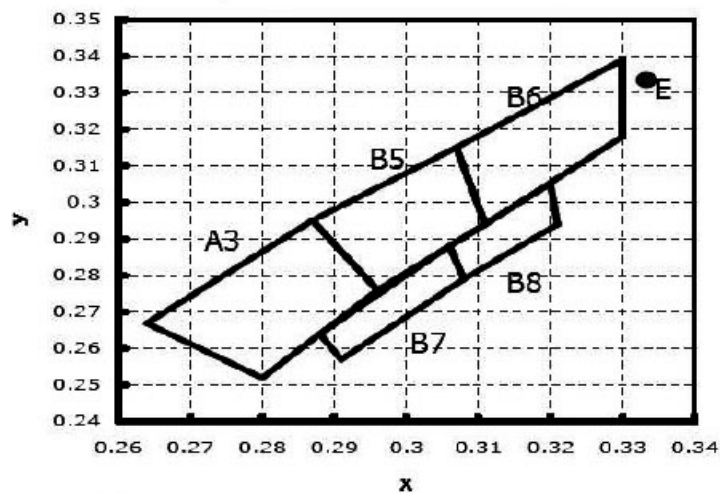

Color Ranks

Rank A3					Rank B5					Rank B7				
x	0.280	0.264	0.287	0.296	x	0.296	0.287	0.307	0.311	x	0.291	0.288	0.306	0.308
y	0.252	0.267	0.295	0.276	y	0.276	0.295	0.315	0.294	y	0.257	0.264	0.288	0.279

Rank B6					Rank B8				
x	0.311	0.307	0.330	0.330	x	0.308	0.288	0.32	0.321
y	0.294	0.315	0.339	0.318	y	0.279	0.264	0.305	0.294

* Color coordinates measurement allowance is ± 0.01

Typical Electrical/Optical Characteristics Curves (Ta=25° Unless Otherwise Noted)

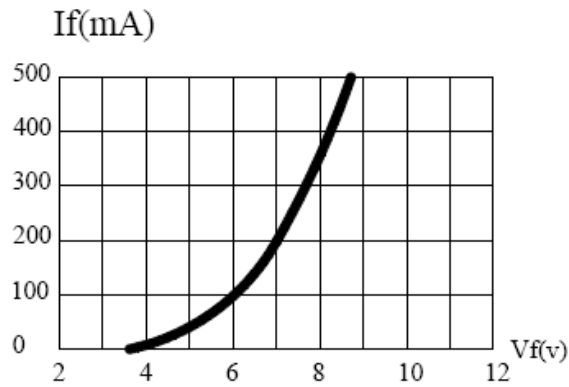


Fig. 1 Forward Current vs Forward Voltage

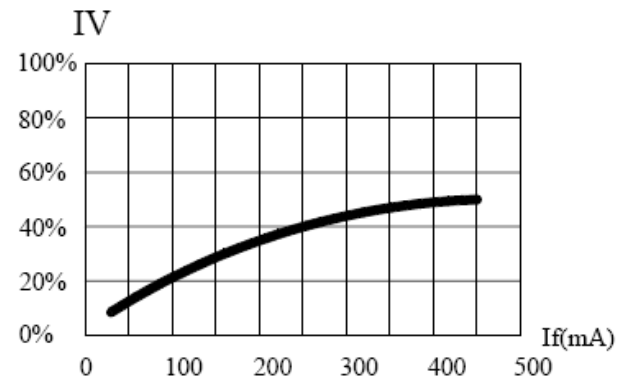


Fig. 2 Relative Luminous Flux vs Forward Current

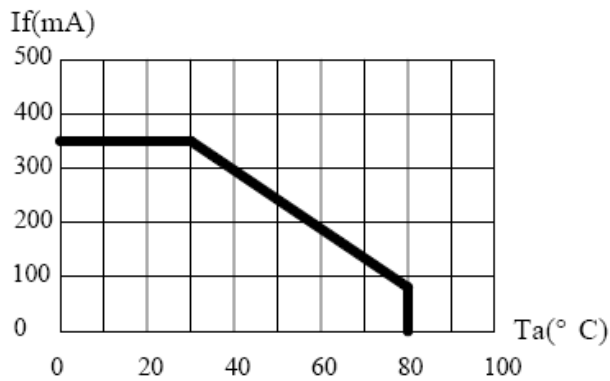


Fig. 3 Maximum Forward Current vs Ambient Temperature

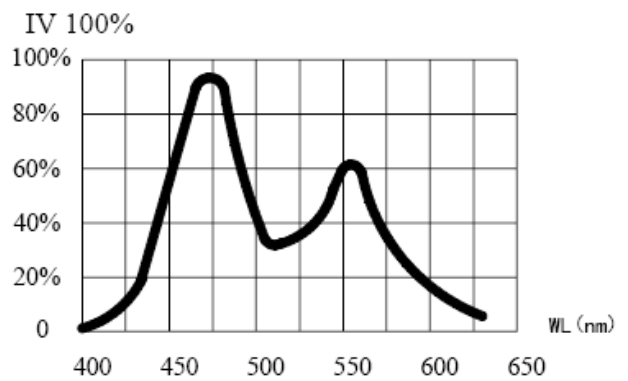


Fig. 4 Relative Luminous Flux vs Wavelength

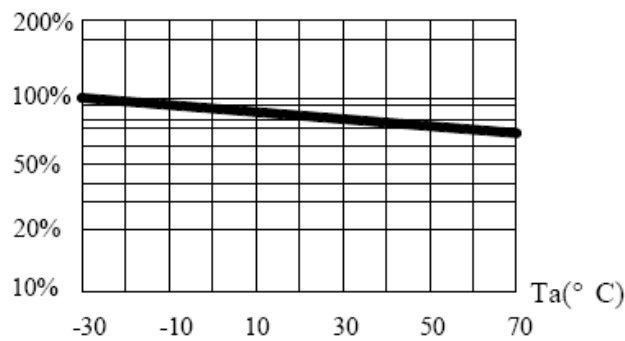


Fig. 5 Relative Luminous Flux vs Ambient Temperature






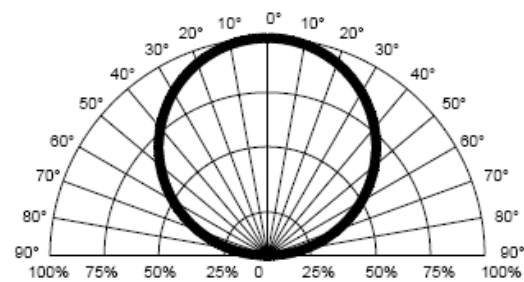


Fig. 6 Relative Luminous Flux vs Radiation Angle

Package Dimensions (unit:mm)

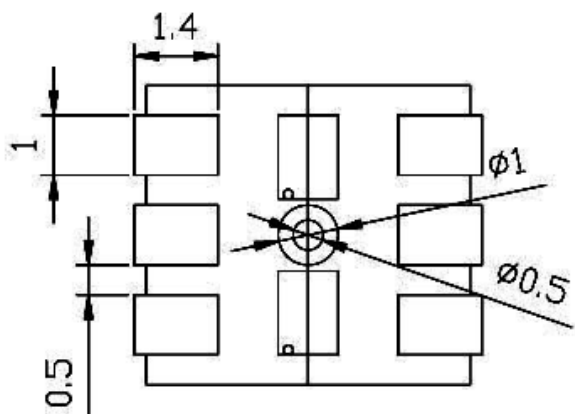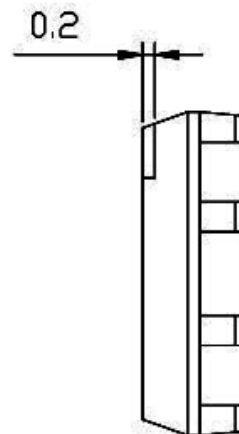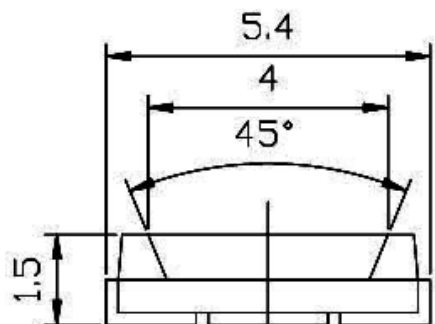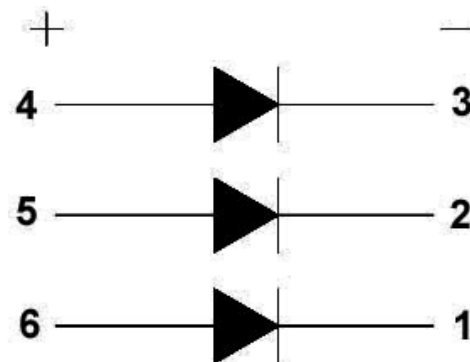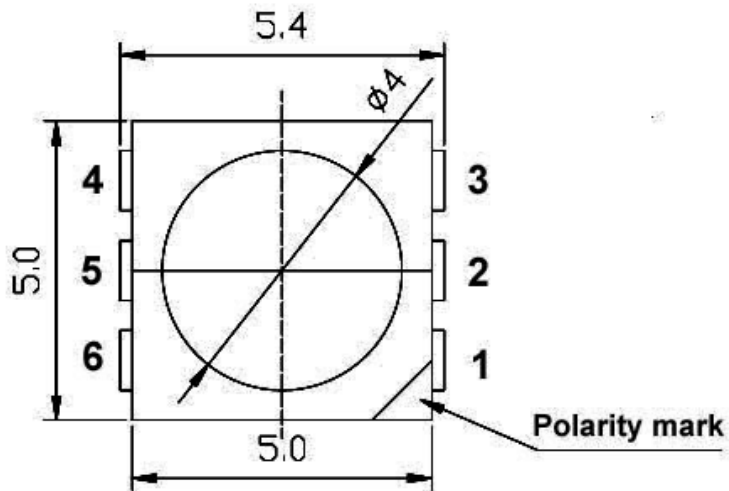

Copyright

Copyright 2009, by ShenZhen Wayjun Technology Co.,Ltd. All rights are reserved. ShenZhen Wayjun Technology Co.,Ltd reserves the right to make improvements to the products described in this manual at any time without notice.

Trademark

The names used for identification only may be registered trademarks of their respective companies.

LED Power Supply

Type: DL-12W 300-MP

Product description

- Constant current LED Driver
- Universal input voltage range
- Constant output current 300 mA

Properties

- Low power loss
- Over temperature protection
- Over load protection with automatic restart
- Short-circuit shutdown feature with automatic restart
- Protection class 2, SELV
- Type of protection IP67
- Casing: Metal, golden

Technical data

Rated supply voltage 85 – 265 V
AC voltage range 108 – 264 V
Rated current (at 230 V 60 Hz) 0.22 A
Mains frequency 50 / 60 Hz
Efficiency > 84 %
Max. input power 12 W
Output current ripple $\pm 25\%$
Output current tolerance
Max. repetitive output peak current 300 mA
Max. non-repetitive output peak current 300 mA
Turn on time (output) ≤ 0.5 s
Turn off time (output) ≤ 1 s
Hold on time at power failure (Output) 10 ms
Ambient temperature t_a -10 ... +50 °C
Ambient temperature t_a (at life-time 50,000 h) -10 ... +45 °C
Max. casing temperature t_c 75 °C
Storage temperature -30 ... +85 °C
Output voltage range : 20 – 43 VDC

