



**nassli**  
LED LIGHTS

## LED UP LIGHT

### Application:

Ideal for Villas, Palaces, hotels, shopping Malls, university, and Boulevards . Also, ideal for presenting buildings from outside. etc...

### Feature:

The product used as pure light source , using LED technology human and environment friendly, no PB, Hg nor UV.  
High power saving fixture, no decay and color temperature shift.  
Can be dimmable (through direct control or via network).



### SPECIFICATIONS

| ITEM           | DESCRIPTION                       |
|----------------|-----------------------------------|
| Input Voltage  | 220 - 240 VAC                     |
| Frequency      | 50 / 60Hz                         |
| Power factor   | >98%                              |
| CCT            | RGB                               |
| CRI            | >80%                              |
| LED Efficiency | 120-130Lm/W                       |
| Power supply   | Nassli                            |
| LED Type       | Cree                              |
| Materials      | Aluminum, PC, & Friendly material |
| Beam Angle     | 10°, 20°, 35°                     |
| Life Time      | >50,000 Hour                      |
| Operating Temp | -20°C to +55°C                    |
| Storage Temp   | -40°C to +85°C                    |
| Certifications | CE, SELV and ISO                  |
| Mounting       | Ground Recessed                   |
| IP Rating      | IP65                              |
| Dimmable       | N/A                               |
| Emergency      | N/A                               |
| Warranty       | 5 Years                           |

| Order code                        | Dimensions(mm)   | Power(Watt) | Lumen |
|-----------------------------------|------------------|-------------|-------|
| NSL-UPL-XXD-9W-RGB -SMD-DON-IP65  | W160, H110, Ø145 | 9           | 990   |
| NSL-UPL-XXD-18W-RGB -SMD-DON-IP65 | W210, H122, Ø196 | 18          | 1980  |



# LED UP LIGHT

**NASSLI**  
LED LAMP

## Method of installation

### Installation Guide

1. Make sure the housing controller is connected to ground;
2. The power and signal output wire of the last light in each loop connected waterproof cap;
3. Make sure the controller and power supply to work in ventilated, dry environment;
4. Please make sure no short-circuit before using, or the components may be burned.
5. follow the below drawing Remarks.

1. Power must be off before installing or removing;
2. Please replaced by new one when light body is damaged;

### Indoor and Outdoor use Warning

1. Please do not connect power when the lights are in package
2. Please do not connect the power supply before installation to ensure device complete connected ground
3. Please replace any cracked protective cover;
4. Please attention to fire prevention, electricity and vibration;
5. Please read the instructions carefully before installation, and keep it for future reference.


### Attention

1. Corrosive or solubility chemicals will damage of the protective shell of lights;
2. The working temperature is  $-20^{\circ}\text{C}\sim 55^{\circ}\text{C}$ , and humidity is  $0\sim 95\%$ . The lifetime will be adversely affected when beyond this scope. Storage temperature:  $-35\sim 60^{\circ}\text{C}$ ;
3. Please advise that we are not responsible for the effect when the components not from NASSLI-LED adopted.


### Common Faults and troubleshooting

1. Please check if power supply is connected, or if the switch is in the connected position when the light is not lit
2. Please check the power connection when the lights do not work well;  
If the lights still can not work well after trying the methods above, pls contact with professional maintenance staff to repair, and do not dismantle yourself

Correct Fixing Method  
30cm Gravel layer drain sytem

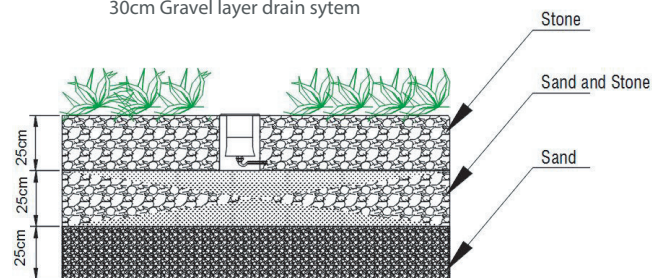

Correct Fixing Method  
Install on raised areas

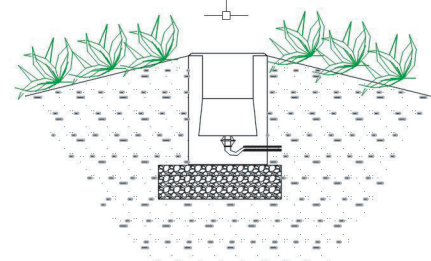

Incorrect Fixing method  
Do not install on hollow areas

