



nassli
LED LIGHTS

LED UP LIGHT

Application:

Ideal for Villas, Palaces, hotels, shopping Malls, university, and Boulevards . Also, ideal for presenting buildings from outside. etc...

Feature:

The product used as pure light source , using LED technology human and environment friendly, no PB, Hg nor UV.
High power saving fixture, no decay and color temperature shift.
Can be dimmable (through direct control or via network).

SPECIFICATIONS

ITEM	DESCRIPTION
Input Voltage	220 - 240 VAC
Frequency	50 / 60Hz
Power factor	>98%
CCT	2700K, 3000K, 4000K, 6000K
CRI	>80%
LED Efficiency	120-130Lm/W
Power supply	Nassli
LED Type	Cree
Materials	Aluminum, PC, & Friendly material
Beam Angle	10°, 20°, 35°, 60°
Life Time	>50,000 Hour
Operating Temp	-20°C to +55°C
Storage Temp	-40°C to +85°C
Certifications	CE, SELV and ISO
Mounting	Ground Recessed
IP Rating	IP67
Dimmable	N/A
Emergency	N/A
Warranty	5 Years



Order code	Dimensions(mm)	Power(Watt)	Lumen
NSL-UPL-XXD-3W-XXK-SMD-DON-IP67	W100, H105, Ø88	3	330
NSL-UPL-XXD-9W-XXK-SMD-DON-IP67	W160, H110, Ø145	9	990
NSL-UPL-XXD-18W-XXK-SMD-DON-IP67	W210, H122, Ø196	18	1980
NSL-UPL-XXD-24W-XXK-SMD-DON-IP67	W232, H140, Ø222	24	2640



LED UP LIGHT

NASSLI
LED LAMP

Method of installation

Installation Guide

1. Make sure the housing controller is connected to ground;
2. The power and signal output wire of the last light in each loop connected waterproof cap;
3. Make sure the controller and power supply to work in ventilated, dry environment;
4. Please make sure no short-circuit before using, or the components may be burned.
5. follow the below drawing Remarks.

1. Power must be off before installing or removing;
2. Please replaced by new one when light body is damaged;

Indoor and Outdoor use Warning

1. Please do not connect power when the lights are in package
2. Please do not connect the power supply before installation to ensure device complete connected ground
3. Please replace any cracked protective cover;
4. Please attention to fire prevention, electricity and vibration;
5. Please read the instructions carefully before installation, and keep it for future reference.


Attention

1. Corrosive or solubility chemicals will damage of the protective shell of lights;
2. The working temperature is $-20^{\circ}\text{C}\sim 55^{\circ}\text{C}$, and humidity is $0\sim 95\%$. The lifetime will be adversely affected when beyond this scope. Storage temperature: $-35\sim 60^{\circ}\text{C}$;
3. Please advise that we are not responsible for the effect when the components not from NASSLI-LED adopted.


Common Faults and troubleshooting

1. Please check if power supply is connected, or if the switch is in the connected position when the light is not lit
2. Please check the power connection when the lights do not work well;
If the lights still can not work well after trying the methods above, pls contact with professional maintenance staff to repair, and do not dismantle yourself

Correct Fixing Method
30cm Gravel layer drain sytem

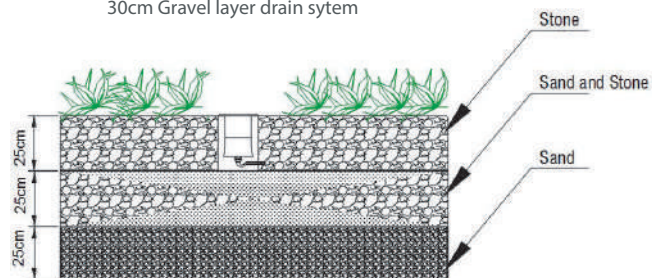

Correct Fixing Method
Install on raised areas

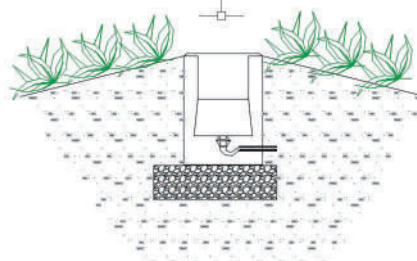

Incorrect Fixing method
Do not install on hollow areas

