



nassli
LED LIGHTS

LED WALL WASHER LIGHT

Application:

It can be widely used for decoration, shopping malls, Palaces, Trade shows, Supermarkets, Conference Halls, Hotels, Schools, Hospitals, Factories, Theater, Cinemas etc...

Feature:

Low power consumption, high brightness. Support for a variety of customization including: pixel pitch, LED color (RGB, RGBW or Single Color). An integrated double-colored mold design, P68 protection grade, UL94-V0 flame retardant grade, Class electrical safety, ensure effectively the stability of the lamp in outdoor environment for all weather conditions. Flexible mounting performance for a variety of irregular structures, easy installation and maintenance.

Cost-effective for large scale installation. (Glass curtain walls, large building Display, Decorations, 3D shapes, etc.)

SPECIFICATIONS

ITEM	DESCRIPTION
Operating Voltage	DC24V
Control	DMX
Color Resolution	16bit
CCT	RGBW
CRI	>80%
Pixel Pitch	Customize
Power supply	Nassli
LED Type	Cree/Epistar 24/36 SMD
Housing	Aluminum,
Color Fram	Silver/Black
Beam Angle	45°,60°,10°45°,10°60°
Life Time	>80,000 Hour
Operating Temp	-35°C to +60°C
Storage Temp	-40°C to +70°C
Optical Lens	Temperad Glass
Mounting	Wall Mounted / Surafce Mounted
IP Rating	IP66
Dimmable	On Request
Emergency	On Request
Warranty	5 Years

Order code	Dimensions(mm)	Power(Watt)	Lumen
NSL-WW-100-18W-RGBW-SMD-DMX-IP66	45*1000	18	RGBW




nassli
LED LIGHTS

LED WALL WASHER LIGHT



Product Structure Drawing (mm)

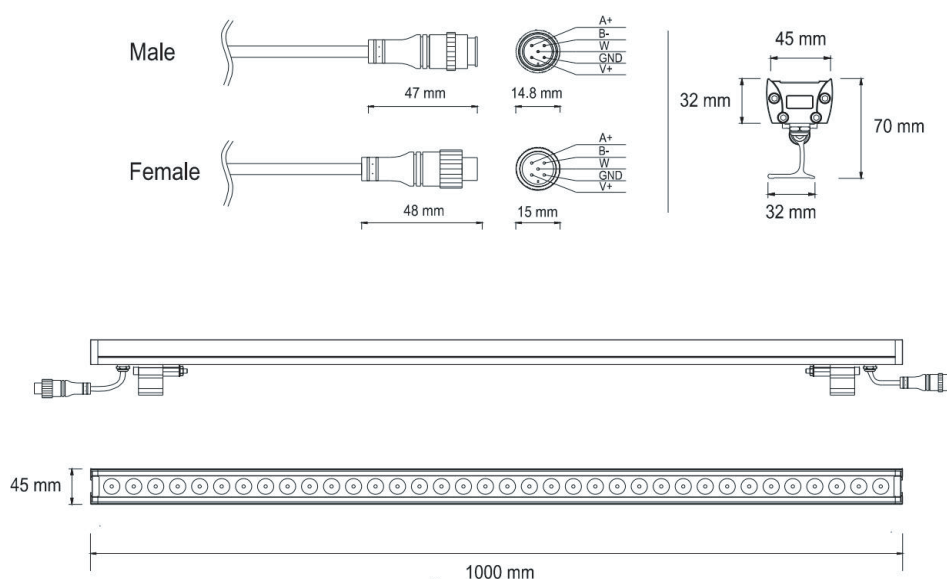





nassli
LED LIGHTS

LED WALL WASHER LIGHT

Installation Diagram

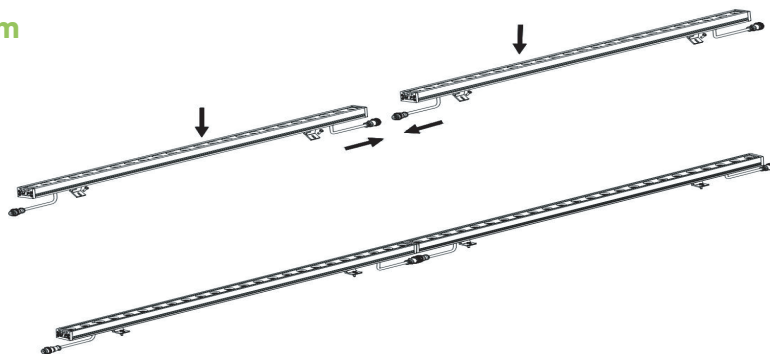

Control System Diagram

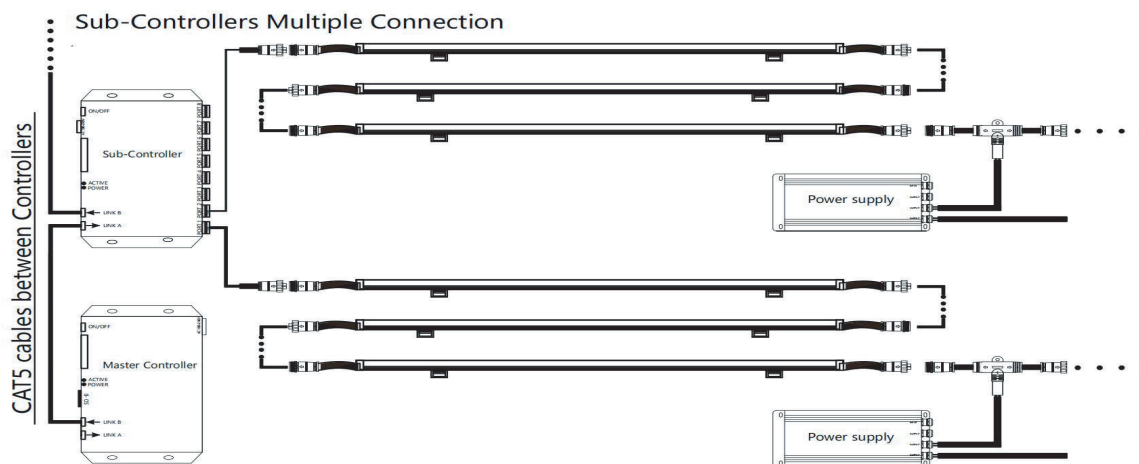

Mona

Mona max power 36W/M, with 5 Pin Cable: Red V+ / Green A / Blue B / Yellow W / Black GND. One controller with 8 DMX outputs, each takes max 25 meters RGB fixtures. Power input at the middle of strings is recommended.