ARGUS NEO: Trust-Gated Counterfactual Dual Control for Adaptive Acoustic Structural Interrogation

Ripan
Independent Researcher
India

***Abstract*—ARGUS NEO is an inspectable research prototype for sequential acoustic interrogation of a panel with one dominant scatterer. It maintains a spatial posterior and separate metrology uncertainty, including correlated velocity and timing estimates; generates source–receiver–waveform candidates; and supports diagnostic, direct-reference calibration, verification, and abstention actions. The default controller uses explicitly labelled heuristic utilities. A new optional controller instead compares calibration and diagnosis using expected squared localization error plus acquisition cost in square metres, with Gaussian observation branches over at most two measurements. Quality and out-of-distribution checks precede structural posterior fusion. Evidence exports support integrity verification against an independently retained checkpoint, not measurement authentication. In a source-fingerprinted synthetic check of six paired seeds per condition and six measurements per case, nominal mean errors were 43.90 mm for the legacy controller and 12.58 mm for the optional controller; under velocity, attenuation, and noise mismatch they were 150.22 and 203.78 mm. Both paired bootstrap advantage intervals included zero. The optional controller remains off by default. Historical benchmarks are separated from these current results. The implementation does not establish physical accuracy, general joint inference, commercial superiority, or legal patentability.**

***Index Terms*—active sensing, Bayesian experimental design, dual control, structural health monitoring, nondestructive evaluation, uncertainty quantification, digital twin, out-of-distribution detection, adaptive measurement, guided waves**

I. Introduction

Nondestructive evaluation (NDE) is usually presented as a mapping from a measurement to a decision: acquire a waveform, compute features, and classify or localize damage. That formulation leaves the measurement geometry fixed. Yet the source position, receiver position, waveform, frequency band, amplitude, and duration determine which aspects of an internal structure are observable. When measurements have different costs, choosing the next experiment can be as important as interpreting the previous one.

ARGUS addresses the sequential question

$$e_{t+1}^{\star} = \arg\max_{e \in \mathcal{E}_t} \left[\mathcal{I}_t(e) - \mathcal{C}_t(e) \right], \tag{1}$$

where e is a physically executable experiment and $\mathcal{E}_t$ is a state-dependent candidate set. After observing response y_{t+1}, ARGUS performs a recursive Bayesian update, regenerates candidates from the new posterior, and repeats. This is related to Bayesian experimental design and active data selection [1], [2], but instantiated as a live, spatial, source–receiver interrogation loop.

TABLE I
Passive Detection Versus ARGUS Active Interrogation

Property	Passive pipeline	ARGUS prototype
Measurement	Fixed plan	Chosen from current belief
State	Label or point	Normalized spatial posterior
Uncertainty	Often implicit	Entropy, covariance, local mass
History	Optional aggregation	Recursive Bayesian fusion
Output	Detect or locate	Map, next action, reason, stop state
Efficiency	Scan or fixed network	Information–cost tradeoff

The prototype targets an opaque rectangular panel with one dominant hidden anomaly (cavity, loose region, delamination, or dense inclusion). Its central distinction from a one-shot classifier is summarized in Table I. It is designed to run without hardware through a seeded physics-inspired simulator, while the same session engine accepts a microphone, validated WAV upload, or serial-connected probe.

The contributions of this implementation are:

1) an observe–infer–plan–act loop joining simulation or acquisition to block-structured spatial and metrology estimates, retaining velocity–timing covariance rather than claiming a general joint posterior;
2) a dual-control policy that switches among diagnostic, calibration, verification, and abstention actions and evaluates counterfactual observation distributions using risk, worst-rival separation, information, movement, energy, redundancy, trust, and safety terms;
3) selection among waveform families and source–receiver geometries, with two live analytical/physics-signature fidelity levels; the legacy route lookahead is a geometric proxy, while the optional risk controller branches on observations;
4) likelihood tempering, online model-discrepancy correction, OOD indicators, calibration diagnostics, and explicit verify/abstain states, without claiming field-calibrated probabilities;

5) an auditable research stack comprising resumable jobs, paired benchmarks, ablations, fault injection, truth-sealed replay, hash-chained evidence export, phone-camera guidance, and a reconnecting edge node;
6) tested endpoints, numerical and safety regression tests, and a production frontend build; the dated audit report records the current verification evidence.

A. Revision Scope: 20 September 2026

The following architectural equations describe modelling intent unless explicitly identified as executed. The runtime is block-structured, not a fully coupled structural–metrology posterior. Learned-surrogate and imported-response-bank fidelity levels are not validated live-controller implementations. Multimodal sensing, robotics, multi-defect localization, and reliable defect type, depth, or severity inference are outside the demonstrated scope. The terms "dual control" and "Bayes risk" in the legacy formulation denote engineered proxies; the distinct, optional physical-loss controller below is the implemented finite-horizon Bayesian design approximation. Healthy/damage/unknown scores and trust values are also heuristic, not certified probabilities.

A direct-path observation satisfies $y = d/v + b + \epsilon$, with propagation state $\theta = (v, b)$ and covariance C. Its Jacobian is $h = (-d/v^2, 1)$. The Gaussian covariance update is implemented in Joseph form,

$$C^+ = (I - Kh)C(I - Kh)^T + KRK^T, \tag{2}$$

$$K = Ch^T(hCh^T + R)^{-1}. \tag{3}$$

A single delay supplies rank-one information; different reference path lengths are necessary to separate velocity from timing. Absolute pose requires independently measured pose errors and uncertainty. Waveform quality alone is not treated as separate evidence for both transmitter and receiver coupling.

For spatial regions with probabilities p_j, centres x_j in metres and unresolved within-region variances s_j^2, the optional controller uses

$$r(p) = \sum_j p_j(\|x_j\|^2 + s_j^2) - \left\| \sum_j p_j x_j \right\|^2. \tag{4}$$

All posterior mass contributes. Calibration and diagnosis share this loss and a declared cost conversion. Within a finite beam of candidate actions, the two-step objective is

$$\begin{aligned} Q(a) = c(a) + \mathbb{E}_{y|a} \min \big\{ & r(p_y), \\ & \min_b [c(b \mid a) + \mathbb{E}_{z|y,a,b} r(p_{y,z})] \big\}. \end{aligned} \tag{5}$$

Conditioning the second observation includes the shared velocity–timing cross-covariance. The second-step options are diagnostics or stopping; this is not unrestricted multi-step optimal control. Independent measurement and pose noise, linearized propagation, region coarsening, and conditional within-region position independence remain assumptions. Gauss–Hermite orders 16 and 32 provide a reported numerical sensitivity diagnostic, not a rigorous integration error bound. Planning's arrival model and inference's generalized matched-filter likelihood remain different approximations.

OOD assessment now precedes fusion. Rejected or stale verification labels cannot satisfy the stopping gate. A successful direct reference validates neither the scattered-wave model nor field coverage, and fitted calibration residuals no longer populate the structural conformal reference pool. Integrity verification checks stored acquisition content; a separately retained ledger head and count are needed to detect whole-history replacement. Checksums alone do not establish acquisition authenticity.

The novelty claim is deliberately narrow. Guided-wave NDE, Bayesian localization, Bayesian sensor placement, active learning, dual control, matched filtering, and active digital-twin calibration all predate this work [3]–[7]. The research contribution proposed for examination is the executable coupling of live rival-mode discrimination, structural–metrology action arbitration, constrained source–receiver–waveform co-design, trust-tempered physical evidence, and verifiable decision history. Legal patentability is not established by this manuscript and requires a professional claim-specific prior-art search.

II. Related Work and Design Position

A. Guided-Wave and Vibration-Based Inspection

Elastic waves can interrogate plate-like structures over areas larger than a probe footprint, while damage modifies propagation through scattering, attenuation, mode conversion, and local resonance [3]. Practical guided-wave interpretation is complicated by dispersion, anisotropy, boundaries, coupling variability, and environmental drift. Open Guided Waves provides controlled CFRP measurements for comparative algorithm research [8], illustrating both the value and the complexity of measured wavefields.

ARGUS does not claim that its compact simulator is a high-fidelity Lamb-wave or finite-element model. It uses path length, propagation delay, attenuation, signed defect reflection, frequency-sensitive gain, and damped ringing to create an interpretable inverse problem that can exercise the complete adaptive loop. The real-device path is intentionally decoupled from this simulator.

B. Bayesian Design and Active Measurement

Bayesian experimental design selects an experiment according to expected utility under current uncertainty [1]; information-based active selection chooses data expected to be informative about hypotheses or predictions [2]. In structural health monitoring, Flynn and Todd formulated optimal actuator/sensor placement using Bayes risk and demonstrated active guided-wave examples [4]. Much of that literature optimizes a fixed network or configuration. ARGUS instead replans a single next, executable experiment after every observation and incorporates movement, excitation, and redundancy costs.

Exact expected information gain would marginalize over all possible future observations for every candidate. That calculation is expensive and only as reliable as the generative

model. ARGUS therefore uses a bounded counterfactual-disagreement proxy. Throughout this paper, "expected information gain" means this implemented proxy, not an exact mutual-information calculation or a guarantee of global optimality.

C. Open Experimental Evidence

The LMSD 2021 dataset contains measured frequency-response functions (FRFs) from a $600 \times 600 \times 4$ mm cross-ply CFRP plate, a 12×12 coordinate grid, seven accelerometer/hammer nodes, a healthy baseline, and six added-mass scenarios [9]. It supplies real multistatic responses and known mass locations, but not cavities, delaminations, or adaptively selected trials. ARGUS uses it to test data ingestion and feature transfer, not to imply physical validation of every supported defect type.

D. Crowded Prior Art and Commercial Position

The field is crowded at both the apparatus and inference levels. Embedded Lamb-wave arrays, phased focusing, baseline comparison, multi-path prediction, Bayesian damage localization, and Bayesian actuator/sensor placement are established [4], [5], [10]–[12]. Autonomous metrology programs also combine physics-informed learning, active experiment design, and adaptive calibration [13]; EP 4 592 907 A1 describes recursive Bayesian digital-twin calibration and active instrument-setting adjustments [7]. Accordingly, neither "AI with ultrasound," "Bayesian guided waves," "choose another measurement," nor "self-calibration" is asserted as novel.

Table II compares public product descriptions, not confidential implementations. A blank or negative distinction means only that the reviewed public material does not establish that feature. Commercial systems have field maturity, hardware qualification, trained operators, and application evidence that ARGUS presently lacks.

III. Problem Formulation

Let the panel occupy normalized coordinates $\Omega = [0,1]^2$. Physical distance is evaluated after the transformation

$$\boldsymbol{p}_{\mathrm{m}} = \mathrm{diag}(W, H)\boldsymbol{p}, \tag{6}$$

where the default width and height are $W = 0.60$ m and $H = 0.40$ m. The latent defect state is

$$z = (x, y, r_x, r_y, q, T), \tag{7}$$

containing center, elliptical radii, severity $q \in [0,1]$, and type T. The current prototype explicitly infers only location (x, y) on an $G \times G$ grid; size, severity, and type are nuisance variables captured by simulator randomization and likelihood robustness.

An experiment is

$$e = (\boldsymbol{s}, \boldsymbol{r}, f_0, f_1, a, d, w), \tag{8}$$

where $\boldsymbol{s}$ and $\boldsymbol{r}$ are normalized source and receiver coordinates, f_0, f_1 are band endpoints, a is normalized amplitude, d is duration, and $w \in \{\text{impulse,sine,chirp}\}$. Given observation history $\mathcal{D}_t = \{(e_i, y_i)\}_{i=1}^{t}$, the belief grid is

$$P_t(j) = P(z_{xy} = j \mid \mathcal{D}_t), \qquad \sum_{j=1}^{G^2} P_t(j) = 1. \tag{9}$$

The initial belief is uniform. Each observation supplies a likelihood $L_{t+1}(j)$ and

$$P_{t+1}(j) = \frac{P_t(j)\max[L_{t+1}(j), \varepsilon]}{\sum_k P_t(k)\max[L_{t+1}(k), \varepsilon]}, \quad \varepsilon = 10^{-12}. \tag{10}$$

The normalized uncertainty is

$$\bar{H}(P) = -\frac{\sum_j P(j)\log_2(P(j)+\varepsilon)}{\log_2(G^2)} \in [0,1]. \tag{11}$$

IV. System Architecture

Figure 1 shows the implemented data flow. Ground truth exists only inside simulation sessions and remains server-side until an explicit reveal action. Both simulated and physical signals pass through the same analysis, persistence, and user-interface contracts.

The Python backend contains domain models, simulation, signal analysis, belief inference, planning, evaluation, device adapters, session orchestration, and SQLite persistence. A FastAPI layer exposes session, recommendation, experiment, upload, posterior, history, reveal, device, and benchmark endpoints. The TypeScript/React frontend visualizes the posterior heatmap, recommended geometry, signal, spectrum, power spectral density, spectrogram, belief history, benchmark curves, and camera overlay. A single launcher starts both processes locally.

V. Physics-Inspired Forward Model

A. Excitation

For $N = \lfloor df_s \rceil$ samples at default sample rate $f_s = 16$ kHz, the excitation occupies the first

$$N_b = \lfloor f_s \min(10\,\mathrm{ms}, 0.22d) \rceil \tag{12}$$

samples. A Tukey window with shape parameter 0.45 suppresses burst discontinuities [19]. A sine uses $\sin(2\pi f_0 t)$; a chirp sweeps linearly from f_0 to f_1; and the impulse option uses a Ricker-like pulse

$$u(t) = a[1 - 2\phi(t)^2]\exp[-\phi(t)^2], \tag{13}$$

$$\phi(t) = \frac{\pi(t - 0.28d_b)}{\max(f_c^{-1}, 0.22\,\mathrm{ms})}. \tag{14}$$

B. Direct and Scattered Responses

Let d_{sr} denote physical source–receiver distance and let d_{sz}, d_{zr} denote the two legs through the defect. The response is

$$y(t) = A_0 u(t-\tau_0) + A_z u(t-\tau_z) + r_z(t) + n(t) + b(t), \tag{15}$$

TABLE II
PUBLICLY DESCRIBED MARKET POSITION VERSUS THE ARGUS RESEARCH WEDGE

Platform	Acquisition pattern	Publicly described strength	TG-CDI distinction from reviewed material	ARGUS disadvantage
Gecko Cantilever [14]	Dense robotic ultrasonic/camera acquisition	Large-scale high-fidelity asset data, digital representation, analytics, repair planning	Optimizes the next information-bearing physical interrogation from the live posterior rather than assuming dense coverage as the acquisition product	No industrial robot fleet, deployment history, or proven inspection throughput
Evident OmniScan X3 [15]	Phased-array FMC/TFM/PCI with electronic focusing	High-resolution imaging, large apertures, fast TFM, qualified field instrument	Selects among movable bistatic geometry, waveform family, calibration, verification, and abstention under joint structural–metrology uncertainty	Far lower acoustic fidelity, channel count, resolution, and certification maturity
Eddyfi Sonyks/Teletest [16]	Long-range guided-wave pipe screening from a deployed ring/tool	Rapid long-distance corrosion screening with established procedure and training	Posterior-conditioned sequential experiment design targets unresolved competing hypotheses on a bounded surface	Does not match pipe-specific range, tooling, standards, or field credibility
Acellent SMART Layer [17]	Permanently bonded distributed PZT network; active or passive operation	Repeatable sensor geometry and integrated lifecycle SHM	Treats source/receiver placement and excitation as reconfigurable decision variables and explicitly arbitrates calibration versus diagnosis	Lacks permanent-network repeatability, ruggedization, and long-duration evidence
MISTRAS AEScout [18]	Passive acoustic-emission monitoring, up to four localized channels	Detects and locates active damage mechanisms during operation	Actively creates the next discriminating wave experiment and can request verification when passive evidence is unsupported	Cannot replace continuous AE monitoring or expert interpretation of active cracking
ARGUS NEO	Sparse movable source/receiver; sequential active excitation	Inspectable TG-CDI policy, low-channel reconfigurability, uncertainty, trust gating, audit trail	Candidate research/licensing layer for measurement-budget-limited or access-constrained inspection	Research prototype; no probability-of-detection study, blind-panel validation, certification, or production hardware

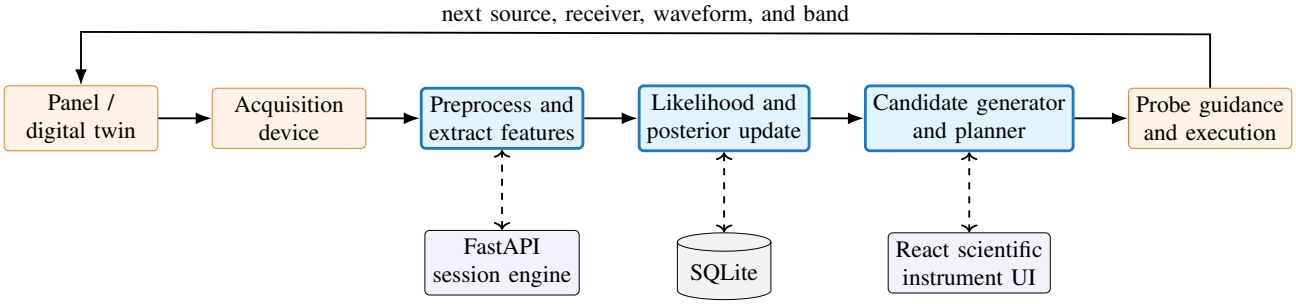


Fig. 1. ARGUS closed-loop architecture. The planner changes the next physical experiment; it does not merely classify a fixed waveform.

with fractional delays obtained by linear interpolation. For wave velocity c, attenuation α, and system delay t_0,

$$\tau_0 = t_0 + d_{sr}/c, \qquad A_0 = \frac{e^{-\alpha d_{sr}}}{1 + 4d_{sr}}, \tag{16}$$

$$\tau_z = t_0 + (d_{sz} + d_{zr})/c. \tag{17}$$

The defect resonance and scattered gain are

$$f_z = f_{\mathrm{mat}}(1.05 - 0.32q), \tag{18}$$

$$R_f = 0.72 + 0.72 \exp\left[-\frac{1}{2}\left(\frac{f_c - f_z}{1250}\right)^2\right], \tag{19}$$

$$A_z = 0.43\rho_T q \frac{\sqrt{r_x r_y}}{0.085} \frac{e^{-\alpha(d_{sz}+d_{zr})}}{1 + 5(d_{sz} + d_{zr})} R_f, \tag{20}$$

where $\rho_T = 1.00, 0.72, 0.86, -0.64$ for cavity, loose region, delamination, and dense inclusion, respectively. The negative dense-inclusion coefficient creates a phase inversion. Starting at τ_z,

$$r_z(t) = 0.11 A_z a \sin[2\pi f_r (t - \tau_z)] e^{-\beta(t-\tau_z)}, \tag{21}$$

where $f_r = f_z$ except for dense inclusions, for which $f_r = 1.12 f_z$. Noise $n(t)$ is Gaussian; $b(t)$ is a cumulative low-frequency random drift. The default material values are $c = 180$ m/s, $\alpha = 1.65$ m^{-1}, $f_{\mathrm{mat}} = 3100$ Hz, $\beta = 95$ s^{-1}, $t_0 = 0.8$ ms, and noise standard deviation 0.007.

This model is intentionally identifiable and fast enough for interactive candidate evaluation. It omits dispersion branches, anisotropic stiffness, boundary-mode conversion, transducer electromechanics, and spatially varying coupling. Consequently, simulation accuracy must not be confused with field accuracy.

VI. SIGNAL INTERPRETATION AND RECURSIVE BELIEF

A. Preprocessing and Features

The pipeline rejects nonfinite or shorter-than-eight-sample signals, removes the mean, and optionally applies a fourth-order zero-phase Butterworth bandpass from 250 Hz to $\min(7000, 0.96 f_s/2)$ Hz. Peak normalization is optional and disabled for feature extraction so amplitude remains informative. A Hann-windowed real FFT produces a unit-sum spectral

TABLE III
ARGUS RESPONSE FEATURES

Group	Features
Amplitude	RMS, peak, crest factor
Temporal	zero-crossing rate, envelope-peak time, $1/e$ decay time
Spectral shape	centroid, bandwidth, 85% rolloff, dominant frequency, normalized entropy
Spectral allocation	low-, mid-, and high-band energy fractions
Quality	RMS-to-robust-noise SNR in dB

energy distribution. Welch PSD, a short-time spectrogram, and a Hilbert envelope support inspection [20], [21].

Table III lists the 15 learned forward-response targets. The runtime inspector additionally returns a robust noise estimate. Low-, mid-, and high-band fractions span 250–1500, 1500–3500, and 3500–7000 Hz (clipped by Nyquist). Spectral entropy is normalized by the log of the number of FFT bins. Decay time is the first post-envelope-peak sample below $1/e$ of the peak. The noise scale is 1.4826 times the median absolute deviation (MAD) in the first 10% of the record.

B. Matched-Filter Spatial Likelihood

The inference engine subtracts the predicted healthy direct response, giving residual $v = y - \hat{y}_0$. It correlates v with the excitation using an FFT implementation, retains nonnegative lags, takes absolute magnitude, and applies a seven-sample maximum filter. Correlation is the classical matched-filter operation for a known waveform in noise [6].

For every grid-cell center j, the model predicts the bistatic delay

$$\hat{\tau}_j = t_0 + \frac{d(\boldsymbol{s}, \boldsymbol{z}_j) + d(\boldsymbol{z}_j, \boldsymbol{r})}{c}. \tag{22}$$

The correlation value at the nearest nonnegative lag is assigned to that cell, smoothed spatially by a Gaussian with $\sigma = 0.55$ cells, and robustly scaled between its 8th and 98th percentiles to $\tilde{C}_j \in [0, 1]$. The likelihood is

$$L(j) \propto \exp(T_{\text{eff}} \tilde{C}_j), \tag{23}$$

$$T_{\text{eff}} = 4.8 \,\text{clip}\left(\frac{\text{SNR} - 0.75}{1.8}, 0.30, 1\right), \tag{24}$$

where SNR is residual RMS divided by residual MAD scale. Scaling L to have mean one makes the Bayesian update numerically convenient without altering Eq. (10).

C. Estimation, Confidence, and Termination

ARGUS reports both the maximum-a-posteriori (MAP) grid center and posterior mean. The 2×2 covariance is the posterior-weighted covariance of cell coordinates and yields a confidence ellipse. Let m_{local} be posterior mass in a square neighborhood of radius $\max(1, \lfloor G/16 \rfloor)$ around the MAP cell. The displayed confidence is the bounded heuristic

$$Q = \text{clip}\{0.55 m_{\text{local}} + 0.45[1 - \bar{H}(P)], 0, 1\}. \tag{25}$$

The default controller stops when $Q \geq 0.72$, $\bar{H}(P) \leq 0.38$, or 12 experiments have been executed. A benchmark may impose a different budget; the reported study used ten.

VII. ADAPTIVE PHYSICAL EXPERIMENT PLANNER

A. Candidate Construction

The generator mixes eight perimeter locations with the eight highest-posterior cells as candidate sources. Receivers are the four perimeter corners plus the center. It cycles through bands 1.2–3.0, 2.2–4.4, and 3.4–6.2 kHz, with chirp, impulse, and chirp waveforms, amplitudes 0.42, 0.48, or 0.54, and 0.12 s duration. Near-coincident source–receiver pairs are redirected. Duplicate parameter tuples are removed until the default pool contains 48 candidates.

B. Counterfactual Hypothesis Disagreement

Let $\mathcal{K}$ contain the top $K = 24$ grid hypotheses, with represented posterior mass $M = \sum_{i \in \mathcal{K}} P(i)$ and normalized weights $w_i = P(i)/M$. For candidate e, the fast forward signature is

$$\boldsymbol{g}_i(e) = \left[\tau_i, \log(A_i + 10^{-8}), \sin\varphi_i, \cos\varphi_i\right], \quad \varphi_i = 2\pi f_c \tau_i, \tag{26}$$

where $A_i = 0.65 e^{-\alpha d_i}/(1 + 5 d_i)$. Delay and log-gain dimensions are divided by 0.18 ms and 0.55, respectively, while sine/cosine encode circular phase without wrap discontinuities. With scaled signature $\tilde{\boldsymbol{g}}$, pairwise distinguishability and disagreement are

$$D_{ij}(e) = 1 - \exp\left[-\tfrac{1}{2}\|\tilde{\boldsymbol{g}}_i(e) - \tilde{\boldsymbol{g}}_j(e)\|_2^2\right], \tag{27}$$

$$D(e) = \sum_{i,j \in \mathcal{K}} w_i w_j D_{ij}(e). \tag{28}$$

The bounded information-gain proxy is

$$I(e) = H(P) M D(e), \tag{29}$$

in bits. It grows with current uncertainty, posterior mass represented by the leading hypotheses, and predicted separability. It is not the expected value of Eq. (11) under a calibrated observation distribution.

Candidate coverage is

$$U(e) = \sum_{i \in \mathcal{K}} w_i \exp[-2.2 \min(d_{si}, d_{ir})]. \tag{30}$$

The implemented physical cost is

$$C(e) = 0.52 a^2 \frac{d}{0.12} + 0.48 \frac{\|\boldsymbol{s} - \boldsymbol{s}_t\|_2}{\sqrt{2}}, \tag{31}$$

with zero motion term for the first experiment. Redundancy is the closest match to any previous experiment:

$$R(e) = \max_{h < t} \exp[-6\|\boldsymbol{s} - \boldsymbol{s}_h\|_2] \exp[-2|f_c - f_{c,h}|/3000]. \tag{32}$$

The final score is

$$S(e) = I(e) + 0.35 D(e) + 0.22 U(e) - 0.16 C(e) - 0.22 R(e). \tag{33}$$

The highest-scoring candidate is selected. The interface exposes all terms for the top five candidates, preventing the planner from becoming an opaque recommendation engine.

Algorithm 1: ARGUS closed-loop localization

Input: panel model, stopping thresholds, budget B.
Set $P_0(j) \leftarrow 1/G^2$ and $\mathcal{D} \leftarrow \emptyset$.
for $t = 0, \dots, B-1$ **do**
  Form sources from perimeter and leading cells.
  Generate and deduplicate candidate experiments.
  Retain top-K posterior hypotheses.
  for each candidate e **do**
    Predict $\{\boldsymbol{g}_i(e)\}_{i=1}^{K}$.
    Compute $I(e), D(e), U(e), C(e), R(e)$.
    $S(e) \leftarrow I + .35D + .22U - .16C - .22R$.
  end for
  Set $e_{t+1} \leftarrow \arg\max_e S(e)$ and execute it.
  Acquire y_{t+1} and construct L_{t+1}.
  $P_{t+1} \leftarrow \text{normalize}(P_t \odot L_{t+1})$.
  Persist signal, features, scores, and posterior.
  break if confidence or entropy threshold holds.
end for
Return: MAP, mean, covariance, confidence, history.

C. Programmatic Explanation

The selected recommendation receives a deterministic rationale. High disagreement produces a competing-regions explanation; broad entropy produces a coverage explanation; otherwise the system describes local ambiguity resolution. If repetition is below 0.25 after prior measurements, the explanation notes that the geometry and frequency avoid recent experiments. No language model is required, and every statement traces to planner state.

VIII. Trust-Gated Counterfactual Dual Control

A. Joint Structural–Metrology State

The original spatial grid is retained as the structural marginal so earlier clients remain compatible, but NEO augments it with nuisance and metrology variables. The sequential state is

$$p_t(\boldsymbol{z}, \boldsymbol{\eta}) = p_t(x, y, r, q, k, \boldsymbol{\eta} \mid \mathcal{D}_t), \tag{34}$$

where (x, y) is location, r is effective size, q severity, k defect family, and $\boldsymbol{\eta}$ contains wave velocity, attenuation, timing offset, noise scale, gain, source/receiver coupling, and source/receiver pose error. The implemented compact approximation stores a normalized structural grid plus bounded Gaussian nuisance marginals and particles. It is therefore a factorized engineering approximation to Eq. (34), not an exact high-dimensional posterior.

Each valid observation updates the structural likelihood and the nuisance sufficient statistics. Estimated velocity and timing are synchronized back into inference so calibration actions alter subsequent predictions. Signal quality produces evidence weight $0 \le w_t \le 1$ from SNR, clipping, silence, acceleration deviation, and visual pose error. The recursive update is tempered as

$$p_{t+1}(\boldsymbol{z}) \propto p_t(\boldsymbol{z}) L(y_{t+1} \mid \boldsymbol{z}, e_{t+1}, \hat{\boldsymbol{\eta}}_t)^{w_t/T_t}, \tag{35}$$

where T_t also increases under mismatch. Silence or unusable acquisition cannot sharpen belief because its evidence weight approaches zero.

B. Dual Control: Diagnose or Calibrate

An action may interrogate the object or reduce uncertainty in the measuring process itself. Let U_s denote structural uncertainty, U_m combined metrology uncertainty, ρ model trust, and o the OOD score. NEO compares

$$V_{\text{cal}} = [U_m(0.70 + 0.30(1-\rho)) + 0.35o]\, d_n, \tag{36}$$

$$V_{\text{diag}} = \hat{I}(e) U_s \rho, \tag{37}$$

with diminishing-return factor $d_n = (1 + 0.65 n_{\text{cal}})^{-1}$. Calibration is selected when $V_{\text{cal}} - V_{\text{diag}} > 0.05$, or when an explicit threshold/OOD rule requires it. The dominant nuisance term maps to an executable direct-path, coupling-repeat, phone-pose, microphone-level, or frequency-sweep action. Otherwise NEO selects diagnostic, exploration, or pre-stop verification. This is a transparent heuristic dual controller whose components and switching margin are returned by the API.

C. Counterfactual Observation Distributions and Bayes Risk

For the leading hypotheses h_i, a candidate action e produces compact predicted distributions $q(y \mid h_i, e, \boldsymbol{\eta})$ rather than only a point score. The implementation combines standardized mean separation and predictive variance into average and worst-pair separation. Decision risk is explicitly parameterized:

$$R_t = 12 p_{\text{miss}} + 3 p_{\text{false alarm}}, \quad p_{\text{miss}} = \text{clip}(1 - c_t + 0.45 o_t), \tag{38}$$

and expected risk reduction is bounded by predicted information, separation, and model trust. The default multiobjective utility is

$$\begin{aligned} J(e) = {} & I(e) + 0.35 D(e) + 0.55 \Delta R(e) \\ & + 0.65 V_{\text{cal}}(e) + 0.30 \rho + \beta U(e) \\ & - 0.16 C(e) - 0.22 R(e) - 0.08 T(e) - 0.08 E(e), \end{aligned} \tag{39}$$

where β depends on exploration state. Alternative objectives expose information gain, Bayes risk, worst-case ambiguity, and information per physical cost. False-negative, false-positive, escalation, abstention, movement, time, and excitation losses are configuration values; they are research utilities, not certified maintenance economics.

D. Formal TG-CDI Policy

The compact implementation above is summarized by the following policy abstraction. Let $b_t(\boldsymbol{z}, \boldsymbol{\eta}) = p(\boldsymbol{z}, \boldsymbol{\eta} \mid \mathcal{D}_t)$, and let $\mathcal{H}_t = \{h_1, \dots, h_K\}$ contain spatially separated posterior modes rather than a fixed list of preselected defects. At model fidelity ℓ, the observation distribution predicted for rival h_i and executable action e is

$$q_{i,e}^{(\ell)}(y) = \int p_\ell(y \mid \boldsymbol{z}, \boldsymbol{\eta}, e) b_t(\boldsymbol{z}, \boldsymbol{\eta} \mid h_i)\, d\boldsymbol{z}\, d\boldsymbol{\eta}. \tag{40}$$

ARGUS approximates these distributions with forward-feature means and nuisance-dependent variances. Their weighted average separation $S_{\text{avg}}(e)$ combines Jensen–Shannon, Bhat-

Algorithm 2: TG-CDI interrogation cycle

Infer joint structural–metrology belief and trust.
Extract separated live rival modes $\mathcal{H}_t$.
Generate safe geometry–waveform–fidelity actions.
Predict $q_{i,e}^{(\ell)}$ for every rival and action.
Score average and hardest-rival separation and risk.
Score calibration, verification, exploration, and cost.
Execute the highest-supported safe action or abstain.
Validate quality/OOD; compute evidence exponent β_t.
Temper the belief update; update calibration/trust state.
Bind raw-data hash, model, rationale, and transition.
Stop, verify, escalate, or repeat under decision loss.

Fig. 2. The proposed TG-CDI sequence. Every decision is conditioned on the current belief, not a predetermined scan order.

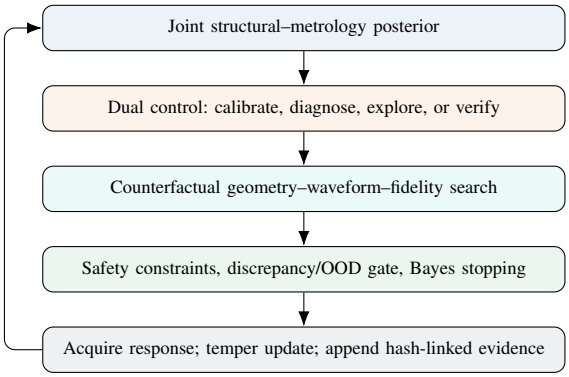


Fig. 3. ARGUS NEO closes inference, instrument calibration, experiment design, safety, and provenance in one recursive loop.

tacharyya, symmetric-KL, and predictive-variance terms. The hard-rival term

$$S_{\min}(e) = \min_{i \neq j} S\left(q_{i,e}^{(\ell)}, q_{j,e}^{(\ell)}\right) \tag{41}$$

prevents a high average score from hiding a pair of hypotheses that the proposed experiment cannot distinguish.

For a diagnostic action, let $G_z(e) = R_t - \mathbb{E}_y[R_{t+1} \mid e]$ be expected Bayes-risk reduction. For a calibration action, let $G_\eta(e) = H(\boldsymbol{\eta} \mid \mathcal{D}_t) - \mathbb{E}_y[H(\boldsymbol{\eta} \mid \mathcal{D}_t, y, e)]$. With trust $\rho_t \in [0,1]$, the conceptual action utilities are

$$\begin{aligned} U_D(e) &= \rho_t[w_z G_z + w_a S_{\text{avg}} + w_m S_{\min}] - C(e), \\ U_C(e) &= w_\eta G_\eta + w_\rho \mathbb{E}[\Delta\rho_t \mid e] - C(e), \end{aligned} \tag{42}$$

where $C(e)$ includes movement, time, excitation, repetition, constraint, and safety costs. Verification actions favor repeatability or an orthogonal high-trust check; exploration actions favor broad coverage. The controller selects

$$(a_t, e_t)^* = \arg \max_{(a,e) \in \mathcal{A}_{\text{safe}}} \{U_D, U_C, U_V, U_E, U_{\text{abstain}}\}. \tag{43}$$

When no safe candidate has positive supported value, or OOD/model-trust rules fire, abstention dominates. After execution, $\beta_t = \text{clip}(w_t\rho_t/T_t, 0, 1)$ gives the trust-gated update

$$b_{t+1}(\boldsymbol{z}, \boldsymbol{\eta}) \propto b_t(\boldsymbol{z}, \boldsymbol{\eta}) p(y_t \mid \boldsymbol{z}, \boldsymbol{\eta}, e_t)^{\beta_t}. \tag{44}$$

Calibration-only actions set the structural exponent to zero while updating nuisance state. Thus an accepted packet is not automatically treated as full-strength structural evidence. Equations (40)–(44) identify the TG-CDI coupling; Eqs. (37) and (39) give the present executable approximations.

E. Joint Geometry–Waveform and Horizon Search

Source position, receiver position, band, amplitude, duration, and waveform are optimized under hard limits. The candidate library supports impulse, sine, chirp, tone burst, Ricker, multisine, phase-coded, complementary-coded, and spectrally notched excitation. Every generated waveform is peak-normalized after modulation/coding, and actions exceeding frequency, amplitude, duration, minimum-spacing, no-go-region, or device-availability constraints are rejected with machine-readable reasons. A cached analytical level and physics-signature level are selected according to uncertainty, ambiguity, frequency, and trust. A beam-limited receding-horizon reranker evaluates one or two steps depending on the execution profile; this is short lookahead, not a global policy solution.

F. Discrepancy, OOD, and Decision Gating

An online ridge discrepancy model learns residual feature correction between predicted and observed responses and converts residual error to model trust $\rho \in [0,1]$. Robust residual distance, an ensemble disagreement score, and a conformal tail score are combined for OOD monitoring; the conformal component remains withheld until ten reference scores exist. Reported decision confidence is capped by OOD evidence. The stopping controller considers confidence, normalized entropy, credible-region area, Bayes risk, expected value of another measurement, budget, and model trust. It may continue, verify, escalate to a reference method, or abstain. These mechanisms reduce unsupported certainty but do not guarantee statistical calibration under physical domain shift.

G. Evidence, Replay, and Distributed Operation

Every state-changing event can be recorded as canonical JSON with timestamp, prior hash, and SHA-256 entry hash. Exported ZIP bundles contain a manifest, session state, ledger, responses, planner explanations, configuration, versions, and checksums; import verifies integrity before accepting the bundle. Replay readers support NPZ, CSV, and WAV response banks, while hidden truth remains sealed until the policy has stopped. SQLite-backed research jobs provide progress, cancellation, and interrupted-job recovery for counterfactual-bank generation, calibration, benchmarks, ablations, and surrogate studies. A phone progressive web application supplies camera overlay, inertial-quality metadata, and microphone acquisition; a reconnecting laptop edge client can register, heartbeat, poll, and return microphone measurements over a private LAN. These paths remain operator-supervised research tooling.

H. ARGUS-X Runtime Assurance and Failure Disposition

The extended system reports a normalized screening distribution over healthy/no-detectable-damage, known-damage-

candidate, and unknown/unsupported states. Let $p_d = \sigma(\ell_d)$ summarize accepted residual-SNR evidence, o the OOD score, and ρ model trust; unsupported mass uses $\max(o, 1-\rho)$ before renormalization. This transparent rule is not a calibrated correctness or POD claim. Separated posterior modes expose zero, one, or multiple candidate regions; interacting multi-scatterer inference remains open.

Each sensor channel maintains beta-binomial reliability

$$\hat{r}_j = \frac{\alpha_j}{\alpha_j + \beta_j}, \tag{45}$$

where accepted observations add quality-weighted evidence and rejections add failure evidence. Degraded channels cap confidence and request redundancy; unreliable channels force abstention. Session-baseline environment metadata provides drift warnings. Duplicate payloads/identifiers, invalid units or rates, non-finite samples, timestamp skew, clipping, silence, and infeasible actions are rejected before inference.

A persisted emergency latch blocks every acquisition path until a human supplies an acknowledgment and reason; both transitions are audited. Actions never include "structure safe": ARGUS may continue, reacquire/repair, mark a region for reference inspection, require a human, or report no damage evidence only under tested conditions.

The 1,331-item ARGUS-X inventory is converted deterministically into a register: 277 narrow controls are tested, 588 partially mitigated, 244 require physical validation, 45 require literature/legal review, and 177 are bounded. These are dispositions, not 1,331 solved claims.

IX. Learned Forward Surrogate and Data

A. Domain-Randomized Synthetic Set

The optional learned component approximates expected response features, not the final posterior. Each row contains 24 inputs describing defect state, panel/material nuisance variables, and experiment parameters, and 15 outputs from Table III. Three thousand examples were generated with locations in $[0.08, 0.92]^2$, radii 0.04–0.14, severity 0.35–0.96, all four defect types, panel sizes 0.45–0.85 by 0.30–0.60 m, velocity 145–245 m/s, attenuation 1.0–2.4 m^{-1}, resonance 2.5–4.2 kHz, damping 70–135 s^{-1}, noise 0.003–0.014, and randomized probes, bands, amplitudes, and waveforms.

The PyTorch [22] network is

$$24 \to 96 \to 96 \to 15, \tag{46}$$

with SiLU activations and LayerNorm after the first hidden layer. Inputs and targets are standardized on training statistics. Training uses Smooth L1 loss, AdamW at learning rate 1.8×10^{-3} and weight decay 10^{-4}, batch size 128, a seeded 70/15/15 split, and early stopping. The physics predictor remains the default planner model because it is interpretable and the surrogate has uneven feature accuracy.

B. Measured LMSD Adapter

The downloader queries the official Zenodo record, downloads declared NPZ files, and verifies each published MD5 checksum. The adapter converts each complex 0–1600 Hz FRF to a 0.12 s impulse response, normalizes known node coordinates, encodes the added mass as a dense inclusion, and extracts the same feature contract. Six scenarios times seven sources times seven receivers yield 294 channels. To prevent leakage, splitting is by entire damage scenario: 196 training, 49 validation, and 49 test channels. These channels are correlated views of six physical damage configurations, not 294 independent defects.

C. Measured Acoustic and Paired Localization Bridges

A second checksum-verifying adapter processes the TU Darmstadt GFRP acoustic dataset [23]: 2,568 unaugmented microphone taps from eight 360 by 280 mm plates, including 2,100 intact and 468 defect-labelled point measurements. Signals are rationally resampled from 51.2 to 16 kHz and converted by the production feature contract. Splitting holds out complete physical plates. Separate healthy/damage robust CORAL maps align synthetic and measured first/second feature moments, while a robust empirical reference uses only gain-insensitive features. For external physical acquisitions, only the upper 10% measured-reference tail contributes to OOD caution or abstention; simulation sessions are unaffected.

The Bologna acoustic-emission record [24] adds 1,000 ray-traced Tx–Rx paths with fourth-order boundary reflections and 27 measured channels from nine known impact positions on a $1\times1\times0.003$ m aluminium plate. Its 2 MHz, 250 kHz domain is not mixed with the low-frequency GFRP waveforms. It instead supports a separate simulation-transfer timing benchmark and a measured few-shot localization calibration. Repository files are accepted only after publisher-declared size and MD5 verification, and manifests preserve record, DOI, license, and selected-file provenance.

X. Physical and Software Realization

A. Acquisition Abstraction

All devices implement connect, disconnect, acquire, and status operations. `SimulationDevice` executes Eq. (15); `MicrophoneDevice` records through the local audio stack; `UploadedSignalDevice` accepts WAV files; and `SerialProbeDevice` performs a line-framed transaction with an ESP32. Missing audio or serial hardware is reported without disabling simulation.

Uploads are limited to 10 MB, checked for allowed media types, decoded in memory, downmixed to mono, resampled by polyphase filtering, checked for finite values, and padded or truncated to the configured duration. The API never accepts arbitrary filesystem paths. Simulation ground truth is omitted from ordinary session payloads until reveal.

B. Calibration and Coordinates

The startup routine executes three chirps across distinct geometries and estimates noise standard deviation, effective propagation velocity, baseline RMS, and resonance. During a session, the dual controller can additionally request direct-path timing, repeated coupling, phone-pose, microphone-level, or frequency-sweep calibration. Values update the nuisance posterior and are persisted in the panel's calibration profile. Normalized coordinates keep the planner independent of physical dimensions, while the UI presents millimeters using Eq. (6).

A camera-guidance mode asks the operator to click the four panel corners in top-left, top-right, bottom-right, bottom-left order. Eight homography parameters are solved from the four point correspondences [25]. The browser overlays source, receiver, propagation path, posterior field, suspected region, and a 90% covariance ellipse. Visual-position error and inertial deviation are sent as quality metadata and reduce evidence weight; this remains approximate operator guidance, not certified optical metrology.

C. ESP32 Probe

The reference firmware uses GPIO25 for an exciter-driver control, GPIO34 for a conditioned analog sensor, GPIO2 for status, and 115200 baud serial. It accepts `PING` and an `EXPERIMENT` command containing frequency, amplitude, duration, waveform, and sample rate, then returns `BEGIN`, framed `DATA`, and `END`. An exciter must be driven through a MOSFET/transistor or amplifier; it must not be powered directly from a GPIO. A piezo input requires current limiting, clamping, biasing, and conditioning so the ADC never sees negative voltage or an overvoltage transient.

D. Persistence and Reproducibility

Additive SQLite migrations preserve legacy sessions while storing joint state, probes, events, research jobs, model records, and hash-linked ledger entries in addition to session configuration, calibration, compressed responses, features, candidate scores, and posterior history. NumPy/SciPy provide vectorized numerics and signal processing [26], [27]. Fixed seeds cover defect generation, observation noise, dataset splitting, training, and paired policy comparison. The API schema and saved JSON/CSV/SVG outputs allow an independent run to inspect reported metrics.

XI. Evaluation Protocol

The evaluation addresses four questions:

- **RQ1:** Does active planning concentrate spatial belief faster than random or uniform probing?
- **RQ2:** Does lower uncertainty translate into lower localization error under the same budget?
- **RQ3:** Can a small learned surrogate reproduce domain-randomized signal features?
- **RQ4:** Do those learned features transfer across held-out physical damage scenarios?
- **RQ5:** What experiment would be required to establish the proposed TG-CDI technical effect?

For RQ1–RQ2, 30 medium-preset defects were generated with seeds 100–129. Each of three policies operated on the identical hidden defect for a maximum of ten measurements. *Random* sampled continuous source and receiver positions and a frequency band. *Uniform grid* followed a fixed geometry sequence. *ARGUS* used Eq. (33). Policies were compared using mean and median localization error, normalized final entropy, entropy reduction, entropy area under the measurement curve (AUC), physical cost, experiment count, and success within 10, 15, 20, and 30 mm. Paired bootstrap 95% intervals were computed over the shared cases. No assertion required error to improve monotonically.

For RQ3, the 3000-example synthetic model used seed 23 and independent random splitting. For RQ4, the LMSD model used the same architecture and seed but held out complete scenarios. Smooth L1 values across these two data regimes are not directly comparable because their target statistics and split difficulty differ.

RQ5 is a prospective, preregistered test rather than a result in this paper. On a complete physical response bank, compare TG-CDI against raster coverage, a uniform sequence, random selection, fixed-network reconstruction, entropy-only active selection, calibration-disabled TG-CDI, trust-disabled TG-CDI, and worst-rival-disabled TG-CDI. Freeze losses and stopping thresholds before revealing blind truth. Primary endpoints should be measurements and physical cost to reach a fixed decision-risk threshold; secondary endpoints should include localization error, probability of detection with confidence bounds, false-stop rate, abstention rate, calibration coverage, remount repeatability, temperature-shift robustness, and wall-clock time. The differentiating hypothesis survives only if the full policy improves the prespecified primary endpoint without an unacceptable false-negative or unsupported-stop penalty.

XII. Results

A. Planner Benchmark

Table IV reports the saved benchmark, not hand-entered target values. ARGUS achieved the lowest mean error, final entropy, entropy AUC, and mean experiment count. At 15 mm it localized 73.3% of cases, versus 56.7% for random and 60.0% for the grid. At 20 mm all methods reached 93.3%; therefore the strongest separation occurs at the tighter 15 mm criterion.

Relative to random probing, ARGUS lowered final entropy by 15.9%, lowered mean error by 7.8%, and used 2.9% less modeled cost. Relative to the grid, it lowered final entropy by 32.5% and mean error by 7.0%, but used 4.3% more modeled cost. The result illustrates Eq. (1): information efficiency and physical cost are related but distinct objectives.

Figure 4 shows mean trajectories. ARGUS does not dominate localization error at every intermediate step; its mean error is especially high after the second measurement and briefly rises again after the sixth. This is permissible in a noisy

TABLE IV
PAIRED SIMULATION BENCHMARK: 30 MEDIUM-PRESET DEFECTS, TEN-EXPERIMENT BUDGET

Policy	Mean error (mm)	Median error (mm)	Mean exp.	Final $\bar{H}$	Entropy red.	Entropy AUC	Cost	≤ 15 mm (%)	≤ 20 mm (%)
Random	13.38	14.44	10.00	0.498	0.502	0.748	2.665	56.7	93.3
Uniform grid	13.26	13.84	10.00	0.621	0.379	0.818	**2.481**	60.0	93.3
ARGUS	**12.33**	**13.28**	**9.83**	**0.419**	**0.581**	**0.740**	2.588	**73.3**	93.3

TABLE V
PAIRED ARGUS ADVANTAGES (95% BOOTSTRAP CI)

Comparison	Mean error advantage (mm)	Mean entropy advantage	Win rate (error / entropy)
vs. random	1.048 $[-0.667, 2.812]$	0.079 $[0.063, 0.095]$	0.30 / 0.93
vs. grid	0.928 $[-1.021, 2.757]$	0.202 $[0.180, 0.224]$	0.30 / 1.00

TABLE VI
OBSERVED ARGUS NEO DIAGNOSTIC RUNS

Run	Cases	Key error	Key uncertainty	Interpretation
Nine-policy quick matrix	2	NEO 21.70 mm	$\bar{H} = 0.909$	No crite-rion/compression
Quick calibration	4	Old score 0.715	Coverage 1.0	Event mismatch; deprecated
Mismatch, seed 17	1 paired	14.65 vs. 157.54 mm	NEO caution/OOD	Mechanism demo only
Active surrogate	180	MAE 94.10→89.01	5.41% decrease	Synthetic oracle only

recursive estimator and reinforces why entropy and error must both be reported.

Paired results in Table V qualify the aggregate means. ARGUS reduced final entropy in 28/30 cases versus random and 30/30 versus grid, with both confidence intervals above zero. In contrast, both mean-error intervals include zero and strict error win rate is 30%. Thus RQ1 is supported in this simulator, while RQ2 remains suggestive rather than statistically established. Tied MAP cells and a few large improvements explain why mean error can improve despite a low strict-win fraction.

B. Historical NEO Engineering Diagnostics

The following saved diagnostics precede the 20 September audit corrections. They are retained for provenance, not current-version validation. The historical ECE value below compared a heuristic score with a different 20 mm event and is not a valid probability-calibration certificate. Current reliability evaluation compares posterior mass within 20 mm with the corresponding localization event. Table VI reports newly executed, seeded checks of the expanded implementation. They are deliberately separated from the 30-case baseline because the quick NEO matrix contains only two cases and a five-measurement budget. None of nine policies met the joint stopping criterion, all used five measurements, and therefore observed inspection compression was $1.0\times$. Full NEO mean error was 21.70 mm and success within the configured radius was 0.50; uniform, Bayes-risk-only, dual-control-only, and one-step horizon variants were 15.95 mm and 1.00 in these two cases. This is a pipeline smoke test and supplies no basis for a superiority claim.

TABLE VII
CURRENT SYNTHETIC CHECK: SIX PAIRED SEEDS PER CONTEXT

Context	Legacy mean error	Risk mean error
Nominal	43.90 mm	12.58 mm
Mismatch + noise	150.22 mm	203.78 mm

The historical mismatch demonstration altered effective velocity by 2% and attenuation by 4% under the same hidden truth, seed, and budget. NEO used eight diagnostic, three calibration, and six verification actions, ended at 14.65 mm error, model trust 0.517, and a caution state. The deliberately naive controller used 15 diagnostic and no calibration actions, ended at 157.54 mm with confidence 0.735, and triggered the false-confidence diagnostic. This one paired case illustrates the intended mechanism in that earlier implementation; it is neither an estimated effect size nor evidence of physical generalization. In four calibration smoke cases, nominal 50–95% region coverages were all 1.0. The accompanying 0.715 proxy-event mismatch score is deprecated, not a valid ECE estimate. Tiny-sample apparent coverage must not be advertised as calibration.

C. Current Synthetic Audit Evaluation

The optional physical-loss controller was compared with the legacy proxy using six separate seeds (53000–53005), six measurements per run, twelve shared diagnostic candidate opportunities per step, and two acquisition contexts. All 24 runs completed without an execution failure; source fingerprints did not change during the run. The mismatched context used effective velocity multiplied by 1.02, attenuation by 1.04, and noise by 2. Truth was used for scoring, not action selection. Table VII reports both outcomes, without discarding unfavourable cases.

The mean error advantage of the risk controller was 31.32 mm with a paired bootstrap 95% interval of $[-2.71, 93.38]$ mm in nominal conditions, and -53.56 mm with interval $[-174.99, 17.82]$ mm under mismatch. Both intervals cross zero. One legacy outlier strongly affects the nominal mean; success within 20 mm was 5/6 for both controllers nominally and 0/6 for both under mismatch. Computation averaged about 21 seconds per six-measurement case for the risk controller versus 0.35–0.39 seconds for legacy on this machine. The risk controller remains disabled by default. This small study establishes neither superiority, calibration benefit, measurement compression nor acceptable real-world accuracy.

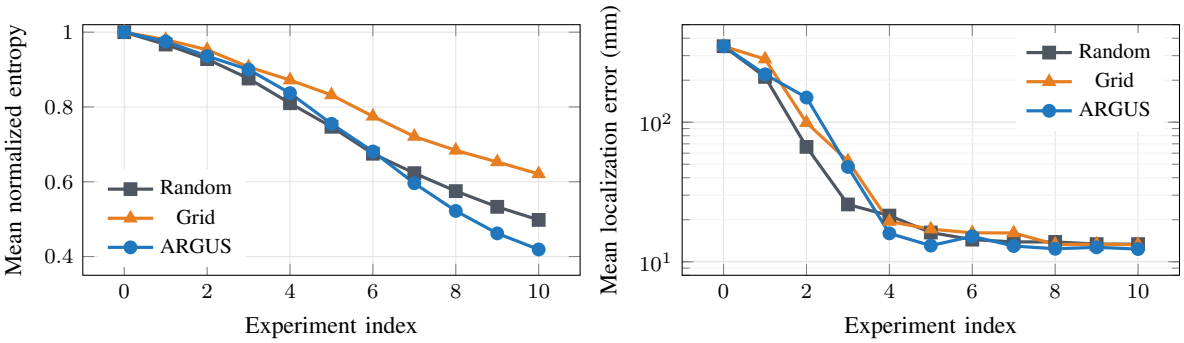


Fig. 4. Mean uncertainty (left) and localization-error (right, logarithmic axis) trajectories over the same 30 hidden defects. Lower is better.

TABLE VIII
LEARNED FORWARD-RESPONSE EVALUATION

Data	Samples	Test Smooth L1	Std. MAE	Mean R^2	Split
Synthetic	3000	0.2245	0.5014	0.4092	seeded 70/15/15
LMSD measured	294	0.1902	0.4485	0.0010	held-out scenario

Synthetic best R^2: SNR 0.910, RMS 0.861, peak 0.825, crest 0.758, decay 0.622. Synthetic weak examples: dominant frequency -0.019, envelope-peak time 0.016.

The full artifact is `research_results/audit_risk_validation.json`.

D. Historical Forward-Surrogate Results

The following table records the earlier 3,000-sample checkpoint. Current metadata instead records 15,000 synthetic samples, validation loss 0.18470, test loss 0.19815, standardized MAE 0.45690, and mean feature $R^2 = 0.47567$. Neither checkpoint establishes defect-localization accuracy or a validated live-controller surrogate. The synthetic surrogate stopped at epoch 27. Table VIII shows that amplitude, decay, and SNR-related features are learnable under domain randomization, while dominant frequency and envelope timing are poorly captured. Mean feature $R^2 = 0.409$ is useful as an engineering diagnostic but not sufficient justification to replace the physics signature in safety-relevant planning.

The measured LMSD scenario-held-out result is much weaker: mean $R^2 = 0.001$ and standardized MAE 0.449. High-band energy alone achieved $R^2 = 0.875$; many other features were negative out of sample. The adapter therefore demonstrates an honest data path and exposes domain shift rather than validating physical generalization. In particular, test Smooth L1 0.190 should not be interpreted as better than the synthetic 0.225 because the standardized targets and held-out units differ.

E. Measured-Domain Bridge Results

Table IX reports two scoped real-data checks. The GFRP detector uses four-fold GroupKFold with complete plates held out; repeated taps, sides, runs, and points from a held-out plate cannot enter training. Balanced accuracy was 0.775, ROC–AUC 0.911, average precision 0.699, F1 0.634, and Brier score 0.097. These are pointwise screening results, not arbitrary multistatic localization.

TABLE IX
SCOPED MEASURED-DOMAIN BRIDGE RESULTS

Record/task	Split	Primary result	Scope limit
GFRP acoustic detection	held-out plate	Bal. acc. 0.775; AUC 0.911	pointwise taps
Al impact, simulation transfer	held-out position	Mean error 0.175 m	one plate
Al impact, measured few-shot	held-out position	Mean error 0.141 m	eight calibration points

For the aluminium impact record, direct simulation transfer produced 0.175 m mean localization error. A three-neighbour measured localizer trained on eight positions and tested on the ninth reduced the leave-one-position-out mean to 0.141 m, or 19.6%. An affine timing correction increased the mean to 0.197 m and was therefore rejected by a negative-transfer guard. The improvement demonstrates the value of a small measured calibration set, but one plate, nine interior positions, and transient impacts cannot validate persistent hidden-defect localization.

F. Software Verification

The dated audit report records executed regression-suite counts and commands. Tests cover deterministic simulation, posterior normalization, planning, acquisition contracts, API persistence, evidence integrity, and quality gates. New regressions verify rank-one calibration information, different-distance identifiability, preservation of coupling uncertainty without independent evidence, OOD-before-fusion, rejection of stale verification, anchored detection of a rehashed history, and stereo/unsigned PCM normalization. Twenty-four frontend tests, lint, type checking, and the production build pass. Live HTTP and API checks do not substitute for visual browser inspection or physical-device validation. The observed HTTP-test-client deprecation warning is not an execution failure.

XIII. TECHNICAL DIFFERENTIATION AND CANDIDATE PROTECTABLE NUCLEUS

The system-level research hypothesis is that hidden-state inference becomes more reliable and measurement-efficient when the controller may improve both the object estimate and the instrument estimate. Seven coupled aspects distinguish the implemented prototype:

1) **Live rival construction:** separated modes are extracted from the current posterior, so the next experiment targets the ambiguity that actually remains.
2) **Joint actionable uncertainty:** structural and metrology marginals determine the next action, rather than being passive confidence displays.
3) **Dual control:** the same policy selects calibration, diagnosis, exploration, verification, or abstention using explicit switching value.
4) **Counterfactual physical co-design:** geometry, frequency, amplitude, duration, waveform code, and fidelity are scored by the observation distributions expected under each live rival, including the hardest pair.
5) **Trust-gated evidence:** quality, channel reliability, model discrepancy, and OOD evidence control the strength of the physical likelihood instead of merely changing a displayed confidence score.
6) **Constraint-aware execution:** infeasible frequency, amplitude, spacing, no-go, and unavailable-device actions are rejected and explained before execution.
7) **End-to-end auditability:** decomposed alternatives, deterministic explanations, raw-response checksums, posterior evolution, model identity, and decisions form a verifiable evidence chain.

The potentially protectable technical nucleus, subject to legal review, is not "AI for defect detection," a generic digital twin, Bayesian localization, sensor placement, self-calibration, information gain, waveform selection, or hashing in isolation. A narrower candidate nucleus is the hardware-anchored TG-CDI sequence that (i) maintains coupled structural and measurement-system uncertainty, (ii) forms current rival structural modes and their action-conditioned acoustic-response distributions, (iii) decides whether the next physical act should calibrate the instrument or discriminate the hardest structural rivals, (iv) co-designs an executable source–receiver–waveform–fidelity action under decision loss, discrepancy, and safety constraints, (v) uses reliability and model-domain evidence to temper or suppress the structural likelihood and to trigger verification or abstention, and (vi) binds the executed action, observation, rationale, posterior transition, and model identity into a replayable integrity chain.

Table X is a technical differentiation map, not a legal claim chart. It shows why the argument must rest on the ordered interaction among elements rather than ownership of established components.

This positioning does not establish novelty or non-obviousness. The reviewed references already cover important subsets, and additional patents may be closer. A practitioner could also argue that combining Bayesian design, calibration, robust updating, and audit logging is obvious. The counterargument must identify a concrete technical interaction and measured effect—for example, that hardest-rival planning plus calibration arbitration and trust-tempered evidence reaches a prespecified decision risk with fewer safe physical interrogations under sensor/model shift. Only a professional, jurisdiction-specific search, element-by-element chart, inventorship review, and prosecution strategy can determine patentability, eligible subject matter, and freedom to operate.

Commercially, TG-CDI is best positioned as adaptive inspection-orchestration middleware for low-channel, movable-probe, measurement-budget-limited, or access-constrained workflows. It could complement a robot, phased-array instrument, guided-wave tool, permanent SHM network, or acoustic-emission service rather than claim to replace their qualified acquisition hardware. The sellable proposition is a measurable reduction in inspection actions or decision cost at matched detection/false-alarm risk, plus calibrated abstention and replayable evidence. That proposition remains prospective until the blind physical study in Section XV is complete.

XIV. Limitations and Threats to Validity

A. Model and Inference Limits

The simulator is nondispersive and uses a single effective velocity. A real composite plate supports multiple dispersive, anisotropic modes and boundary reflections. The public structural marginal remains a one-dominant-anomaly location grid; size, severity, and type support in the joint interface is compact and not a validated multi-defect reconstruction. Baseline subtraction assumes the nominal digital twin is sufficiently calibrated. Multiplying successive likelihoods assumes conditional independence after approximate nuisance correction, while shared error can still make confidence over-sharp.

Confidence in Eq. (25) is a heuristic mixture, not a calibrated posterior coverage probability. The historical ECE compared that proxy with a different event and has been deprecated; a corrected event-matched reliability calculation still requires independent physical validation. The planner utilities and cost conversion were engineered rather than elicited from a certified maintenance process. The conformal tail is withheld before ten scores and is only meaningful if future calibration scores are exchangeable with deployment. The block-structured state, locally Gaussian propagation covariance, compact counterfactual features, online ridge correction, and bounded lookahead are deliberate approximations.

B. Evaluation Limits

Thirty baseline synthetic cases provide a useful paired study, not population-scale validation. The baseline mean-error intervals cross zero; no claim of superior physical localization is warranted. The expanded NEO matrix has only two cases and is exclusively a software/research smoke test. Baselines do not include every advanced tomography, Gaussian-process design, reinforcement-learning, or optimal-array method. Hyperparameters were not evaluated in a nested holdout, and most studies share simulator assumptions with inference.

The LMSD experiment has only six independent damage scenarios, several with multiple masses. Hammer/accelerometer FRFs at 0–1600 Hz differ from the prototype's 1.2–6.2 kHz chirp interrogation. Added masses are

TABLE X
CLAIM-ORIENTED TECHNICAL DIFFERENTIATION MAP (NOT A PATENTABILITY OPINION)

Element	Crowded category	TG-CDI-specific coupling proposed for examination	Intended technical effect / evidence still required
Joint belief	Bayesian localization and nuisance estimation [5]	Both structural and metrology uncertainty are actionable inputs to one physical-action controller	Avoid diagnosing an instrument error as damage; prove on calibration-shift specimens
Live rivals	Multi-path prediction and guided-wave localization [11]	Posterior modes generate candidate-specific response distributions; score both average and worst-pair separation	Direct the next shot at the unresolved ambiguity; prove fewer shots at fixed decision risk
Action arbitration	Bayesian placement, active calibration, digital twins [4], [7], [13]	A single safe action set competes across diagnose, calibrate, verify, explore, and abstain using state-dependent value	Spend a scarce measurement on the object or the instrument as warranted; ablate each branch
Physical co-design	Phased arrays, fixed networks, waveform imaging [10], [12]	Movable bistatic coordinates, waveform, and fidelity are jointly chosen for the live rivals under access/cost limits	Reduce required placements for constrained inspection; prove against raster, fixed-grid, and entropy-only policies
Trust-tempered update	Robust inference and OOD detection	Quality, accumulated channel reliability, model discrepancy, and OOD determine a likelihood exponent, including zero	Prevent unsupported posterior sharpening; prove false-stop and coverage behavior under shift
Evidence binding	Industrial traceability and integrity logging	Alternative scores, executed physical settings, raw-response hash, model identity, and posterior transition share one causal record	Reproduce why a measurement was selected and how it changed belief; perform independent replay/tamper audit

scattering surrogates, not cavities or delaminations. Scenario-held-out performance correctly reveals that correlated channel count cannot replace independent physical diversity.

C. Operational Limits

Microphone measurements are vulnerable to airborne sound and ambient noise. Probe remounting changes coupling. Camera homography assumes a planar stationary panel and accurate clicks; inertial/visual metadata are quality proxies, not traceable metrology. Clock-skew checks, heartbeats, and reconnect logic do not provide hard real-time synchronization. ESP32 analog acquisition needs safe conditioning and synchronized excitation. The prototype is not certified NDE equipment and must not be used as the sole basis for safety-critical maintenance decisions.

XV. PHYSICAL VALIDATION AND DATA-COLLECTION PLAN

A credible next study should use at least three nominally identical panels, eight repeatably mounted perimeter transducers, an instrumented exciter, five repeats per condition, and healthy measurements before and after each damage block. Reversible bonded masses, damping patches, or paired magnets are appropriate for commissioning. True cavities or delaminations require manufactured specimens—for example flat-bottom holes or embedded release films—and independent truth from ultrasound, radiography, or destructive sectioning where justified.

For the current acquisition contract, collect all 56 ordered non-self source–receiver pairs, three frequency bands, and five repeats. One physical state yields $56 \times 3 \times 5 = 840$ waveforms. Twenty known locations plus healthy references yield approximately 17,000 signals. Preserve raw waveforms and record specimen, material, thickness, defect geometry and truth method, source and receiver coordinates, excitation, repeat, temperature, humidity, coupling force, remount identifier, calibration, timestamp, and code version.

Split development data by complete defect location, stronger validation by complete specimen, and the final test by a blind panel whose truth remains hidden until predictions and stopping decisions are frozen. Offline planner evaluation additionally needs a complete counterfactual bank: every admissible experiment must be recorded for every hidden state so all policies query the same physical response table. Report error versus measurement budget, entropy calibration, success radii, abstention, remount robustness, and temperature shift.

XVI. REPRODUCIBILITY

The repository provides commands for the complete workflow:

```
python run_argus.py
python run_edge_node.py --help
python scripts/run_neo_demo.py
  model_mismatch
python scripts/neo_benchmark.py --cases 2
python scripts/neo_benchmark.py --ablation
python scripts/neo_calibration.py --cases 4
python scripts/generate_counterfactual_bank.py
  tiny
python scripts/active_learn_surrogate.py
  --cases 180
python scripts/demo_simulation.py
python scripts/evaluate_model.py
python scripts/generate_dataset.py
python scripts/train_model.py
python scripts/download_lmsd_dataset.py
python scripts/prepare_lmsd_dataset.py
pytest
cd frontend
npm test
npm run lint
npm run build
```

The externally downloaded data are intentionally excluded from version control; DOI, license, source filenames, and checksums are preserved. Trained metadata records seeds, split units, sample counts, feature names, per-feature MAE, and R^2. Benchmark JSON preserves per-case trajectories and summary values. Evidence exports independently preserve the effective configuration, versions, ledger chain, planner alternatives, and response checksums. Every result in the NEO diagnostic table is labeled simulated unless a measured source is explicitly identified.

XVII. Research Extension: Nuisance-Marginal Arrival-Time Design

This extension, implemented after the earlier studies, replaces the diagnostic information proxy with a numerically integrated information calculation for an explicit, approximate observation model. It is an opt-in research mode, not an efficacy claim. The established planner remains the default.

The 80-run study below belongs to the pre-audit source version. The 20 September revision adds velocity–timing covariance to the arrival variance; those older results must not be attributed to the changed model. The separate physical-loss controller and its 24-run evaluation are described in the main text.

A. Prior Art and Scope

Nuisance-aware Bayesian experimental design is established: Bartuska et al. derive small-noise approximations for nuisance marginalization [28]. Robust information design under prior ambiguity is also established [29]; ARGUS does not implement that criterion or inherit its guarantees. In the directly adjacent acoustic domain, Raorane et al. optimize sensor-cluster placement for acoustic-emission source localization in isotropic plates and include physical validation [30]. Consequently, acoustic localization combined with information-based sensing cannot be claimed as a new principle here. The narrower contribution is an inspectable implementation of live posterior-region compression, nuisance-marginal scalar design, numerical diagnostics and paired evaluation within the sequential bistatic-interrogation workflow. Its legal novelty and commercial superiority have not been established.

B. Mass-Preserving Spatial Compression

Let p_i denote posterior mass at cell position $\boldsymbol{x}_i$, expressed in physical metres. Up to five spatial representatives define nearest-centre regions R_k using physical Euclidean distance. Unlike renormalizing only the representative cells, the regional weights preserve the entire posterior:

$$w_k = \sum_{i \in R_k} p_i, \qquad \sum_k w_k = 1, \qquad q_{i|k} = p_i / w_k. \tag{47}$$

For source $\boldsymbol{s}$ and receiver $\boldsymbol{r}$, define $L_i = \|\boldsymbol{x}_i - \boldsymbol{s}\| + \|\boldsymbol{x}_i - \boldsymbol{r}\|$. The region-conditioned expectation and variance of this bistatic path are computed using $q_{i|k}$. With nuisance posterior means b for timing offset and v for velocity, the approximate regional arrival distribution is

$$Y \mid K = k, e \sim \mathcal{N}(\mu_k, \sigma_k^2), \tag{48}$$

$$\mu_k = b + \mathbb{E}_k[L]/v, \tag{49}$$

$$\begin{aligned} \sigma_k^2 = {} & \mathrm{Var}_k[L]/v^2 + \sigma_{\mathrm{meas}}^2 + \sigma_b^2 \\ & + \mathbb{E}_k[L^2]\sigma_v^2/v^4 + \sigma_{\mathrm{pose},k}^2 \\ & - 2\mathbb{E}_k[L]\,\mathrm{Cov}(v,b)/v^2. \end{aligned} \tag{50}$$

The pose term propagates independent source/receiver placement second moments through first-order path gradients, scaled by the actual panel dimensions. Coincident probe/cell geometry uses a conservative finite sensitivity rather than an undefined derivative. A scalar pose bias without a known direction is included through its squared magnitude. These are assumptions, not measured pose-error distributions.

The measurement floor is $\sigma_{\mathrm{meas}}^2 = 1.5\times10^{-8} + (3/f_s)^2/3$ in seconds squared, combining the existing model floor with an approximate matched-filter sampling neighbourhood. It is not a learned timing calibration or a waveform-dependent precision bound. Moment matching and first-order nuisance propagation make this a surrogate for the real observation likelihood.

C. Information Calculation and Numerical Audit

For Gaussian density f_k, the design utility is

$$I(K; Y \mid e) = \sum_k w_k \int f_k(y) \log_2 \frac{f_k(y)}{\sum_j w_j f_j(y)}\, dy. \tag{51}$$

It targets the regional latent variable K, not exact cell location or the full waveform. Deterministic Gauss–Hermite quadrature uses 24 and 48 nodes, increasing to 96 when their difference exceeds 0.002 bits. Log-sum-exp evaluation avoids direct mixture underflow. The implementation reports raw information, the clamp to $[0, H(K)]$, node count and last-order difference. That difference is a numerical diagnostic, not a certified error bound. Independent adaptive integration tests check a nontrivial mixture; other tests check identical-response and separated-response limits, unit invariance, physical-coordinate partitioning and non-mutating planning.

For compatibility with existing multiobjective weights, the legacy-named API score becomes $I(K; Y \mid e)T/\max\{\log_2 K, 1\}$, where T is model trust. Unscaled information is exposed separately in bits. The remaining cost, waveform, repetition, constraint and baseline-guard terms are retained; this is not a pure mutual-information maximizer. A nuisance penalty compares the nominal and marginalized information, with the signed change also retained. Region-dependent variances can themselves convey information, so arbitrary heteroscedastic nuisance changes do not imply monotonic information loss.

D. Frozen Paired Synthetic Evaluation

The protocol reserved seeds 41000–41019 before evaluation, distinct from pilot seeds 31000–31005. Each method receives exactly eight acquisitions and 24 shared candidate opportunities per step, independent of truth and the method's posterior. Candidate and acquisition random streams are controlled separately. The production inference and calibration controller remain active; the planning horizon is one. A second context changes acquisition velocity by $+2\%$, attenuation by $+4\%$ and noise by $\times 2$, without giving these changes to the inference model. All 80 runs completed, with no execution or measurement-rejection failures. Source fingerprints were unchanged during evaluation. Table XI reports physical MAP error.

Define paired advantage as established error minus nuisance-aware error. The nominal mean advantage is 0.014 mm, with 95% paired-bootstrap interval $[-2.24, 2.94]$ mm:

TABLE XI
HELD-OUT FIXED-CANDIDATE SYNTHETIC ABLATION. ERRORS IN MM; 20 SEEDS PER CONTEXT AND METHOD, EIGHT ACQUISITIONS PER RUN.

Context	Method	Mean	Median	P90	> 30 mm
Nominal	Established	15.12	13.85	23.80	1/20
Nominal	Nuisance	15.10	15.20	20.43	1/20
Stress	Established	180.14	191.93	285.29	17/20
Stress	Nuisance	146.56	126.36	275.54	17/20

three wins, seven losses and ten ties. Under stress it is 33.58 mm, interval $[-30.62, 95.83]$ mm: ten wins and ten losses. Intervals use 10,000 paired-seed resamples. Both include zero; reliable superiority is not established. Both methods exceed 30 mm in 85% of stress cases. The new method reaches 426.96 mm error on seed 41011, worse than the baseline by 220.46 mm. No run crosses the predefined 0.70 false-confidence threshold, but stress abstention is only 1/20 versus 0/20. Low thresholded false confidence does not mean failures are recognized.

The supported outcome is an auditable observation-level design calculation, not proven localization improvement or sim-to-real transfer. The method remains explicitly experimental. The complete artifact preserves per-step actions, errors, nuisance diagnostics, configuration and code hashes in `research_results/nuisance_design_validation.json`. A compact in-app report is generated from that artifact and hash-checked, rather than manually transcribing favourable results. Subsequent tuning requires development data and a new reserved confirmatory test set.

E. Scientific Interface

The redesigned interface represents the live posterior as a three-dimensional relief whose height is probability relative to the current peak, not physical defect depth. R90 contours are computed in millimetres from panel dimensions and discrete posterior cell centres. They are not field-calibrated coverage. Source/receiver markers reflect the recommended experiment; decorative moving excitation rings are explicitly illustrative. Global pause, reduced-motion support and off-screen animation suspension keep motion subordinate to the scientific readout. The interface separates the old unitless utility, the new model-information bits, posterior containment and actual benchmark error.

XVIII. CONCLUSION

ARGUS NEO demonstrates how an NDE research prototype can be organized around the next experiment and the reliability of the measuring process, rather than only the next prediction. Its candidate contribution, TG-CDI, couples live-rival response prediction, diagnose/calibrate/verify/explore/abstain arbitration, hardest-rival geometry–waveform–fidelity design, and trust-tempered evidence in one executable physical loop. ARGUS-X adds explicit healthy and unsupported states, rejects duplicate or infeasible evidence, exposes spatial rivalry without claiming confirmed multi-defect inference, and preserves a human-controlled emergency latch and replayable record. The earlier matched-model baseline supports faster uncertainty concentration versus simple policies, while localization-error superiority remains unproven. The quick NEO studies verify mechanisms and expose poor small-sample calibration, not inspection efficacy. The defensible market wedge is inspection-orchestration software for constrained, sparse, or movable sensing, not replacement of mature robots, phased-array systems, long-range guided-wave tools, permanent SHM networks, or passive AE services. The decisive technical, commercial, and patent-support milestone is a pre-registered, specimen-held-out, blind physical campaign with a complete counterfactual bank, independent truth, calibrated coverage, predefined decision losses, and component ablations. Until then TG-CDI is a concrete, falsifiable candidate invention—not proven field superiority, certified inspection equipment, or a patentability conclusion.

ACKNOWLEDGMENT

The authors acknowledge the LMSD group at KU Leuven for releasing the LMSD 2021 plate-damage dataset under CC BY 4.0. Dataset use in ARGUS retains the published DOI and provenance.

APPENDIX A
DEFAULT CONFIGURATION

TABLE XII
IMPORTANT REPRODUCIBLE DEFAULTS

Subsystem	Parameter	Value
Panel	width × height	0.60 × 0.40 m
Material	velocity	180 m/s
Material	attenuation	1.65 m^{-1}
Material	resonance	3100 Hz
Material	damping	95 s^{-1}
Material	noise standard deviation	0.007
Material	system delay	0.8 ms
Signal	sample rate	16 kHz
Signal	record duration	0.12 s
Belief	grid; base temperature	20 × 20; 4.8
Stop	confidence; normalized entropy	0.72; 0.38
Stop	maximum experiments	12
Planner	candidate count; top hypotheses	48; 24
Planner	I, D, C, R weights	1, .35, .16, .22
Planner	coverage weight	0.22
NEO	risk; calibration; trust weights	.55; .65; .30
NEO	horizon; beam; rollout samples	1; 4; 6
NEO	calibration threshold; switch margin	.62; .05
OOD	caution; abstain thresholds	.55; .82
Safety	amplitude; frequency; duration	.75; 7 kHz; .35 s
Evidence	minimum evidence weight	.08
Easy	radii; severity; noise multiplier	.10–.15; .78–.95; .55
Medium	radii; severity; noise multiplier	.065–.11; .58–.82; 1.0
Hard	radii; severity; noise multiplier	.04–.075; .38–.64; 1.55
Reproducibility	default seed	7

APPENDIX B
INTERPRETATION GUIDE FOR DEMONSTRATIONS

An entropy decrease means probability mass has concentrated, not necessarily that the mode is correct. Confidence combines concentration and local mass and is OOD-capped, but it is not a certified probability of correctness. Ground truth must remain hidden until the controller stops. Reveal physical error using panel dimensions, not normalized distance. If entropy falls while revealed error remains high, diagnose mismatch or overconfidence rather than calling the run successful. Never describe a two-case matrix, one controlled mismatch case, or simulated calibration coverage as general performance.

A concise description for a judge is: "ARGUS is a research prototype that uses predicted responses of competing location hypotheses to select the next acoustic experiment, and can request calibration or withhold an unsupported decision. It records the action, measurement and posterior update for inspection." A defensible evidence statement is: "The current software passes 107 backend and 24 frontend tests. Its optional two-step risk controller has mixed synthetic results and is not enabled by default. Physical accuracy and patentability remain unestablished."

REFERENCES

[1] K. Chaloner and I. Verdinelli, "Bayesian experimental design: A review," *Statistical Science*, vol. 10, no. 3, pp. 273–304, 1995.

[2] D. J. C. MacKay, "Information-based objective functions for active data selection," *Neural Computation*, vol. 4, no. 4, pp. 590–604, 1992.

[3] J. L. Rose, *Ultrasonic Guided Waves in Solid Media*. Cambridge, U.K.: Cambridge University Press, 2014.

[4] E. B. Flynn and M. D. Todd, "A bayesian approach to optimal sensor placement for structural health monitoring with application to active sensing," *Mechanical Systems and Signal Processing*, vol. 24, no. 4, pp. 891–903, 2010.

[5] S. Cantero-Chinchilla, J. Chiachío, M. Chiachío, D. Chronopoulos, and A. Jones, "A robust bayesian methodology for damage localization in plate-like structures using ultrasonic guided-waves," *Mechanical Systems and Signal Processing*, vol. 122, pp. 192–205, 2019.

[6] G. L. Turin, "An introduction to matched filters," *IRE Transactions on Information Theory*, vol. 6, no. 3, pp. 311–329, 1960.

[7] N. Javaheri, R. H. M. Schoenmakers, M. Peemen, H. Kohr, H. I. S. Vanrompay, and M. Diephuis, "Digital twin calibration," European Patent Application EP 4 592 907 A1, 2025. [Online]. Available: https://data.epo.org/publication-server/rest/v1.2/publication-dates/2025-07-30/patents/EP4592907NWA1/document.pdf

[8] J. Moll, J. Kathol, C.-P. Fritzen, M. Moix-Bonet, M. Rennoch, M. Koerdt, A. S. Herrmann, M. G. R. Sause, and M. Bach, "Open guided waves: Online platform for ultrasonic guided wave measurements," *Structural Health Monitoring*, vol. 18, no. 5–6, pp. 1903–1914, 2019.

[9] N. Dwek, D. Janssens, V. Dimopoulos, and E. Deckers, "LMSD 2021 dataset for damage identification in plates," 2024. [Online]. Available: https://zenodo.org/records/11033677

[10] V. Giurgiutiu, J. Bao, and A. N. Zagrai, "Structural health monitoring system utilizing guided lamb waves embedded ultrasonic structural radar," European Patent Application EP 1 514 217 A2, 2005. [Online]. Available: https://patents.google.com/patent/EP1514217A2/en

[11] J. S. Hall and J. E. Michaels, "Method and system for multi-path active defect detection, localization and characterization with ultrasonic guided waves," U.S. Patent 10,126,274 B2, 2018. [Online]. Available: https://ntrs.nasa.gov/citations/20190000745

[12] J. Dunne, J.-B. Ihn, and L. Pado, "Structural health monitoring apparatus and associated system and method," U.S. Patent Application US 2025/0377339 A1, 2025. [Online]. Available: https://patents.google.com/patent/US20250377339A1/en

[13] National Institute of Standards and Technology, "Machine learning driven self-correcting autonomous metrology systems," 2025, accessed: Aug. 30, 2026. [Online]. Available: https://www.nist.gov/programs-projects/machine-learning-driven-self-correcting-autonomous-metrology-systems-sams

[14] Gecko Robotics, "Cantilever: Ai and robotics for the built world," 2026, accessed: Aug. 30, 2026. [Online]. Available: https://www.geckorobotics.com/

[15] Evident Scientific, "Omniscan x3 phased array and total focusing method flaw detector," 2026, accessed: Aug. 30, 2026. [Online]. Available: https://ims.evidentscientific.com/en/products/flaw-detectors/omniscan-x3

[16] Eddyfi Technologies, "Sonyks: The next generation of guided wave testing," 2021, accessed: Aug. 30, 2026. [Online]. Available: https://www.eddyfi.com/en/news/eddyfi-technologies-proudly-introduces-sonyks-the-next-generation-of-guided-wave-testing

[17] Acellent Technologies, "Smart layer structural health monitoring platform," 2026, accessed: Aug. 30, 2026. [Online]. Available: https://www.acellent.com/support

[18] MISTRAS Group, "Aescout acoustic emission monitoring solution," 2026, accessed: Aug. 30, 2026. [Online]. Available: https://www.mistrasgroup.com/resources/newsroom/2026/07/15/mistras-launches-aescout-help-industrial-operators-detect-active/

[19] F. J. Harris, "On the use of windows for harmonic analysis with the discrete fourier transform," *Proceedings of the IEEE*, vol. 66, no. 1, pp. 51–83, 1978.

[20] P. D. Welch, "The use of fast fourier transform for the estimation of power spectra: A method based on time averaging over short, modified periodograms," *IEEE Transactions on Audio and Electroacoustics*, vol. 15, no. 2, pp. 70–73, 1967.

[21] A. V. Oppenheim, R. W. Schafer, and J. R. Buck, *Discrete-Time Signal Processing*, 2nd ed. Upper Saddle River, NJ, USA: Prentice Hall, 1999.

[22] A. Paszke, S. Gross, F. Massa, A. Lerer, J. Bradbury, G. Chanan, T. Killeen, Z. Lin, N. Gimelshein, L. Antiga, A. Desmaison, A. Koepf, E. Yang, Z. DeVito, M. Raison, A. Tejani, S. Chilamkurthy, B. Steiner, L. Fang, J. Bai, and S. Chintala, "Pytorch: An imperative style, high-performance deep learning library," in *Advances in Neural Information Processing Systems*, vol. 32, 2019, pp. 8024–8035.

[23] R. Feldmann, F. Meding, and T. Melz, "Data for the paper: Audio signal-based defect detection for wind turbine rotor blades using an autoencoder," 2026, dataset, CC BY 4.0. [Online]. Available:

https://tudatalib.ulb.tu-darmstadt.de/items/33756af4-eb6d-4156-8708-a41cbed33e7b

[24] F. Zonzini, G. Donati, L. D. Marchi, and N. Testoni, "Acoustic emission dataset for impact localization: Numerical and experimental case studies," 2024, dataset, CC BY 4.0. [Online]. Available: https://zenodo.org/records/10875042

[25] R. Hartley and A. Zisserman, *Multiple View Geometry in Computer Vision*, 2nd ed. Cambridge, U.K.: Cambridge University Press, 2004.

[26] C. R. Harris, K. J. Millman, S. J. van der Walt, R. Gommers, P. Virtanen, D. Cournapeau, E. Wieser, J. Taylor, S. Berg, N. J. Smith, R. Kern, M. Picus, S. Hoyer, M. H. van Kerkwijk, M. Brett, A. Haldane, J. F. del Río, M. Wiebe, P. Peterson, P. Gérard-Marchant, K. Sheppard, T. Reddy, W. Weckesser, H. Abbasi, C. Gohlke, and T. E. Oliphant, "Array programming with NumPy," *Nature*, vol. 585, pp. 357–362, 2020.

[27] P. Virtanen, R. Gommers, T. E. Oliphant, M. Haberland, T. Reddy, D. Cournapeau, E. Burovski, P. Peterson, W. Weckesser, J. Bright, S. J. van der Walt, M. Brett, J. Wilson, K. J. Millman, N. Mayorov, A. R. J. Nelson, E. Jones, R. Kern, E. Larson, C. J. Carey, İ. Polat, Y. Feng, E. W. Moore, J. VanderPlas, D. Laxalde, J. Perktold, R. Cimrman, I. Henriksen, E. A. Quintero, C. R. Harris, A. M. Archibald, A. H. Ribeiro, F. Pedregosa, P. van Mulbregt, and SciPy 1.0 Contributors, "SciPy 1.0: Fundamental algorithms for scientific computing in python," *Nature Methods*, vol. 17, pp. 261–272, 2020.

[28] A. Bartuska, L. Espath, and R. Tempone, "Small-noise approximation for Bayesian optimal experimental design with nuisance uncertainty," *Computer Methods in Applied Mechanics and Engineering*, vol. 399, p. 115320, 2022.

[29] J. Go and T. Isaac, "Robust expected information gain for optimal Bayesian experimental design using ambiguity sets," in *Uncertainty in Artificial Intelligence*, 2022. [Online]. Available: https://arxiv.org/abs/2205.09914

[30] S. Raorane, T. Ercan, C. Papadimitriou, P. Packo, and T. Uhl, "Bayesian optimal sensor placement for acoustic emission source localization with clusters of sensors in isotropic plates," *Mechanical Systems and Signal Processing*, vol. 214, p. 111342, 2024.