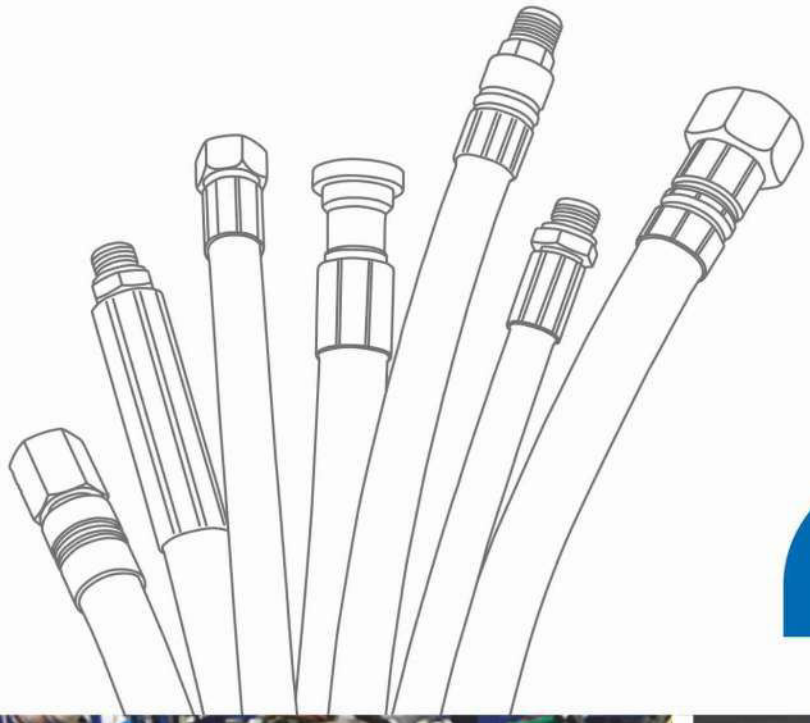
VEXTRA®



# HYDRAULIC HOSE FITTINGS & ADAPTERS









**VAISHNO RUBBER INDUSTRIES PVT. LTD.**

# At a Glance










# A Profile

M/s VAISHNO RUBBER INDUSTIRES PVT. LTD. (herein after referred as Company) was incorporated on 14th November 2014 by Mr. Satvir Singh and Dr. (Mrs.) Roopam Singh with a view to manufacture the wire/textile braided hoses and hose assemblies (LPG, Industrial hoses & Hydraulic hoses) conforming to DIN, EN, SAE, IS & BS specifications. Vaishno Rubber Industries Pvt. Ltd. is an ISO 9001-2015 certified company for quality management system.

Vaishno Rubber is committed to the design, manufacture and distribution of Reinforced rubber hoses. We have started state-of-the-art production facility and infrastructure to manufacture hoses and the production unit based in Moradabad (U.P.) is spread on a sprawling land area of approximately 5 acres. At this location, we commenced manufacture of long length hoses on Flexible Nylon Mandrels to increase our capacity and consistent quality. With all latest technology equipment in place, we would like to assure you that you would get a hose that is comparable with the best and far superior to any other hose being manufactured in this part of the country.

We also have fully equipped Laboratory (R&D), which has most of the required testing equipment including Rheometer, Cold Chamber (up to -50°C), and Ozone Chamber etc. to test the quality of each batch of Rubber manufactured by us.





## SAE 100 R1 AT Hi-Impulse / DIN 20002 Part - 3 / EN 853-1SN (Single Wire Braided)

**EN 853 1SN / SAE 100 R1**

Tube:
**Synthetic rubber, resistant to hydraulic fluids**
Reinforcement:
**One braid of high tensile steel wire**
Cover:
**Oil, weather & abrasion resistant synthetic rubber**
Temperature Range (Medium):
**-40°C to +100°C (MAX 120°C Intermittent)**

| Product Code VR | Dash | DN | Hose ID Inch | Hose OD (mm) | Max. Working Pressure | | Min. Burst Pressure | | Min. Bend Radius (mm) |
|---|---|---|---|---|---|---|---|---|---|
| | | | | | Bar | PSI | Bar | PSI | |
| 01-4 | 4 | 6 | 1/4" | 13.4 | 225 | 3263 | 900 | 13050 | 100 |
| 01-5 | 5 | 8 | 5/16" | 15.0 | 215 | 3118 | 850 | 12325 | 115 |
| 01-6 | 6 | 10 | 3/8" | 17.4 | 180 | 2610 | 720 | 10440 | 130 |
| 01-8 | 8 | 12 | 1/2" | 20.5 | 160 | 2320 | 640 | 9280 | 180 |
| 01-10 | 10 | 16 | 5/8" | 23.6 | 130 | 1885 | 520 | 7540 | 200 |
| 01-12 | 12 | 19 | 3/4" | 27.7 | 105 | 1523 | 420 | 6090 | 240 |
| 01-16 | 16 | 25 | 1" | 35.4 | 88 | 1276 | 350 | 5075 | 300 |
| 01-20 | 20 | 31 | 1 1/4" | 43.7 | 63 | 914 | 250 | 3625 | 420 |
| 01-24 | 24 | 38 | 1 1/2" | 50.0 | 50 | 725 | 200 | 2900 | 500 |
| 01-32 | 32 | 51 | 2" | 63.7 | 40 | 580 | 160 | 2320 | 630 |



## SAE 100 R2 AT Hi Impulse / DIN 20002 Part -4 / En853 - 2SN (Double Wire Braided)

**EN 853 2SN / SAE 100 R2**

Tube:
**Synthetic rubber, resistant to hydraulic fluids**
Reinforcement:
**Two braid of high tensile steel wire**
Cover:
**Oil, weather & abrasion resistant synthetic rubber**
Temperature Range (Medium):
**-40°C to +100°C (MAX 120°C Intermittent)**

| Product Code VR | Dash | DN | Hose ID Inch | Hose OD (mm) | Max. Working Pressure | | Min. Burst Pressure | | Min. Bend Radius (mm) |
|---|---|---|---|---|---|---|---|---|---|
| | | | | | Bar | PSI | Bar | PSI | |
| 02-4 | 4 | 6 | 1/4" | 14.9 | 400 | 5800 | 1600 | 23200 | 100 |
| 02-5 | 5 | 8 | 5/16" | 16.6 | 350 | 5075 | 1400 | 20300 | 115 |
| 02-6 | 6 | 10 | 3/8" | 18.9 | 330 | 4785 | 1320 | 19140 | 130 |
| 02-8 | 8 | 12 | 1/2" | 22.1 | 275 | 3988 | 1100 | 15950 | 180 |
| 02-10 | 10 | 16 | 5/8" | 25.4 | 250 | 3625 | 1000 | 14500 | 200 |
| 02-12 | 12 | 19 | 3/4" | 29.3 | 215 | 3118 | 850 | 12325 | 240 |
| 02-16 | 16 | 25 | 1" | 37.6 | 165 | 2393 | 650 | 9425 | 300 |
| 02-20 | 20 | 31 | 1 1/4" | 47.5 | 125 | 1813 | 500 | 7250 | 420 |
| 02-24 | 24 | 38 | 1 1/2" | 54.5 | 90 | 1305 | 360 | 5220 | 500 |
| 02-32 | 32 | 51 | 2" | 67.0 | 80 | 1160 | 320 | 4640 | 630 |



## Extra High Pressure Hose

**VR PROPRIETARY- SH33**

Tube:
**Synthetic rubber, resistant to hydraulic fluids**
Reinforcement:
**Three braid of high tensile steel wire**
Cover:
**Oil, weather & abrasion resistant synthetic rubber**
Temperature Range (Medium):
**-40°C to +100°C (MAX 120°C Intermittent)**

| Product Code VR | Dash | DN | Hose ID Inch | Hose OD (mm) | Max. Working Pressure | | Min. Burst Pressure | | Min. Bend Radius (mm) |
|---|---|---|---|---|---|---|---|---|---|
| | | | | | Bar | PSI | Bar | PSI | |
| VR 33-8 | 8 | 12 | 1/2" | 24.8 | 470 | 6815 | 1880 | 27260 | 160 |
| VR 33-10 | 10 | 16 | 5/8" | 27.8 | 400 | 5800 | 1600 | 23200 | 216 |
| VR 33-12 | 12 | 19 | 3/4" | 32.5 | 355 | 5148 | 1420 | 20590 | 260 |
| VR 33-16 | 16 | 25 | 1" | 40.0 | 310 | 4495 | 1240 | 17980 | 310 |
| VR 33-20 | 20 | 31 | 1 1/4" | 46.5 | 240 | 3480 | 960 | 13920 | 410 |

## Jack Hose 725 BAR

Tube:
**Synthetic rubber, resistant to hydraulic fluids**
Reinforcement:
**Two braid of high tensile steel wire**
Cover:
**Oil, weather & abrasion resistant synthetic rubber**
Temperature Range (Medium):
**-40°C to +50°C**



## JACK HOSE 725 BAR WP

| Product Code VR | Dash | DN | Hose ID Inch | Hose OD (mm) | Max. Working Pressure | | Min. Burst Pressure | | Min. Bend Radius (mm) |
|---|---|---|---|---|---|---|---|---|---|
| | | | | | Bar | PSI | Bar | PSI | |
| Jack-4 | 4 | 6 | 1/4" | 14.2 | 725 | 10513 | 1450 | 21025 | 100 |
| Jack-6 | 6 | 10 | 3/8" | 17.5 | 725 | 10513 | 1450 | 21025 | 130 |

**Highlights : Ideal for Hydraulic Jacking System.**



## Loader Hose

## Super Loader SERIES

Tube:
**Synthetic rubber, resistant to hydraulic fluids**
Reinforcement:
**Two braid of high tensile steel wire**
Cover:
**Oil, weather & abrasion resistant synthetic rubber**
Temperature Range (Medium):
**-40°C to +100°C**

| Product Code VR | Dash | DN | Hose ID Inch | Hose OD (mm) | Max. Working Pressure | | Min. Burst Pressure | | Min. Bend Radius (mm) |
|---|---|---|---|---|---|---|---|---|---|
| | | | | | Bar | PSI | Bar | PSI | |
| Loader-8 | 8 | 12 | 1/2" | 22.5 | 345 | 5000 | 1380 | 20010 | 180 |
| Loader-12 | 12 | 19 | 3/4" | 29.5 | 260 | 3770 | 1040 | 15080 | 240 |
| Loader-16 | 16 | 25 | 1" | 38.0 | 220 | 3200 | 880 | 12760 | 300 |

**Highlights : Suitable for extra high pressure Loader application.**



## SAE 100 R3 (Double Textile Braided)

## SAE 100 R3

Tube:
**Synthetic rubber, resistant to hydraulic fluids**
Reinforcement:
**Two Textile braided**
Cover:
**Oil, weather & abrasion resistant synthetic rubber**
Temperature Range (Medium):
**-40°C to +100°C**

| Product Code VR | Dash | DN | Hose ID Inch | Hose OD (mm) | Max. Working Pressure | | Min. Burst Pressure | | Min. Bend Radius (mm) |
|---|---|---|---|---|---|---|---|---|---|
| | | | | | Bar | PSI | Bar | PSI | |
| 03-4 | 4 | 6 | 1/4" | 14.8 | 87 | 1262 | 348 | 5046 | 75 |
| 03-5 | 5 | 8 | 5/16" | 17.3 | 84 | 1218 | 336 | 4872 | 100 |
| 03-6 | 6 | 10 | 3/8" | 19.0 | 78 | 1131 | 312 | 4524 | 100 |
| 03-8 | 8 | 12 | 1/2" | 23.8 | 70 | 1015 | 280 | 4060 | 125 |
| 03-10 | 10 | 16 | 5/8" | 26.9 | 61 | 885 | 244 | 3538 | 140 |
| 03-12 | 12 | 19 | 3/4" | 31.5 | 52 | 754 | 208 | 3016 | 150 |
| 03-16 | 16 | 25 | 1" | 38.0 | 39 | 566 | 156 | 2262 | 205 |

**Highlights : Suitable for use with petroleum & water based hydraulic fluids.**



## SAE 100 R6 - (Single Textile Braided) (* Not Covered under SAE)

## SAE 100 R6

Tube:
**Synthetic rubber, resistant to hydraulic fluids**
Reinforcement:
**Single Textile braided**
Cover:
**Oil, weather & abrasion resistant synthetic rubber**
Temperature Range (Medium):
**-40°C to +100°C**

| Product Code VR | Dash | DN | Hose ID Inch | Hose OD (mm) | Max. Working Pressure | | Min. Burst Pressure | | Min. Bend Radius (mm) |
|---|---|---|---|---|---|---|---|---|---|
| | | | | | Bar | PSI | Bar | PSI | |
| 06-4 | 4 | 6 | 1/4" | 13.0 | 28 | 406 | 112 | 1624 | 65 |
| 06-5 | 5 | 8 | 5/16" | 14.2 | 28 | 406 | 112 | 1624 | 75 |
| 06-6 | 6 | 10 | 3/8" | 15.7 | 28 | 406 | 112 | 1624 | 75 |
| 06-8 | 8 | 12 | 1/2" | 19.7 | 28 | 406 | 112 | 1624 | 100 |
| 06-10 | 10 | 16 | 5/8" | 23.2 | 24 | 348 | 96 | 1392 | 125 |
| 06-12 | 12 | 19 | 3/4" | 26.0 | 21 | 305 | 84 | 1218 | 150 |
| 06-16* | 16 | 25 | 1" | 33.1 | 15 | 218 | 60 | 870 | 177 |



## SAE 100 R5 (Textile Braided Separated by One Wire Braided)

**SAE 100 R5**

Tube:
Synthetic rubber, resistant to hydraulic fluids
Reinforcement:
One braid of high tensile steel wire & textile braided.
Cover:
Oil & mildew resistant rubber impregnated black cotton braid
Temperature Range (Medium):
-40°C to +100°C

| Product Code VR | Dash | DN | Hose ID Inch | Hose OD (mm) | Max. Working Pressure | | Min. Burst Pressure | | Min. Bend Radius (mm) |
|---|---|---|---|---|---|---|---|---|---|
| | | | | | Bar | PSI | Bar | PSI | |
| 05-4 | 4 | 5 | 3/16" | 13.4 | 210 | 3045 | 840 | 12180 | 75 |
| 05-5 | 5 | 6 | 1/4" | 14.8 | 210 | 3045 | 840 | 12180 | 85 |
| 05-6 | 6 | 8 | 5/16" | 17.2 | 157 | 2277 | 628 | 9108 | 100 |
| 05-8 | 8 | 10 | 13/32" | 19.3 | 140 | 2030 | 560 | 8120 | 115 |
| 05-10 | 10 | 12 | 1/2" | 23.3 | 122 | 1769 | 488 | 7076 | 140 |
| 05-12 | 12 | 16 | 5/8" | 27.4 | 105 | 1523 | 420 | 6090 | 165 |
| 05-16 | 16 | 22 | 7/8" | 31.3 | 56 | 812 | 224 | 3248 | 185 |
| 05-20 | 20 | 29 | 1-1/8" | 38.4 | 43 | 625 | 172 | 2494 | 230 |
| 05-24 | 24 | 35 | 1-3/8" | 44.9 | 35 | 500 | 140 | 2030 | 265 |
| 05-32 | 32 | 46 | 1-13/16" | 56.2 | 24 | 350 | 96 | 1392 | 335 |

Highlights : Suitable for use with Petroleum & water based hydraulic fluids.



## SAE 100 R5R (Textile Inner Braid & Wire Reinforcement and rubber outer cover)

**SAE 100 R5R**

Tube:
Synthetic rubber, resistant to hydraulic fluids
Reinforcement:
One braid of high tensile steel wire & textile braided.
Cover:
Oil, weather & abrasion resistant synthetic rubber
Temperature Range (Medium):
-40°C to +100°C

| Product Code VR | Dash | DN | Hose ID Inch | Hose OD (mm) | Max. Working Pressure | | Min. Burst Pressure | | Min. Bend Radius (mm) |
|---|---|---|---|---|---|---|---|---|---|
| | | | | | Bar | PSI | Bar | PSI | |
| 5R - 4 | 4 | 5 | 3/16" | 13.2 | 210 | 3045 | 840 | 12180 | 75 |
| 5R - 5 | 5 | 6 | 1/4" | 14.7 | 210 | 3045 | 840 | 12180 | 85 |
| 5R - 6 | 6 | 8 | 5/16" | 17 | 157 | 2277 | 628 | 9108 | 100 |
| 5R - 8 | 8 | 10 | 13/32" | 19.3 | 140 | 2030 | 560 | 8120 | 115 |
| 5R - 10 | 10 | 12 | 1/2" | 23.3 | 122 | 1769 | 488 | 7076 | 140 |
| 5R - 12 | 12 | 16 | 5/8" | 27.2 | 105 | 1523 | 420 | 6090 | 165 |
| 5R - 16 | 16 | 22 | 7/8" | 31.2 | 56 | 812 | 224 | 3248 | 185 |
| 5R-20 | 20 | 29 | 1-1/8" | 38.1 | 43 | 625 | 172 | 2494 | 230 |
| 5R-24 | 24 | 35 | 1-3/8" | 44.7 | 35 | 500 | 140 | 2030 | 265 |
| 5R-32 | 32 | 46 | 1-13/16" | 56.4 | 24 | 350 | 96 | 1392 | 335 |

Highlights : Suitable for use with petroleum & water based hydraulic fluids.

# INDUSTRIAL HOSE



## STEAM HOSE TYPE-2 (Single Wire Braided) WP 10 BAR - 51 series

**IS : 10655 TYPE - 2**

Tube:
Synthetic rubber, saturated steam & heat resistant
Reinforcement:
One high tensile steel wire braided
Cover:
Steam & heat resistant synthetic rubber
Temperature Range (Medium):
-40°C to +195°C

| Product Code VR | Dash | DN | Hose ID Inch | Hose OD (mm) | Max. Working Pressure | | Min. Burst Pressure | | Min. Bend Radius (mm) |
|---|---|---|---|---|---|---|---|---|---|
| | | | | | Bar | PSI | Bar | PSI | |
| 51 - 6 | 6 | 10 | 3/8" | 18.9 | 10 | 145 | 100 | 1450 | 130 |
| 51 - 8 | 8 | 12 | 1/2" | 22.0 | 10 | 145 | 100 | 1450 | 180 |
| 51 - 10 | 10 | 16 | 5/8" | 25.4 | 10 | 145 | 100 | 1450 | 200 |
| 51 - 12 | 12 | 19 | 3/4" | 28.7 | 10 | 145 | 100 | 1450 | 240 |
| 51 - 16 | 16 | 25 | 1" | 35.9 | 10 | 145 | 100 | 1450 | 300 |
| 51 - 20 | 20 | 31 | 1 1/4" | 43.5 | 10 | 145 | 100 | 1450 | 400 |
| 51 - 24 | 24 | 38 | 1 1/2" | 50.5 | 10 | 145 | 100 | 1450 | 500 |
| 51 - 32 | 32 | 51 | 2" | 63.5 | 10 | 145 | 100 | 1450 | 650 |

Highlights: Suitable for use with saturated steam application.



## STEAM HOSE TYPE-3 (Double Wire Braided) WP 17 BAR - 52 Series

### IS : 10655 TYPE - 3

Tube:
**Synthetic rubber, saturated steam & heat resistant**
Reinforcement:
**Two high tensile steel wire braided**
Cover:
**Steam & heat resistant synthetic rubber**
Temperature Range (Medium):
**-40°C to +210°C**

| Product Code VR | Dash | DN | Hose ID Inch | Hose OD (mm) | Max. Working Pressure | | Min. Burst Pressure | | Min. Bend Radius (mm) |
|---|---|---|---|---|---|---|---|---|---|
| | | | | | Bar | PSI | Bar | PSI | |
| 52 - 6 | 6 | 10 | 3/8" | 21.0 | 17 | 247 | 160 | 2320 | 130 |
| 52 - 8 | 8 | 12 | 1/2" | 24.0 | 17 | 247 | 160 | 2320 | 180 |
| 52 - 10 | 10 | 16 | 5/8" | 27.6 | 17 | 247 | 160 | 2320 | 200 |
| 52 - 12 | 12 | 19 | 3/4" | 30.9 | 17 | 247 | 160 | 2320 | 240 |
| 52 - 16 | 16 | 25 | 1" | 38.6 | 17 | 247 | 160 | 2320 | 300 |
| 52 - 20 | 20 | 31 | 1 1/4" | 46.0 | 17 | 247 | 160 | 2320 | 400 |
| 52 - 24 | 24 | 38 | 1 1/2" | 54.3 | 17 | 247 | 160 | 2320 | 500 |
| 52 - 32 | 32 | 51 | 2" | 67.5 | 17 | 247 | 160 | 2320 | 650 |

**Highlights: Suitable for use with saturated steam application.**



## SUPER DYNAMIC ROCK DRILL HOSE (IS 446 TYPE-3) WIRE BRAIDED - WP 500 PSI

### IS 446 TYPE-3, WIRE BRAIDED

Tube:
**Synthetic rubber**
Reinforcement:
**One high tensile steel wire braided**
Cover:
**Oil, weather & abrasion resistant synthetic rubber**
Temperature Range (Medium):
**-40°C to +70°C**

| Product Code VR | Dash | DN | Hose ID Inch | Hose OD (mm) | Max. Working Pressure | | Min. Burst Pressure | | Min. Bend Radius (mm) |
|---|---|---|---|---|---|---|---|---|---|
| | | | | | Bar | PSI | Bar | PSI | |
| RDH - 8 (1W) | 8 | 12 | 1/2" | 21.2 | 35.0 | 500 | 138 | 2000 | 180 |
| RDH - 10 (1W) | 10 | 16 | 5/8" | 24 .0 | 35.0 | 500 | 138 | 2000 | 200 |
| RDH - 12 (1W) | 12 | 19 | 3/4" | 27.7 | 35.0 | 500 | 138 | 2000 | 240 |
| RDH - 16 (1W) | 16 | 25 | 1" | 35.7 | 35.0 | 500 | 138 | 2000 | 300 |
| RDH - 20 (1W) | 20 | 31 | 1 1/4" | 43.0 | 35.0 | 500 | 138 | 2000 | 420 |
| RDH - 24 (1W) | 24 | 38 | 1 1/2" | 50.5 | 35.0 | 500 | 138 | 2000 | 500 |
| RDH - 32 (1W) | 32 | 51 | 2" | 63.5 | 35.0 | 500 | 138 | 2000 | 630 |

**Highlights: Suitable for heavy duty high pressure pneumatic application (with oil resistance)**



## SUPER DYNAMIC ROCK DRILL HOSE (IS 446 TYPE-3) YARN BRAIDED

### IS 446 TYPE-3, YARN BRAIDED

Tube:
**Synthetic rubber**
Reinforcement:
**One Yarn braided**
Cover:
**Oil, weather & abrasion resistant synthetic rubber**
Temperature Range (Medium):
**-40°C to +70°C**

| Product Code VR | Dash | DN | Hose ID Inch | Hose OD (mm) | Max. Working Pressure | | Min. Burst Pressure | | Min. Bend Radius (mm) |
|---|---|---|---|---|---|---|---|---|---|
| | | | | | Bar | PSI | Bar | PSI | |
| RDH - 8 (1Y) | 8 | 12 | 1/2" | 21.2 | 21 | 300 | 83 | 1200 | - |
| RDH - 12 (1Y) | 12 | 19 | 3/4" | 27.7 | 21 | 300 | 83 | 1200 | - |
| RDH - 16 (1Y) | 16 | 25 | 1" | 36.0 | 21 | 300 | 83 | 1200 | - |
| RDH - 20 (1Y) | 20 | 31 | 11/4" | 43.0 | 14 | 200 | 55 | 800 | - |
| RDH - 24 (1Y) | 24 | 38 | 11/2" | 50.5 | 14 | 200 | 55 | 800 | - |
| RDH - 32 (1Y) | 32 | 51 | 2" | 63.5 | 14 | 200 | 55 | 800 | - |

**Highlights: Suitable for high pressure pneumatic application (with oil resistance)**

# LPG HOSES



## LPG HOSE (BS EN 1762 Type-D) Single wire Braided

### BS EN 1762 TYPE-D

Tube:
**Synthetic rubber, resistant to LPG**
Reinforcement:
**One high tensile steel wire braided**
Cover:
**Oil, weather & abrasion resistant synthetic rubber**
Temperature Range (Medium):
**-40°C to +70°C**

| Product Code VR | Dash | DN | Hose ID Inch | Hose OD (mm) | Max. Working Pressure | | Min. Burst Pressure | | Min. Bend Radius (mm) |
|---|---|---|---|---|---|---|---|---|---|
| | | | | | Bar | PSI | Bar | PSI | |
| 1762D - 8 | 8 | 12 | 1/2" | 22.7 | 25 | 363 | 100 | 1450 | 100 |
| 1762D - 10 | 10 | 16 | 5/8" | 25.4 | 25 | 363 | 100 | 1450 | 125 |
| 1762D - 12 | 12 | 19 | 3/4" | 30.5 | 25 | 363 | 100 | 1450 | 160 |
| 1762D - 16 | 16 | 25 | 1" | 37.5 | 25 | 363 | 100 | 1450 | 200 |



## LPG Hose (IS 9573 : Type-II) Single Wire Braided

### IS 9573 : TYPE-II

Tube:
**Synthetic rubber, resistant to LPG**
Reinforcement:
**One high tensile steel wire braided**
Cover:
**Oil & weather resistant synthetic rubber orange colour**
Temperature Range (Medium):
**-40°C to +70°C**

| Product Code VR | Dash | DN | Hose ID Inch | Hose OD (mm) | Max. Working Pressure | | Min. Burst Pressure | | Min. Bend Radius (mm) |
|---|---|---|---|---|---|---|---|---|---|
| | | | | | Bar | PSI | Bar | PSI | |
| 95734 - 5 | 5 | 8 | 5/16" | 15.0 | 10 | 145 | 50 | 725 | 95 |
| 95734 - 6 | 6 | 10 | 3/8" | 18.0 | 10 | 145 | 50 | 725 | 120 |
| 95734 - 8 | 8 | 12 | 1/2" | 20.2 | 10 | 145 | 50 | 725 | 150 |

# AUTOMOTIVE HOSES



## Governor Hose

### GOVERNOR HOSE

Tube:
**Synthetic rubber, resistant to oil & petroleum based fuel**
Reinforcement:
**One high tensile steel wire braided**
Cover:
**Oil, weather & abrasion resistant synthetic rubber**
Temperature Range (Medium):
**-40°C to +55°C**

| Product Code VR | Dash | DN | Hose ID Inch | Hose OD (mm) | Max. Working Pressure | | Min. Burst Pressure | | Min. Bend Radius (mm) |
|---|---|---|---|---|---|---|---|---|---|
| | | | | | Bar | PSI | Bar | PSI | |
| GH - 4 | 4 | 6 | 1/4" | 12.8 | 7 | 100 | 414 | 6000 | 100 |



## TRACTOR TROLLEY HOSE

### TRACTOR TROLLEY HOSE

Tube:
**Synthetic rubber, resistant to hydraulic fluids.**
Reinforcement:
**Two braid of high tensile steel wire**
Cover:
**Oil, weather & abrasion resistant synthetic rubber**
Temperature Range (Medium):
**-40°C to +70°C**

| Product Code VR | Dash | DN | Hose ID Inch | Hose OD (mm) | Max. Working Pressure | | Min. Burst Pressure | | Min. Bend Radius (mm) |
|---|---|---|---|---|---|---|---|---|---|
| | | | | | Bar | PSI | Bar | PSI | |
| TT - 6 (2w) | 6 | 10 | 3/8" | 18.5 | 207 | 3000 | 690 | 10000 | 130 |
| TT - 8 (2w) | 8 | 12 | 1/2" | 21.7 | 172 | 2500 | 552 | 8000 | 180 |



## CNG HOSE SAE J 30 R6

### CNG HOSE SAE J 30 R6

Tube:
**Fuel resistant synthetic rubber**
Reinforcement:
**One yarn braided**
Cover:
**Oil & highly weather resistant synthetic rubber**
Temperature Range (Medium):
**-40°C to +70°C**

| Product Code VR | Dash | DN | Hose ID Inch | Hose OD (mm) | Max. Working Pressure | | Min. Burst Pressure | | Min. Bend Radius (mm) |
|---|---|---|---|---|---|---|---|---|---|
| | | | | | Bar | PSI | Bar | PSI | |
| CNG-4 | 4 | 6 | 1/4" | 12.7 | 21 | 305 | 48 | 700 | 65 |
| CNG-5 | 5 | 8 | 5/16" | 14.3 | 21 | 305 | 48 | 700 | 75 |
| CNG-6 | 6 | 10 | 3/8" | 15.8 | 21 | 305 | 48 | 700 | 75 |
| CNG-8 | 8 | 12 | 1/2" | 19.8 | 21 | 305 | 48 | 700 | 100 |
| CNG-10 | 10 | 16 | 5/8" | 23.8 | 21 | 305 | 48 | 700 | 125 |
| CNG-12 | 12 | 19 | 3/4" | 28.6 | 21 | 305 | 48 | 700 | 150 |
| CNG-16 | 16 | 25 | 1" | 35 | 21 | 305 | 48 | 700 | 177 |



## AIR CONDITIONING SUCTION HOSE (SAE J 2064 TYPE-B)

### SAE J 2064 TYPE-B

Tube:
**Low permeable synthetic rubber**
Reinforcement:
**One wire braided**
Cover:
**Weather & heat resistant synthetic rubber**
Temperature Range (Medium):
**-30°C to +125°C**

| Product Code SHIPL | Dash | DN | Hose ID Inch | Hose OD (mm) | Max. Working Pressure | | Min. Burst Pressure | | Min. Bend Radius (mm) |
|---|---|---|---|---|---|---|---|---|---|
| | | | | | Bar | PSI | Bar | PSI | |
| AC Suction - 5 | 5 | 8 | 5/16" | 17.0 | 34.5 | 500 | 138 | 2000 | 115 |
| AC Suction - 6.5 | 6.5 | 10 | 13/32" | 19.5 | 34.5 | 500 | 138 | 2000 | 130 |
| AC Suction - 8 | 8 | 12 | 1/2" | 22.5 | 34.5 | 500 | 138 | 2000 | 140 |
| AC Suction - 10 | 10 | 16 | 5/8" | 25.5 | 34.5 | 500 | 138 | 2000 | 165 |
| AC Suction - 12 | 12 | 19 | 3/4" | 28.7 | 34.5 | 500 | 138 | 2000 | 180 |
| AC Suction - 14 | 14 | 22 | 7/8" | 31.4 | 34.5 | 500 | 138 | 2000 | 190 |
| AC Suction - 18 | 18 | 29 | 1-1/8" | 38.5 | 34.5 | 500 | 138 | 2000 | 230 |



## LPG Hose (IS 9573: Type-I) Single Wire Braided

### ARAI Approved

**Tube:**
Synthetic rubber, resistant to LPG
**Reinforcement:**
One high tensile steel wire braided
**Cover:**
Oil, weather & abrasion resistant synthetic rubber
**Temperature Range (Medium):**
-40°C to +70°C

| Product Code VR | Dash | DN | Hose ID Inch | Hose OD (mm) | Max. Working Pressure | | Min. Burst Pressure | | Min. Bend Radius (mm) |
|---|---|---|---|---|---|---|---|---|---|
| | | | | | Bar | PSI | Bar | PSI | |
| 9573-4 | 4 | 6 | 1/4" | 13.2 | 25 | 363 | 125 | 1813 | 70 |

# FLOW CAPACITIES PRESSURE DROP

## Flow Capacities of hose assemblies at suggested flow velocities

The chart below is designed and provided as an aid in the determination of the correct hose size.

### Example:

At 13 U.S. gallons per minute, what is proper hose size within the suggested velocity range for pressure lines?

Solution: Locate 13 U.S. gallons per minute in the left hand column and 10 feet per second in the right hand column (the center of the suggested velocity range for pressure lines).

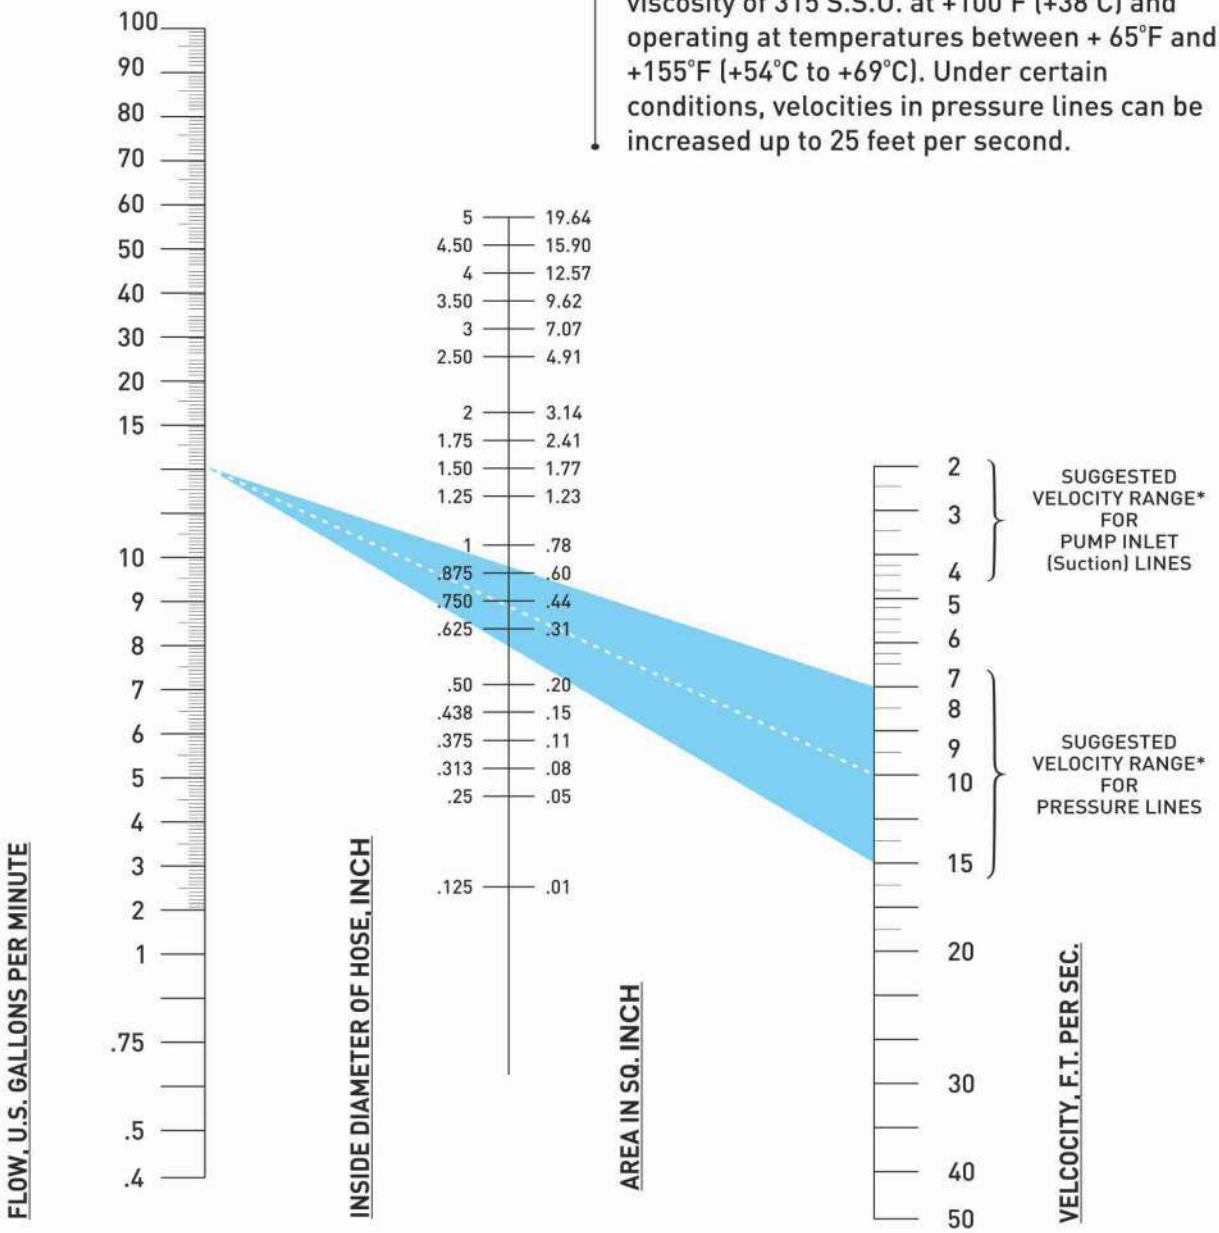
Lay a straight edge across the two points. The inside diameter is shown in the center column nearest the straight edge .

For suction hose, follow the same procedure except use suggested velocity range for pump inlet lines in the right hand column..

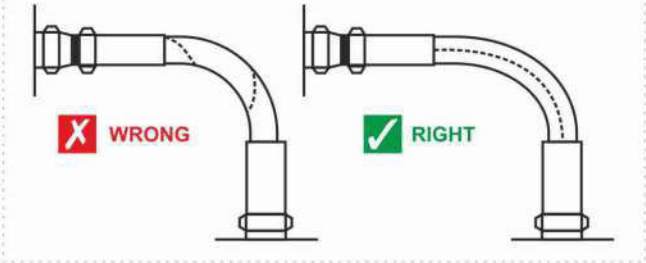
### Based on Formula

$$\text{Area (SQ. In. )} = \frac{\text{G.P.M. x 0.3208}}{\text{Velocity (Ft/Sec.)}}$$

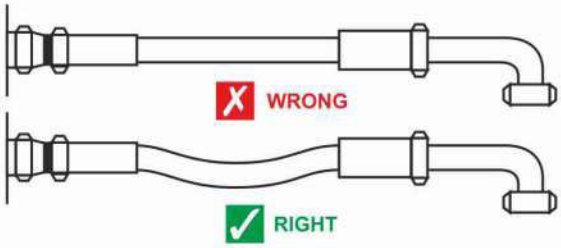
* Suggestions are for oils having maximum viscosity of 315 S.S.U. at +100°F (+38°C) and operating at temperatures between + 65°F and +155°F (+54°C to +69°C). Under certain conditions, velocities in pressure lines can be increased up to 25 feet per second.



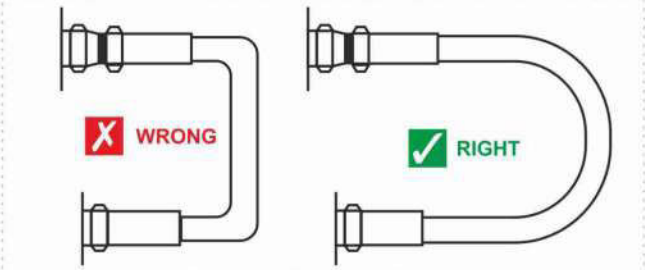
# DO'S AND DON'TS



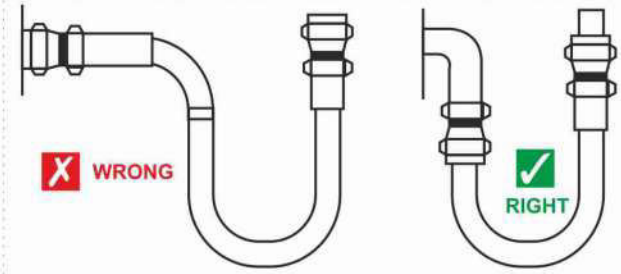

1 When installing hose, make sure it is not twisted. Pressure applied to a twisted hose can result in hose failure or loosening of connections.



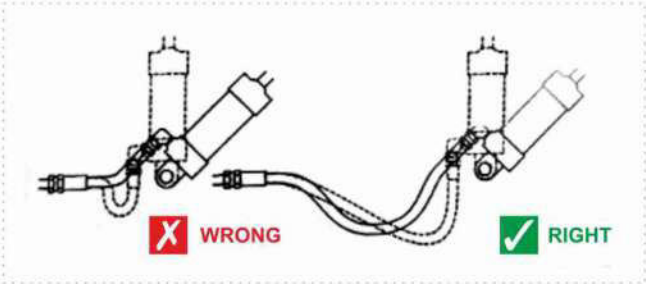

2 When hose installing is straight, allow enough slack in hose line to provide for length changes which will occur when pressure is applied.



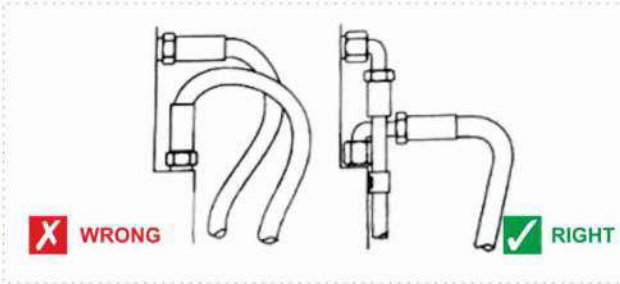

3 To avoid hose collapse and flow restriction, keep hose bend radii as large as possible, Refer to hose specification tables for minimum bend radii.



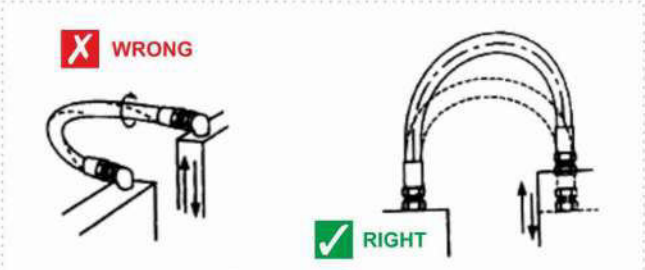

4 Use proper angle adaptors to avoid sharp twist oe bend in hose.



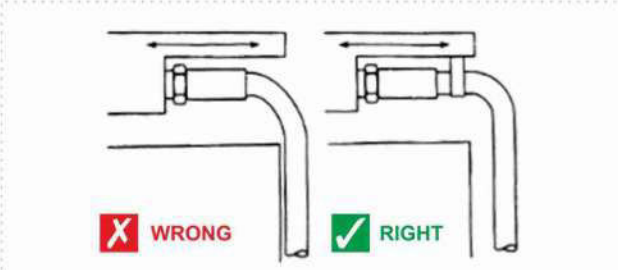

5 Adequate Hose length is necessary to distribute movement on flexing applications and to avoid abrasion.




6 Elbows and adaptors should be use to relive strain on the assembly, provide neater installations which will be more accessible for inspection and maintenance.




7 Prevent twisting and distortion bye bending hose in same plane as the motion of the boss to which hose is connected.




8 Run hose in the installation so that it avoids rubbing and abrasion. Often, Clamps are required to support long hose runs or to keep hose away from moving parts. Use clamps of the correct size. A clamp too allows hose to move inside the clamp and causes abrasion.



Authorised Dealer / Stockist

# VAISHNO RUBBER INDUSTRIES PVT. LTD.

**Works :** NH-24, (Delhi-Haridwar by pass Road) Village-Kokerpur, P.O. Aghwanpur, Moradabad-244001(U.P.)
**Mob.:** +91 9810294483
**E-mail :** info@vaishnorubber.com, satvir21@gmail.com
**Website:** https://www.vaishnorubber.com