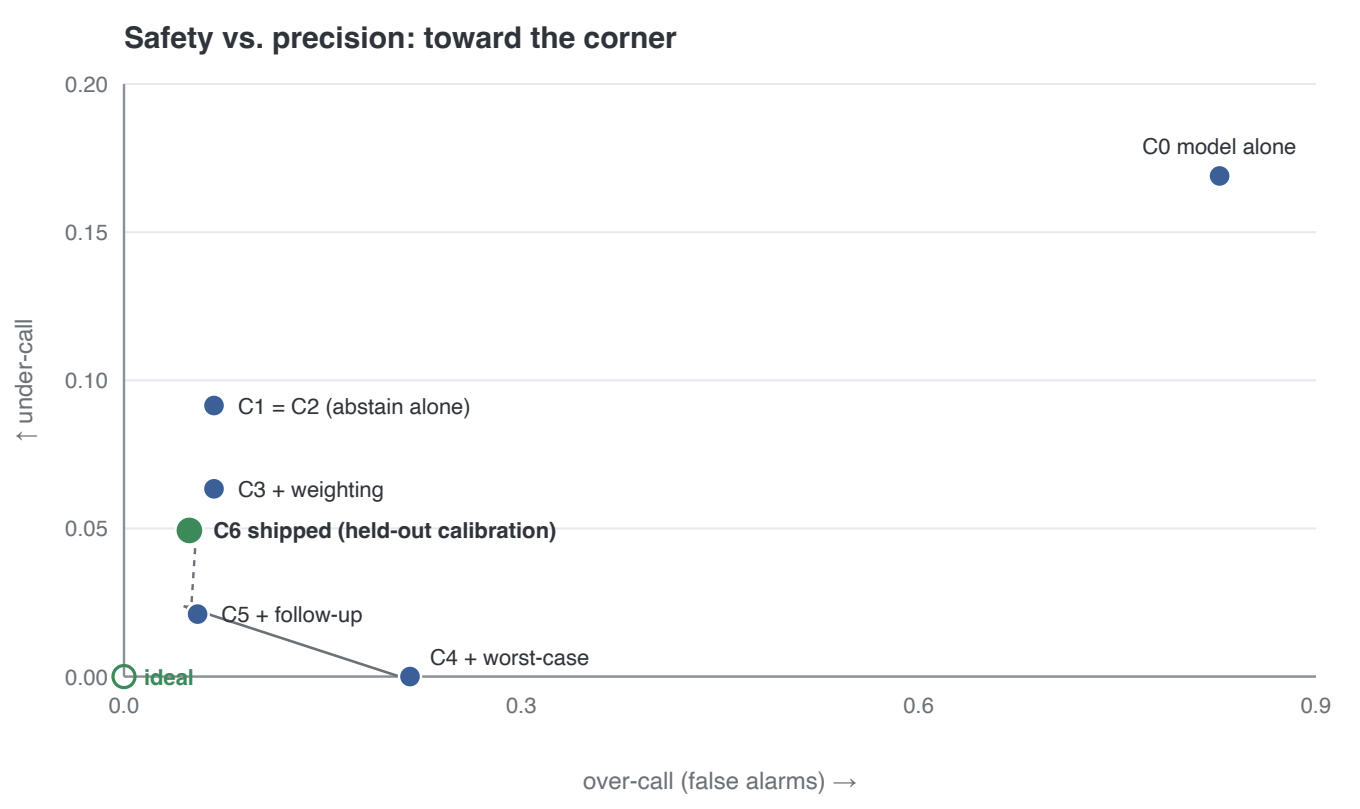
Safety vs. precision: toward the corner
0.20
0.15
0.10
0.05
0.00
↑ under-call
C0 model alone
C1 = C2 (abstain alone)
C3 + weighting
C6 shipped (held-out calibration)
C5 + follow-up
C4 + worst-case
ideal
0.0
0.3
0.6
0.9
over-call (false alarms) →