Ex no: 9
=
12/9/26

Design a simple network topology using cisco packet tracer.

Aim:

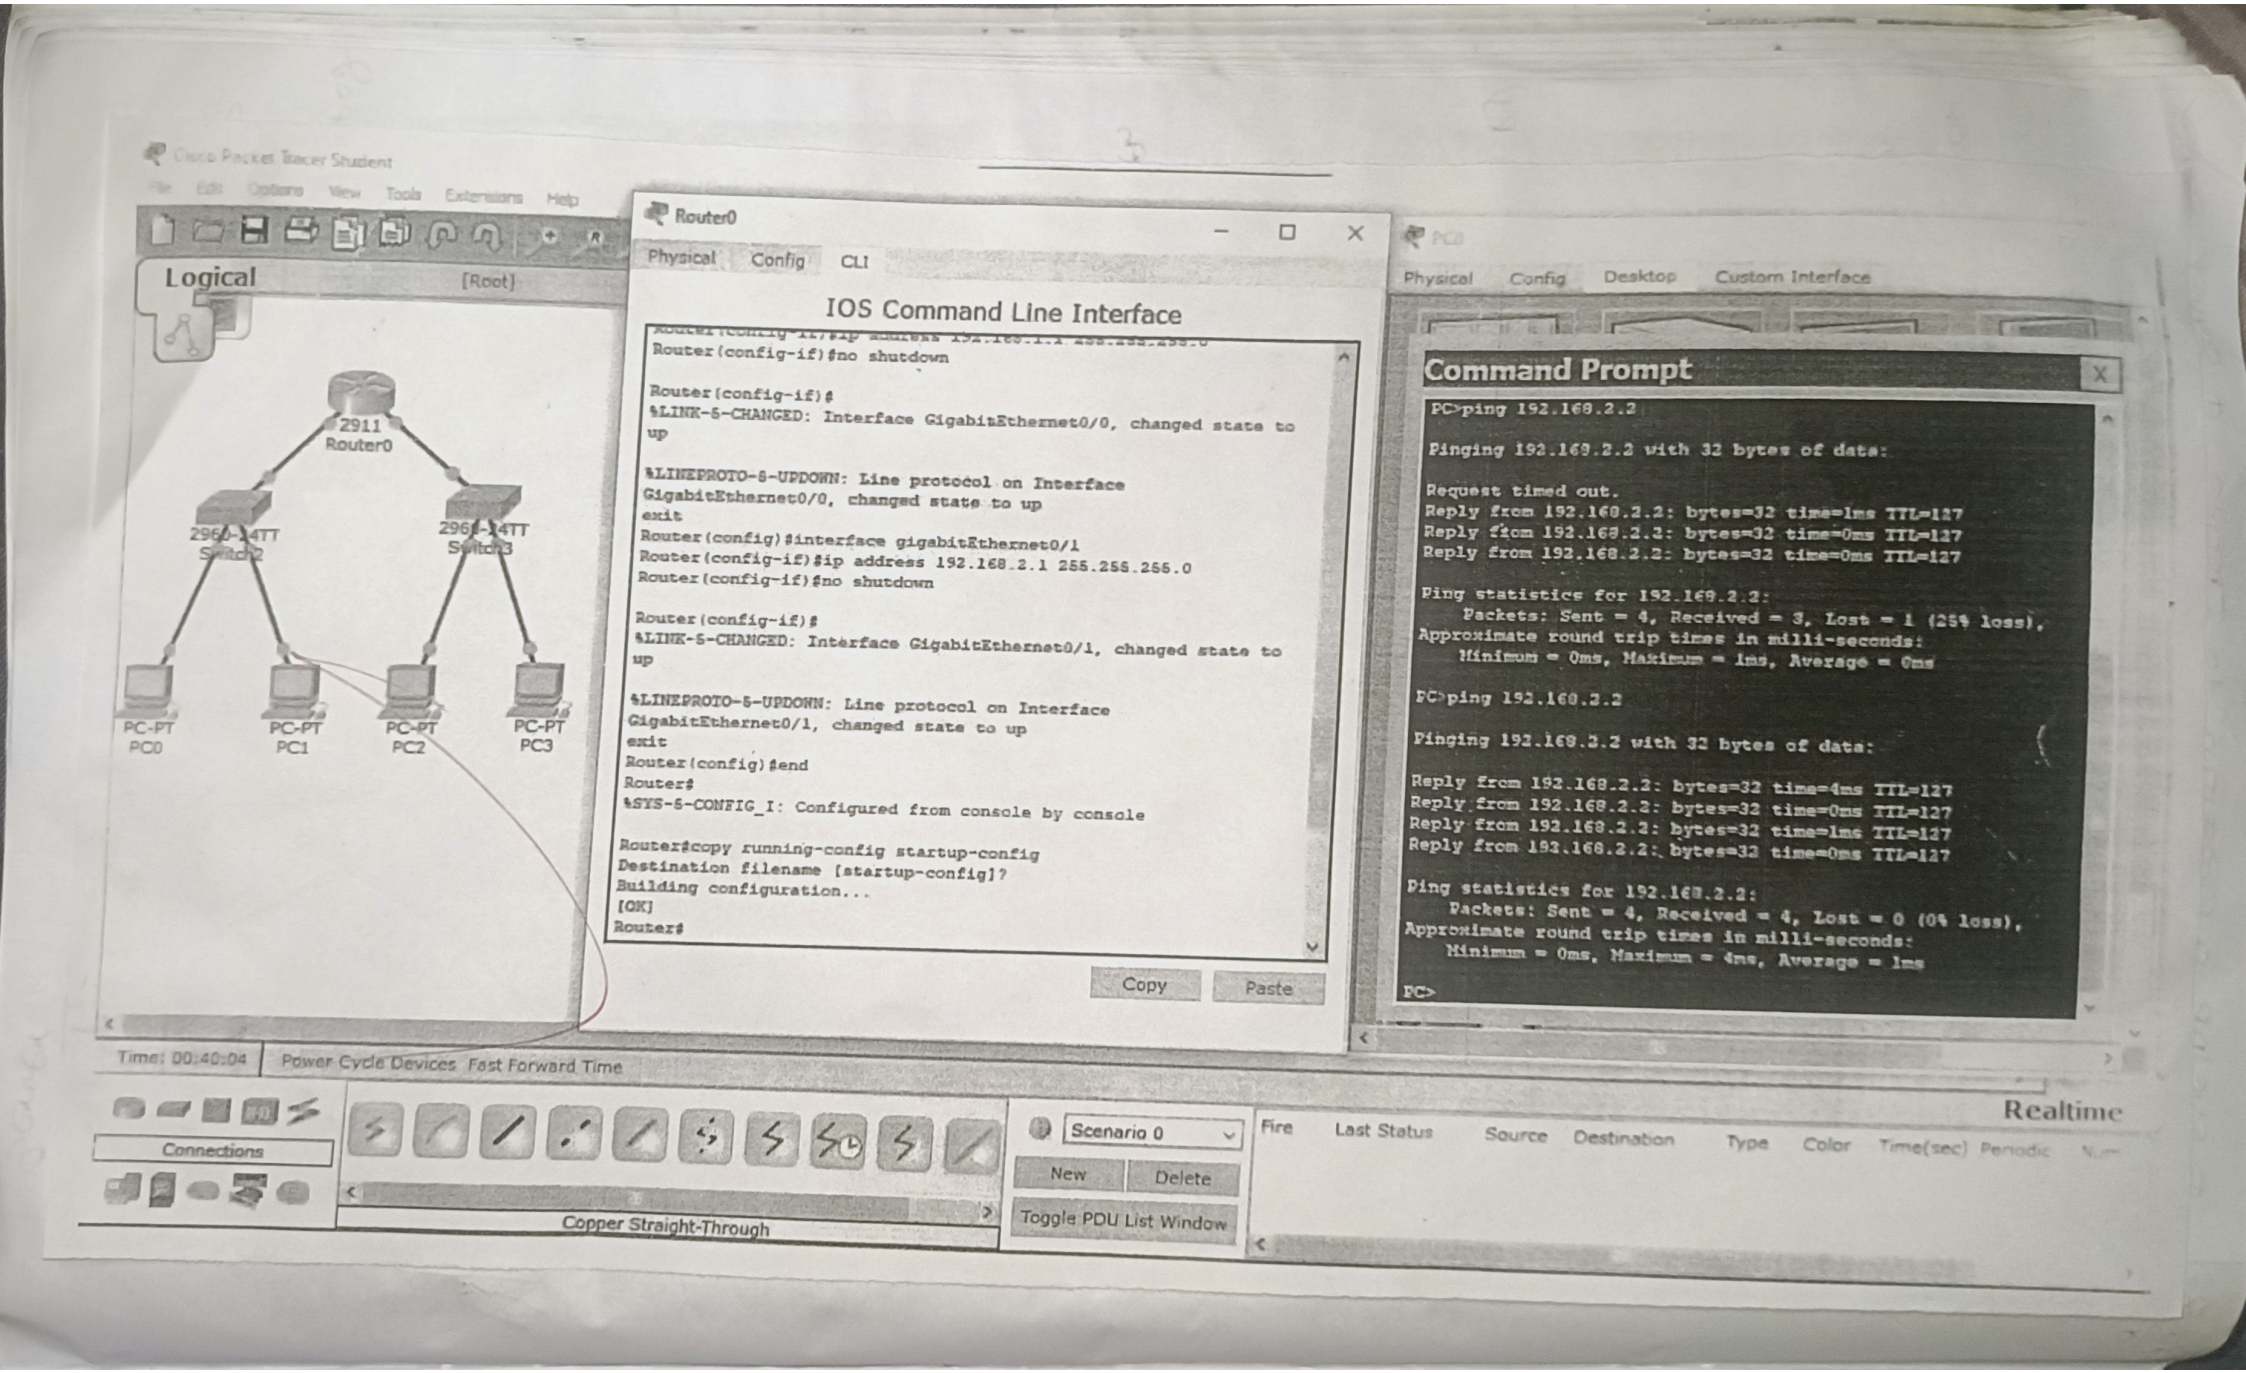
To design and configure a network consisting of one router, two switches and four PCs using cisco packet Tracer and between devices.

Procedure:

- Open cisco packet tracer.
- add one router, two switches, and four PCs.
- connect the devices using straight cables.
- configur the IP address, subnet default gateway of PCs.
- Test connectivity between end pings command.

Result:

the network topology was configured and connectivity between device was verified


Cisco Packet Tracer Student
File Edit Options View Tools Extensions Help
Logical
[Root]
2911
Router0
2960-24TT
Switch2
2960-24TT
Switch3
PC-PT
PC0
PC-PT
PC1
PC-PT
PC2
PC-PT
PC3
Router0
Physical
Config
CLI
IOS Command Line Interface
Router(config-if)#no shutdown
Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0, changed state to up
exit
Router(config)#interface gigabitEthernet0/1
Router(config-if)#ip address 192.168.2.1 255.255.255.0
Router(config-if)#no shutdown
Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1, changed state to up
exit
Router(config)#end
Router#
%SYS-5-CONFIG_I: Configured from console by console
Router#copy running-config startup-config
Destination filename [startup-config]?
Building configuration...
[OK]
Router#
Copy
Paste
PC0
Physical
Config
Desktop
Custom Interface
Command Prompt
PC>ping 192.168.2.2
Pinging 192.168.2.2 with 32 bytes of data:
Request timed out.
Reply from 192.168.2.2: bytes=32 time=1ms TTL=127
Reply from 192.168.2.2: bytes=32 time=0ms TTL=127
Reply from 192.168.2.2: bytes=32 time=0ms TTL=127
Ping statistics for 192.168.2.2:
Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 1ms, Average = 0ms
PC>ping 192.168.2.2
Pinging 192.168.2.2 with 32 bytes of data:
Reply from 192.168.2.2: bytes=32 time=4ms TTL=127
Reply from 192.168.2.2: bytes=32 time=0ms TTL=127
Reply from 192.168.2.2: bytes=32 time=1ms TTL=127
Reply from 192.168.2.2: bytes=32 time=0ms TTL=127
Ping statistics for 192.168.2.2:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 4ms, Average = 1ms
PC>
Time: 00:40:04
Power Cycle Devices
Fast Forward Time
Realtime
Connections
Copper Straight-Through
Scenario 0
New
Delete
Toggle PDU List Window
Fire
Last Status
Source
Destination
Type
Color
Time(sec)
Periodic