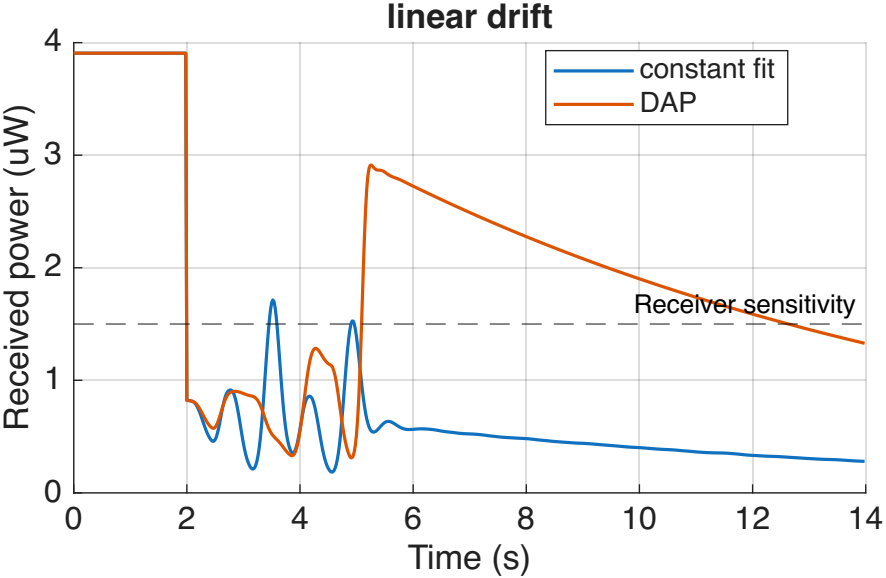
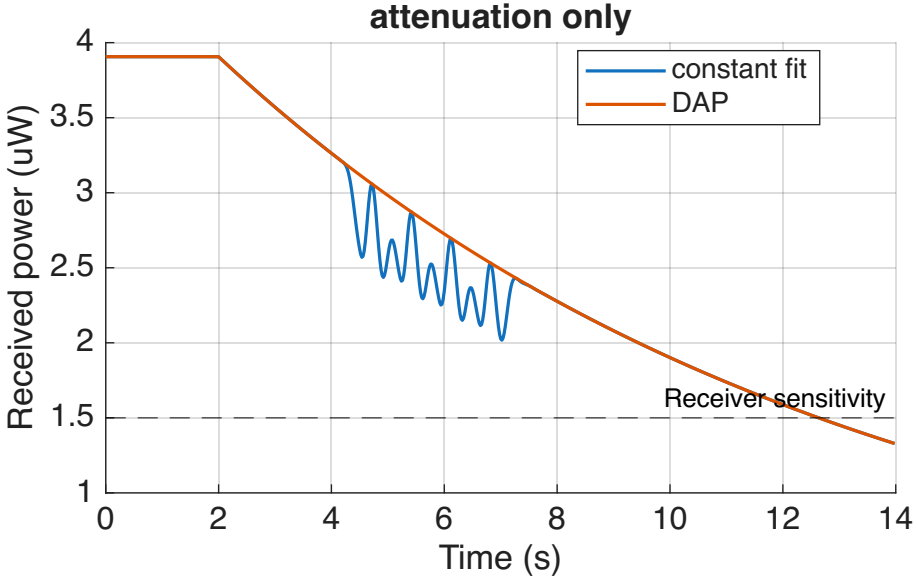
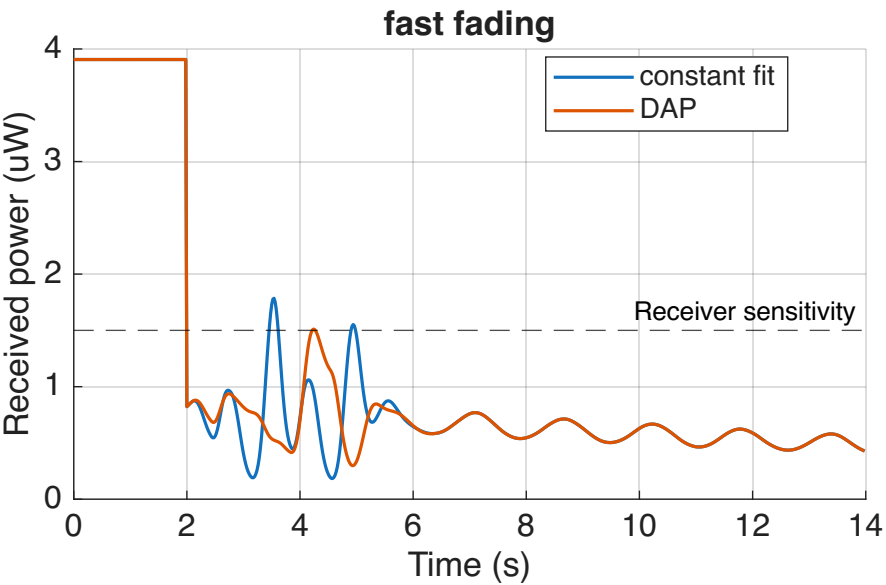
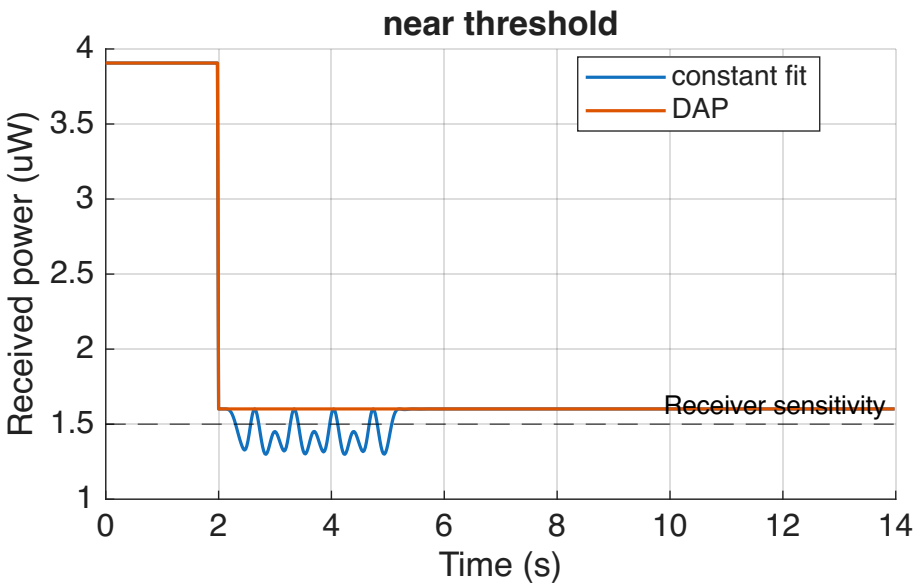

linear drift
constant fit
DAP
Receiver sensitivity
Received power (uW)
Time (s)
0
1
2
3
4
0
2
4
6
8
10
12
14


attenuation only
constant fit
DAP
Receiver sensitivity
Received power (uW)
Time (s)
1
1.5
2
2.5
3
3.5
4
0
2
4
6
8
10
12
14


fast fading
constant fit
DAP
Receiver sensitivity
Received power (uW)
Time (s)
0
1
2
3
4
0
2
4
6
8
10
12
14


near threshold
constant fit
DAP
Receiver sensitivity
Received power (uW)
Time (s)
1
1.5
2
2.5
3
3.5
4
0
2
4
6
8
10
12
14