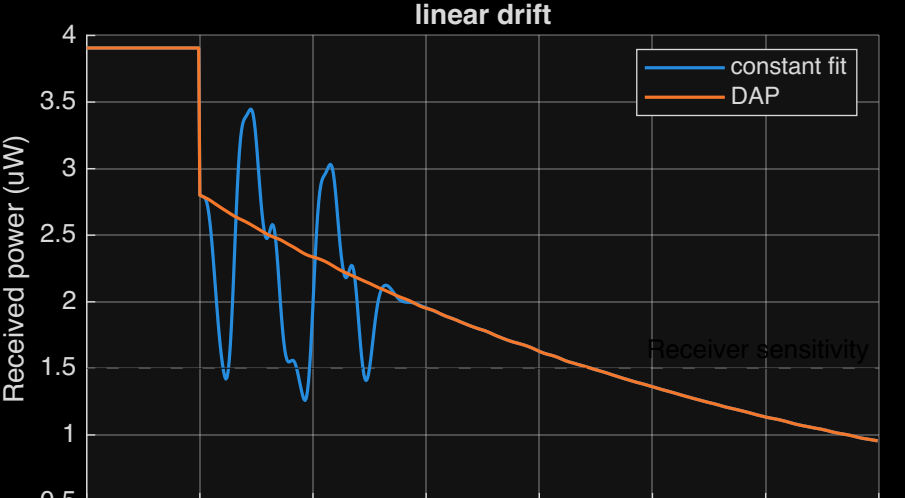
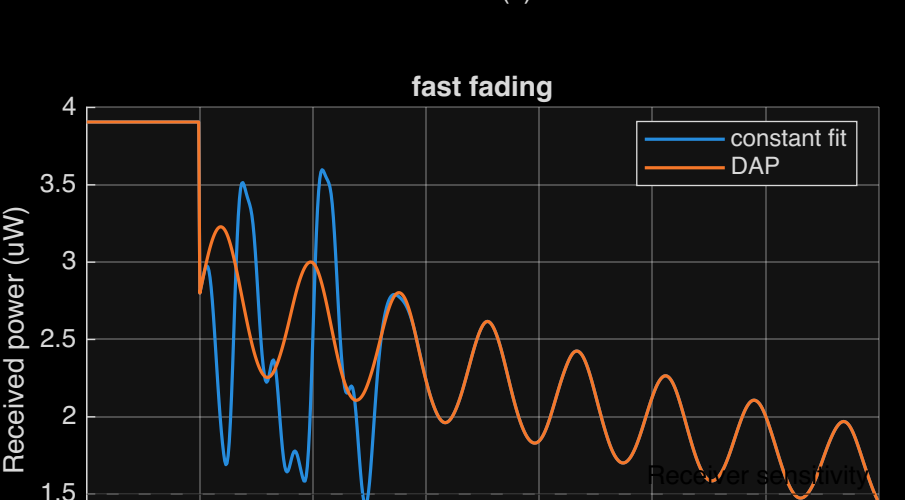
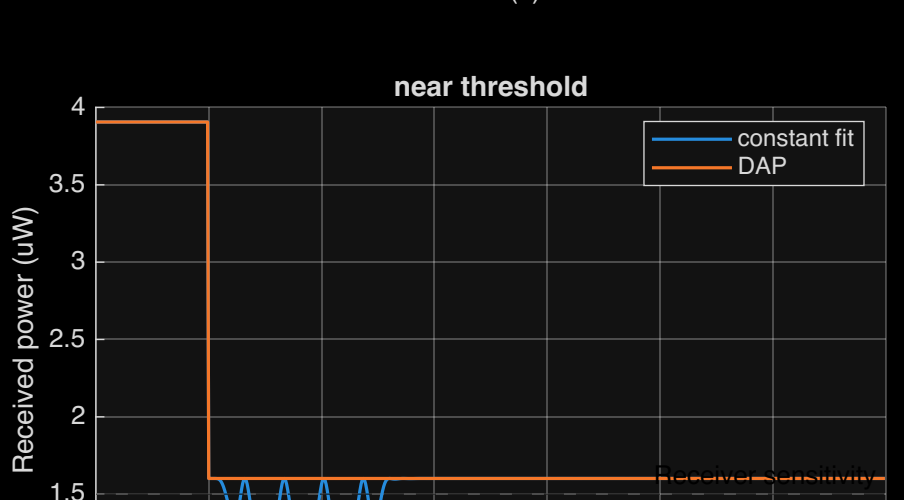

linear drift
constant fit
DAP
Receiver sensitivity
Received power (uW)
Time (s)


attenuation only
constant fit
DAP
Receiver sensitivity
Received power (uW)
Time (s)


fast fading
constant fit
DAP
Receiver sensitivity
Received power (uW)
Time (s)


near threshold
constant fit
DAP
Receiver sensitivity
Received power (uW)
Time (s)