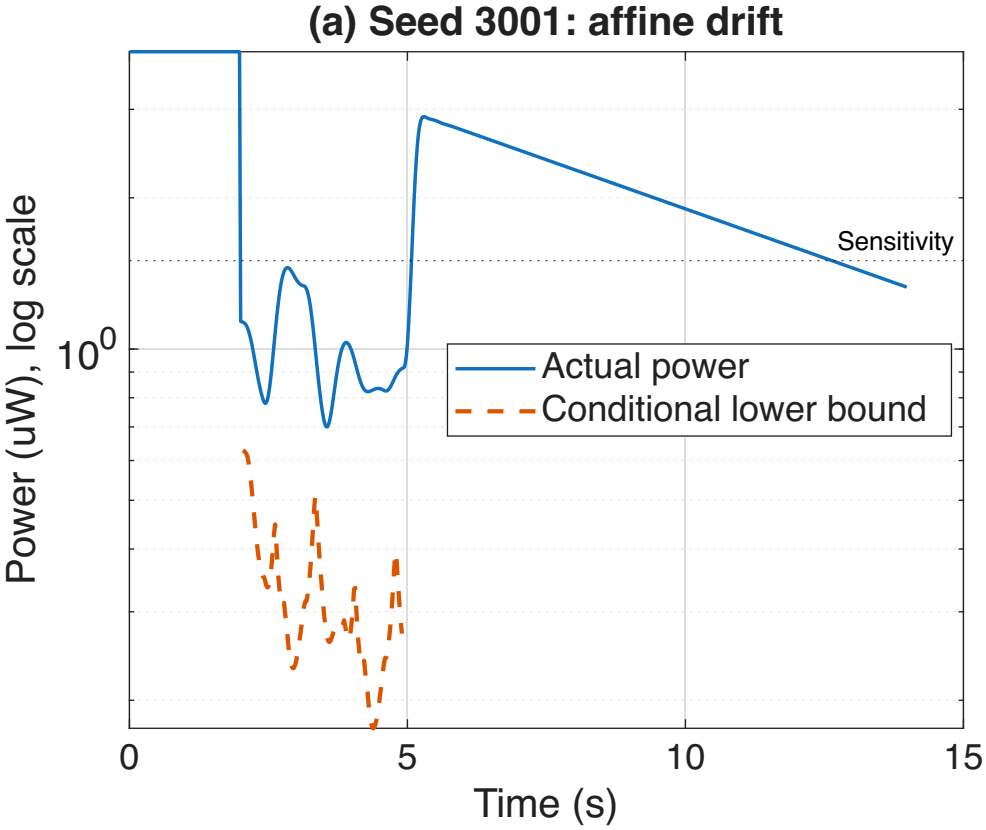
(a) Seed 3001: affine drift
Power (uW), log scale
10^0
Sensitivity
Actual power
Conditional lower bound
0
5
10
15
Time (s)

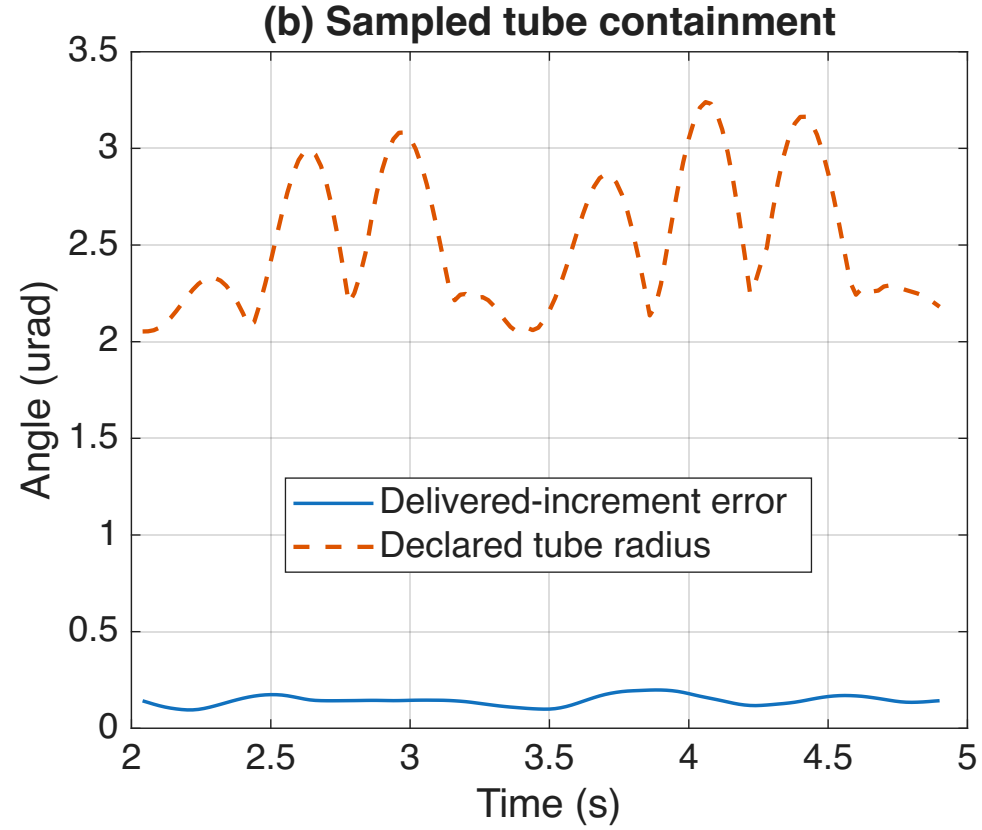
(b) Sampled tube containment
Angle (urad)
3.5
3
2.5
2
1.5
1
0.5
0
Delivered-increment error
Declared tube radius
2
2.5
3
3.5
4
4.5
5
Time (s)