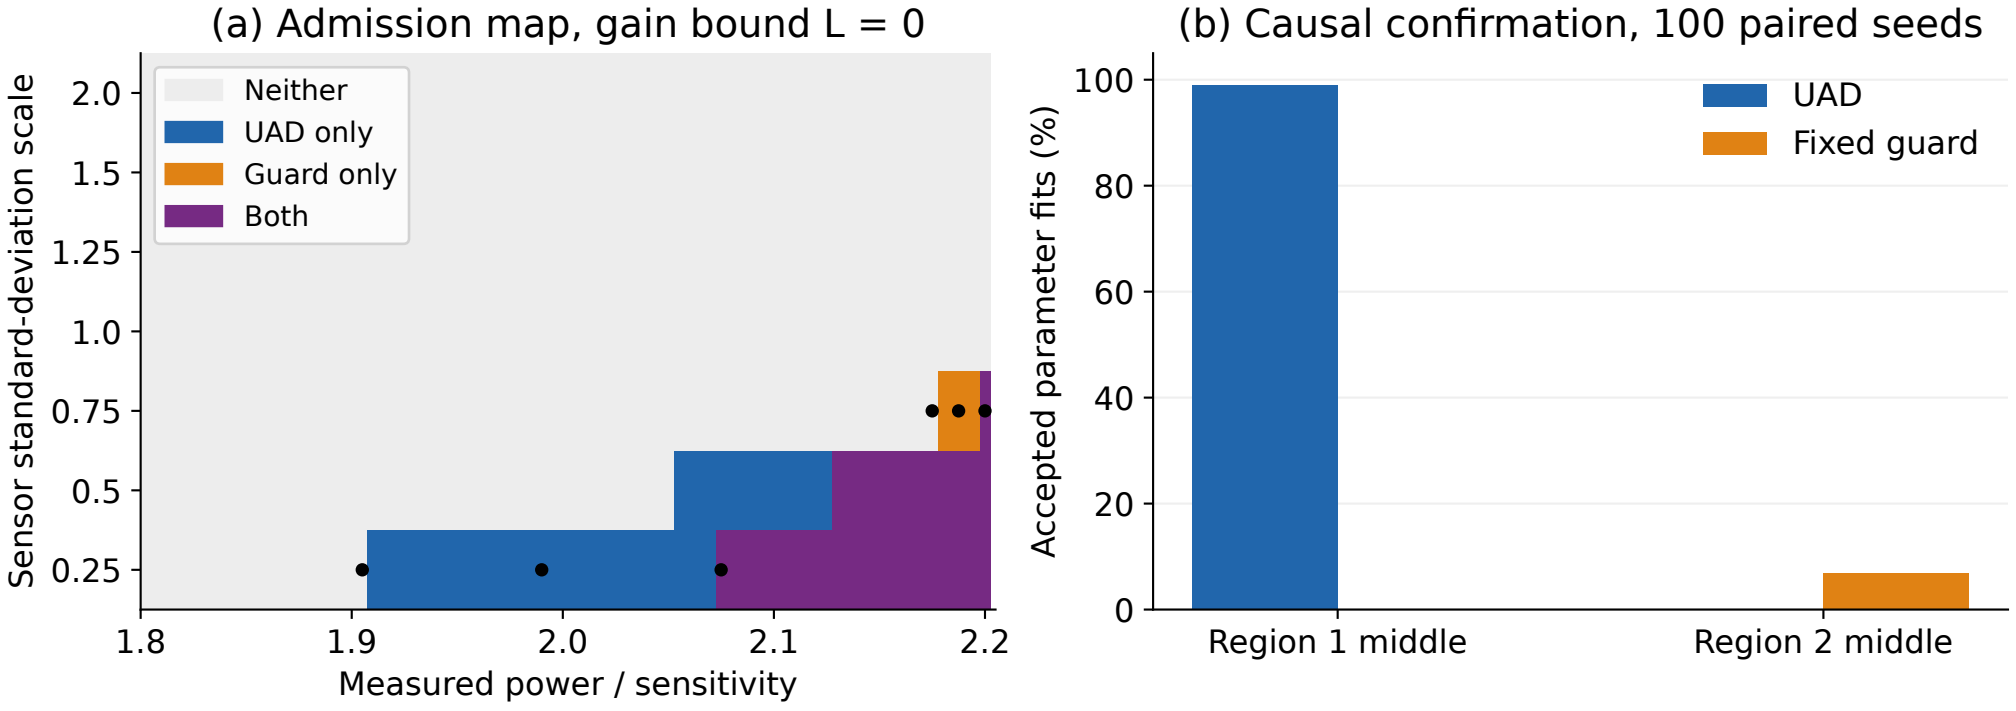
(a) Admission map, gain bound L = 0
Neither
UAD only
Guard only
Both
Sensor standard-deviation scale
2.0
1.5
1.25
1.0
0.75
0.5
0.25
1.8
1.9
2.0
2.1
2.2
Measured power / sensitivity
(b) Causal confirmation, 100 paired seeds
UAD
Fixed guard
Accepted parameter fits (%)
100
80
60
40
20
0
Region 1 middle
Region 2 middle