NIPS membrane discovery | hardware, software and feedback flow

Small bricks = individual operations • Diamonds = decisions / synchronization • Tinted bricks = stored data

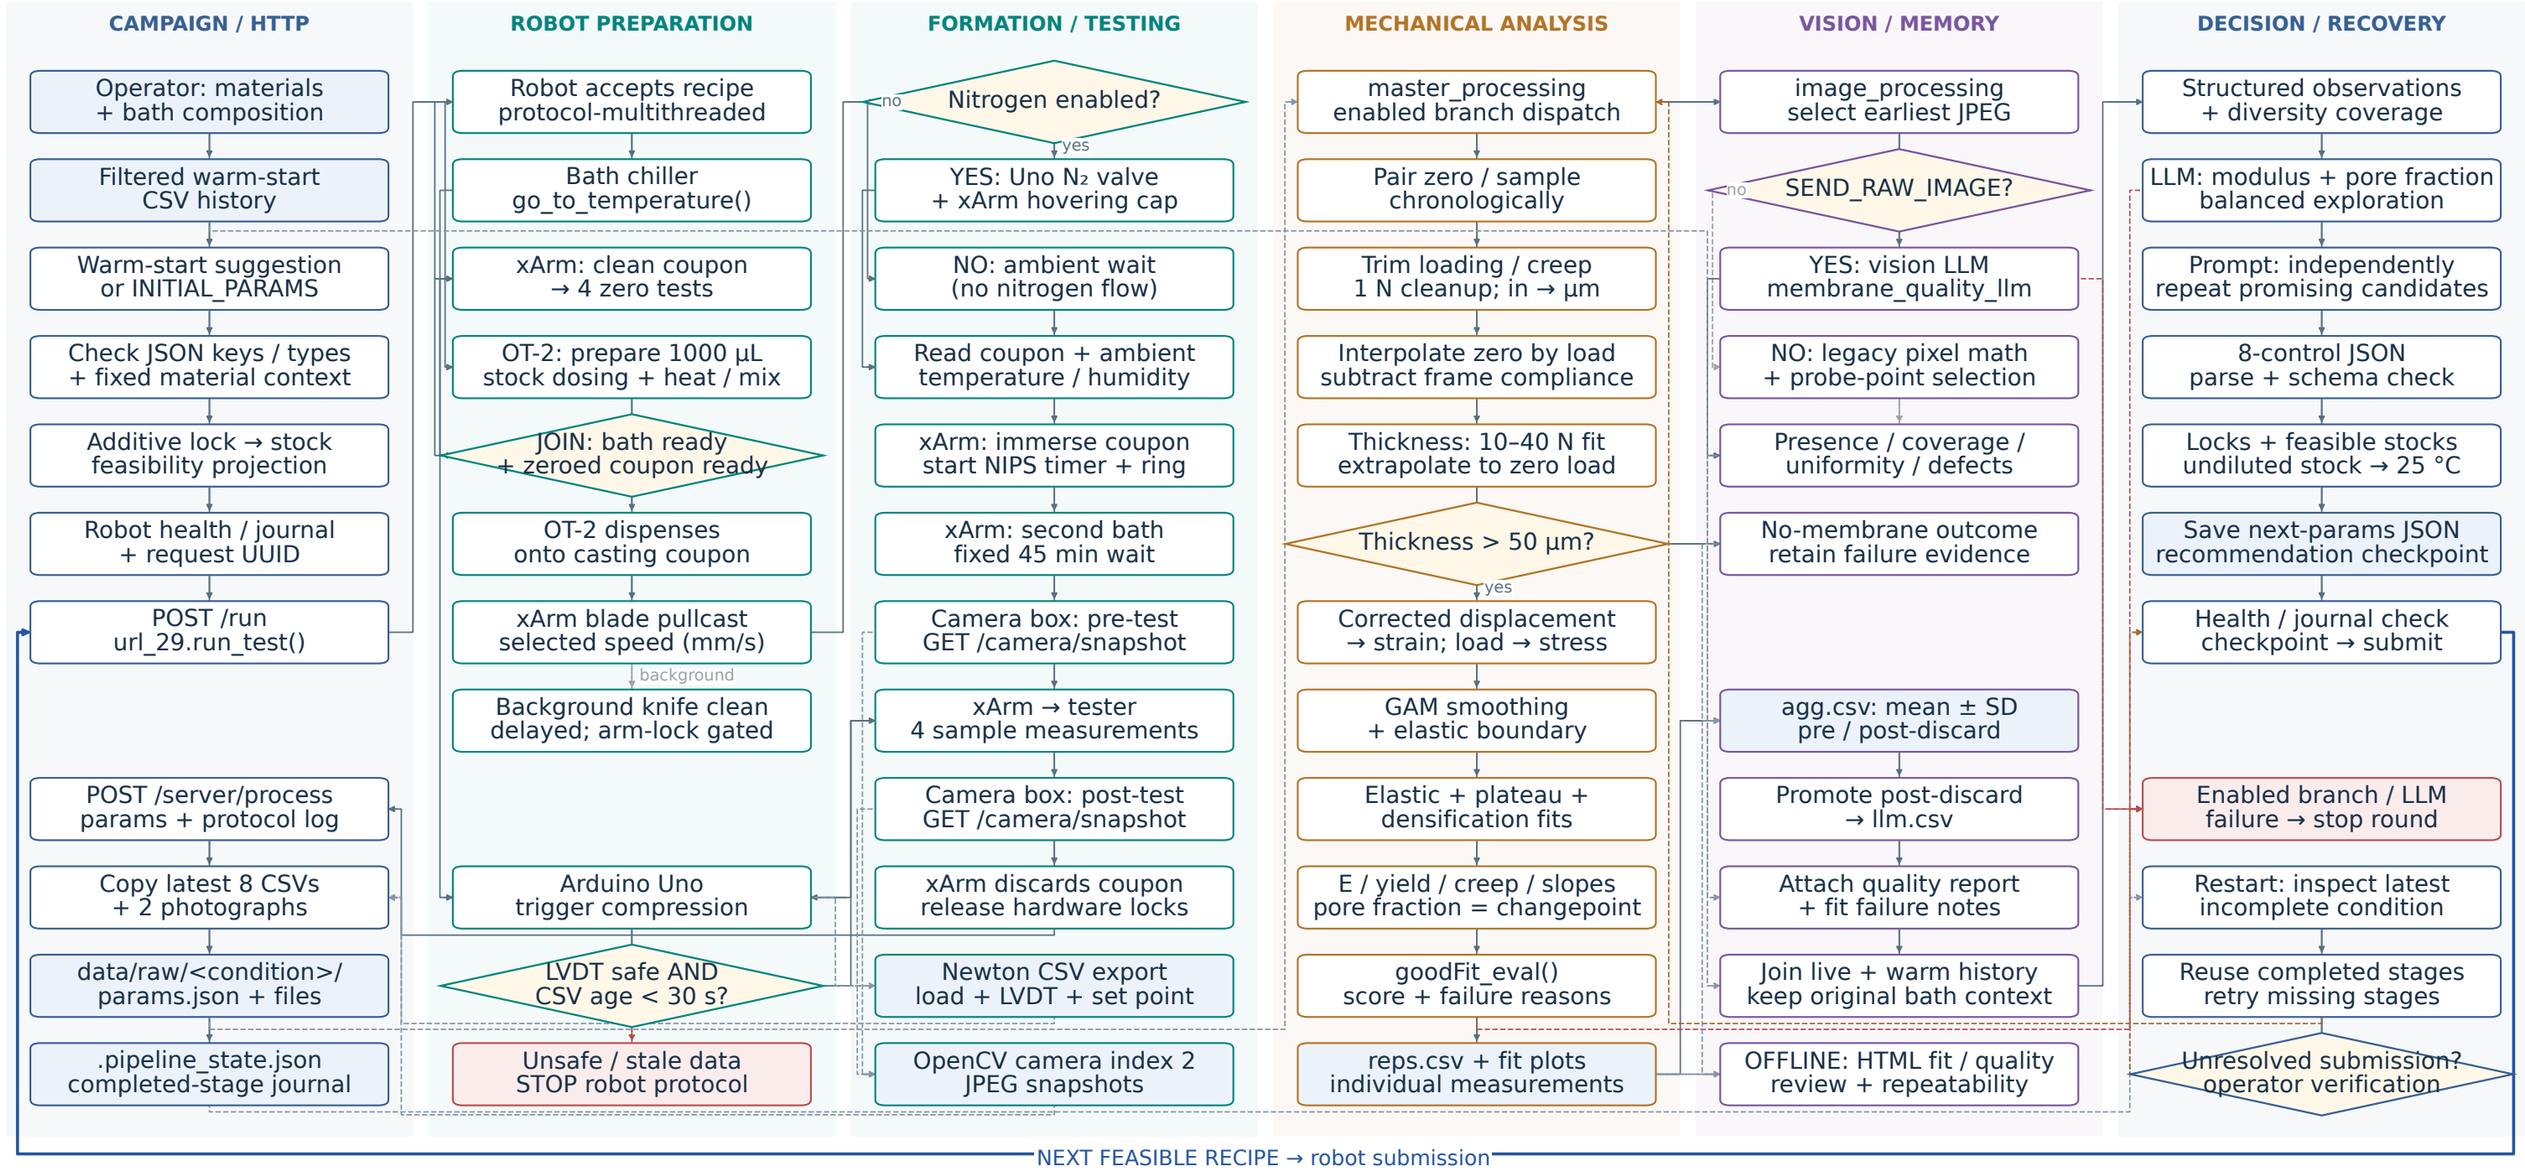

SOLID: control / physical sequence DASHED GREY: data DASHED RED: failure DASHED GOLD: recovery

Current path: both analysis branches enabled; raw-image vision; double_explore; additive = 0 wt%. Hardware preparation forks run concurrently; analysis branches dispatch sequentially. Validation repeats are prompt-directed. Pore fraction is the fitted compression changepoint, not a separate imaging measurement.