




## The GR GROUP

### H FRAME

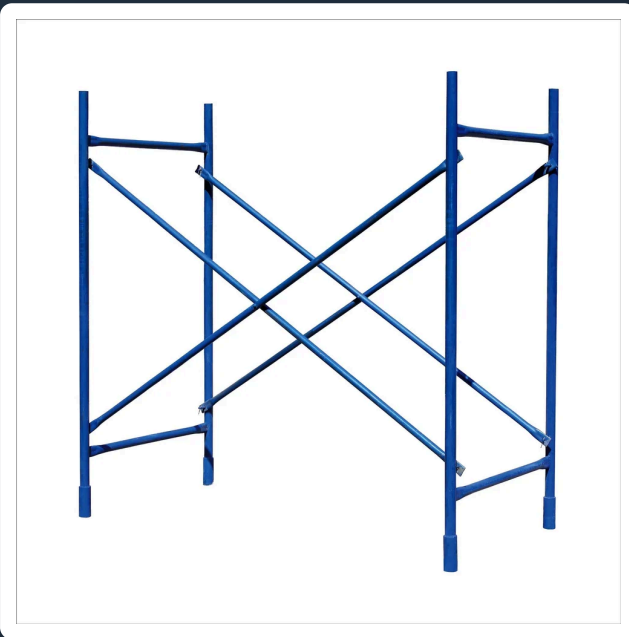

#### H-FRAME SCAFFOLDING SYSTEM

Heavy-duty welded frames used for access and formwork support. Common sizes include 2x1 m, 2x1.5 m, etc. Known for quick assembly, high load-bearing capacity, and easy alignment. Made from MS steel pipes.

### BASE JACK & U HEAD JACK



#### BASE JACK

Used at the bottom of scaffolding for leveling on uneven surfaces. Adjustable and available in solid/hollow models.

#### U HEAD JACK

Positioned at the top of scaffold systems to hold beams and provide vertical adjustment. Suitable for slab support and formwork structures.