

1. Transport

1.1 European Pallet – Standard

Base size: 1200 × 800 mm

AGV compatibility: XQE / XSC / XNA / XPL

Requirement: pallet in good condition, clear fork entry, stable load.



1.2 Industrial / UK Pallet

Base size: 1200 × 1000 mm

AGV compatibility: XQE / XSC / XNA as standard.

XPL: special fork tips / factory arrangement required before order.



For closed pallets or UK pallets, the fork tips must be adapted by factory order. Slanted bottom runners are preferred to help the truck enter and exit the pallet smoothly.

1.3 Customised Pallet Sizes

Custom pallet sizes can be checked when the following points are confirmed:

- Fork width and fork length fit the pallet design.
- Forks must fit into the pallet pockets.
- Fork pocket height should be **minimum 100 mm**.
- Fork length must not be shorter than the pallet pick-up depth.
- Pallet base must be stable and suitable for automatic pick-up.



1.4 Transport Stacking

Stacking can be considered depending on **load type, load weight, height and stability**.

- Same pallet type over same pallet type can be reviewed.
- Mixed pallet stacking is not part of standard release.
- Industrial pallet over Euro pallet is not standard stacking.


Pallet type	Base size	XQE122	XPL	XSC	XNA
Standard European pallet / Palette Europe	1200 x 800 mm				
Non euro pallet			check		

2. Stacking

2.1 EP Gitterbox

Base size: 1185 × 1145 mm

For stacking, the Gitterbox should have **conical feet or self-aligning shape** to compensate small positioning deviations.

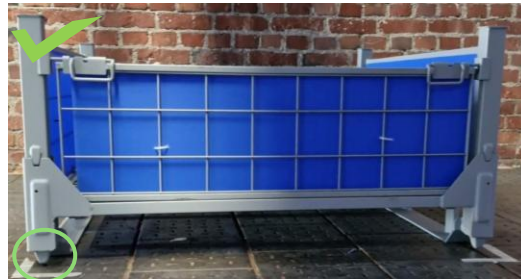

2.2 KTP Boxes

Base size: 1200 × 820 mm


KTP boxes can be stacked when the box has enough guide/tolerance area and can align safely with the lower box or support structure.



2.3 Cages

Cages can be reviewed for stacking when the following points are confirmed:

- Clear fork passage.
- Conical tips or self-aligning design.
- Stable base and support points.
- No open holes or weak areas in the fork contact/support area.

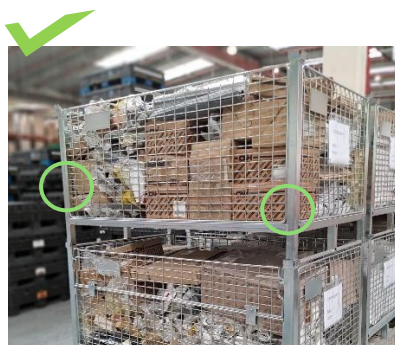

2.4 Tyre Cages

Tyre cages for stacking require:

- Load stays inside the cage shape, with no tyre overhang.
- Conical feet or self-aligning stacking points.




- Fork pocket height: **minimum 100 mm** vertical positioning space.
- Fork pocket width: **100 mm fork width + 50 mm clearance on each side.**



3. Load Condition Check Before AGV Handling

Before AGV handling, check that the pallet base and fork-entry area are clean, open and suitable for automatic pick-up.

- Minimum **60% of the fork-entry opening must be free.**

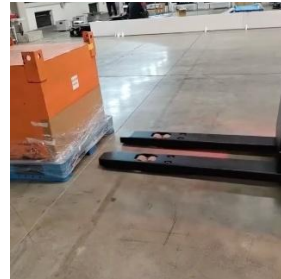

- Foil, straps, labels, cardboard or debris should not block the fork-entry area.
- Pallet or cage should be straight and in good condition.
- Load should be stable, centered and not overhanging.
- AGV approach side and driving route should be clear.

