

1. Product Scope

Model	Rated Load	Lift Height	Truck Size (L × W × H)
XQE122	1.2 t	5.5 m	2426 × 1240 × 3053 mm

2. Mast Options



Confirm lowered height against every door, gate, and overhead obstacle on the travel route before order confirmation.

Spec	Mast	Lift (mm)	Lowered w/ Nav LiDAR (mm)	Lowered w/o Nav LiDAR (mm)	Free Lift (mm)	Max Height (mm)	Lift Speed
Standard	3-F	4500	2718	2393	1368	5523	0.17 m/s
Option	2-F	3200	2965	2640	—	4240	0.17 m/s
Option	2-F	3200	2823	2498	—	4173	0.17 m/s
Option	3-F	5500	3053	2728	1700	6825	0.17 m/s

3. Travel Path



Load Carrier	Operation	Aisle Type	Min. Width	Remarks
Euro Pallet / Cage / Bin	Straight Travel	Single direction	1600 mm	Speed ≤ 0.3 m/s
Euro Pallet / Cage / Bin	Straight Travel	Two-way traffic	2880 mm	Controlled — one truck at a time
Euro Pallet / Cage / Bin	Turn	Single aisle (90° turn)	2450 mm	
Cage / Bin 1200 × 1200 mm	Pick-up / Drop-off	Single aisle — single-side	3000 mm	
Cage / Bin 1200 × 1200 mm	Pick-up / Drop-off	Single aisle — dual-side (two main aisles)	3000 mm	One aisle between each rack row
Cage / Bin 1200 × 1200 mm	Pick-up / Drop-off	Single aisle — dual-side (one main aisle)	3520 mm	Both sides from one aisle

Appendix 1.1: XQE122 Layout Confirmation

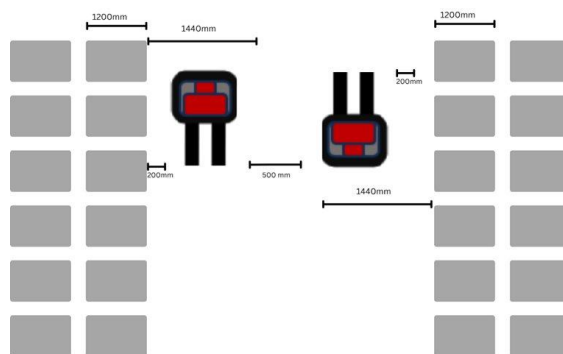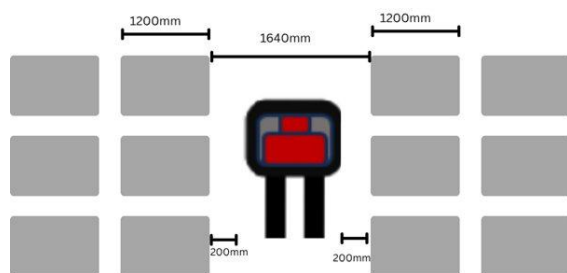

4. Turning / Aisle Change


Area	Minimum	Recommended
Aisle change clear space	2900 mm	3150 mm

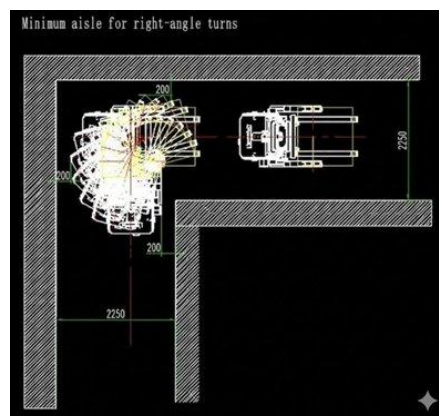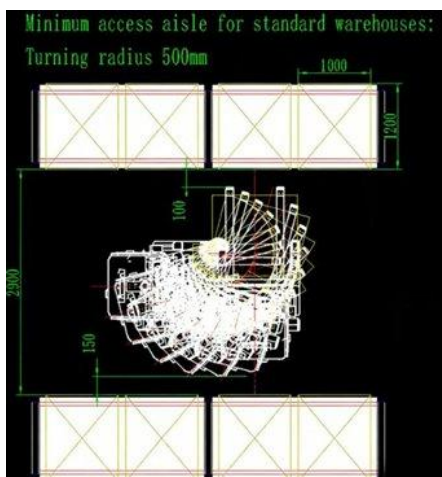

5. Dense Stacking Channel

Item	Value	Note
Truck width	1240 mm	
Clearance — all sides (left, right, front, back)	200 mm	From load face on each side

Confirm fork length and pallet depth per project before quoting channel dimensions.

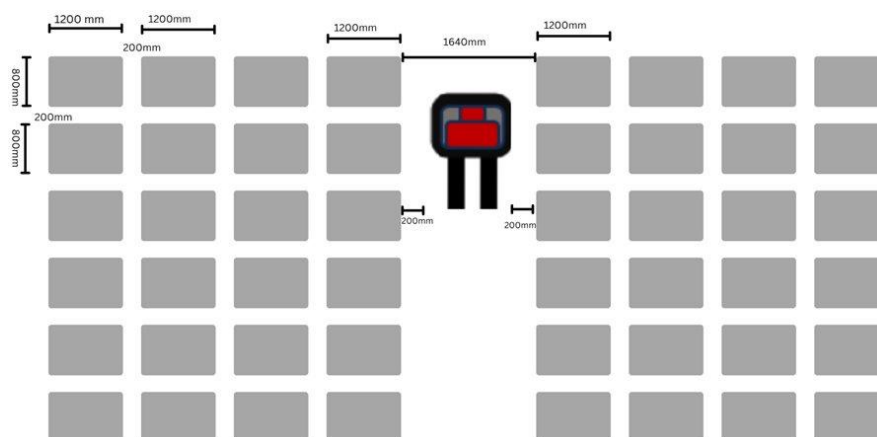


6. Rack Aisle & Dimensions

Rack Aisle Required


Load Carrier	Operation	Aisle Type	Min. Width	Remarks
Euro Pallet / Load ≤ Euro Pallet	Pick-up / Drop-off	Single aisle — single-side	2900 mm	
Euro Pallet / Load ≤ Euro Pallet	Pick-up / Drop-off	Single aisle — dual-side (two main aisles)	2900 mm	One aisle between each rack row
Euro Pallet / Load ≤ Euro Pallet	Pick-up / Drop-off	Single aisle — dual-side (one main aisle)	3520 mm	Both sides from one aisle

If pallet overhangs rack face, measure 200 mm clearance from pallet edge — not rack face.

Appendix 1.1: XQE122 Layout Confirmation

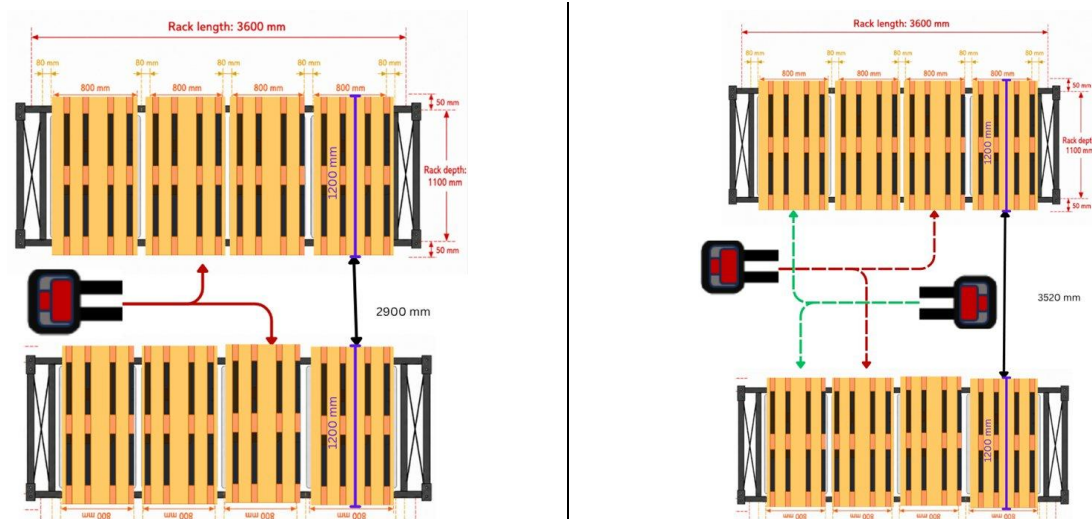


Minimum distance between two adjacent rack rows (face to face): 200 mm.

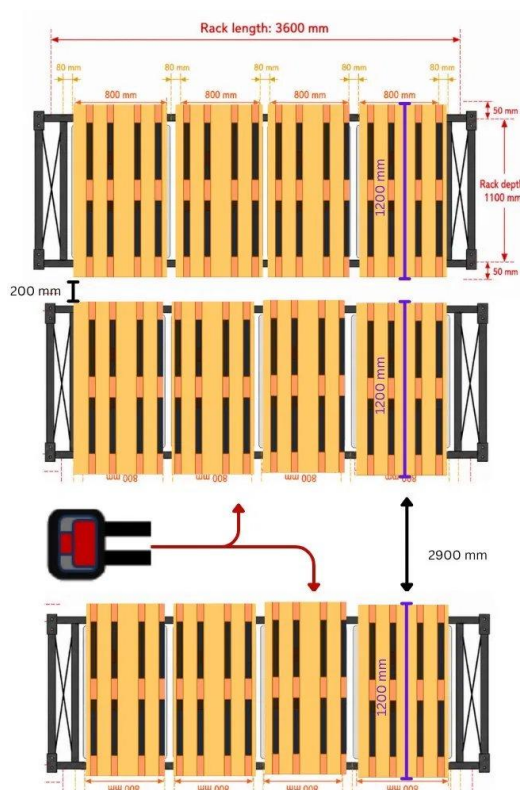

EU Pallet — 800 × 1200 mm


Beam Length	Rack Depth	Pallets / Beam	Pallet Spacing
1900 mm	1100 mm	2 pcs	75 mm min — 100 mm recommended
2700 mm	1100 mm	3 pcs	75 mm min — 100 mm recommended
3600 mm	1100 mm	4 pcs	approx. 80 mm

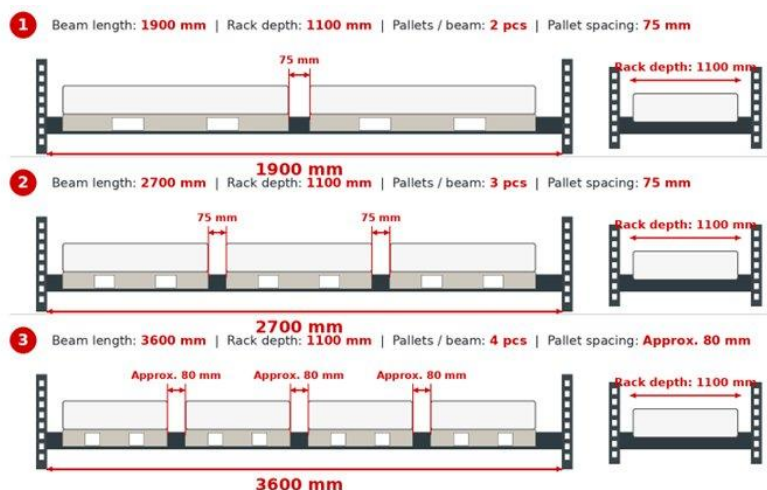

Industrial Pallet — 1000 × 1200 mm

Beam Length	Rack Depth	Pallets / Beam	Pallet Spacing
2700 mm	1100 mm	2 pcs	75–100 mm

Industrial Pallet - 1200 x 1000 mm

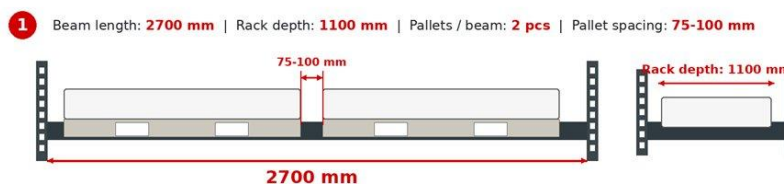

Rack depth minimum 1100 mm across all configurations.

Load Placement Requirements

Operating conditions — not recommendations. Loads outside these limits cause task rejection or collision risk.

Item	Requirement
Load overhang	Not permitted on any side
Load edge to pallet edge (all sides)	≥ 50 mm
Centre of gravity height (from fork surface)	≤ 900 mm
Stacking alignment deviation	≤ 10 mm
Side clearance inside rack (clear space)	≥ 75 mm — recommended ≥ 100 mm
Vertical clearance between rack levels	≥ 150 mm

7. Charging Area

Item	Single Charger	5-Charger Setup
Bay width	1732 mm	$1732 \times 5 = 8660$ mm
End clearance (each side)	400 mm	400 mm each side
Total width required	2800 mm	12900 mm
Approach corridor depth	2900 mm	2900 mm (shared)
Parked truck length	2426 mm	2426 mm
Rear clearance	500 mm	500 mm
Total depth required	5824 mm	5824 mm
Total floor area	~ 16.2 m²	~ 60.6 m²
Trucks charging simultaneously	1	5
Approach lane	Dedicated	Shared — 1 truck at a time
Number of charger units	1	5

Plan charging position into the layout from the start — cannot be added after rack layout is fixed.

