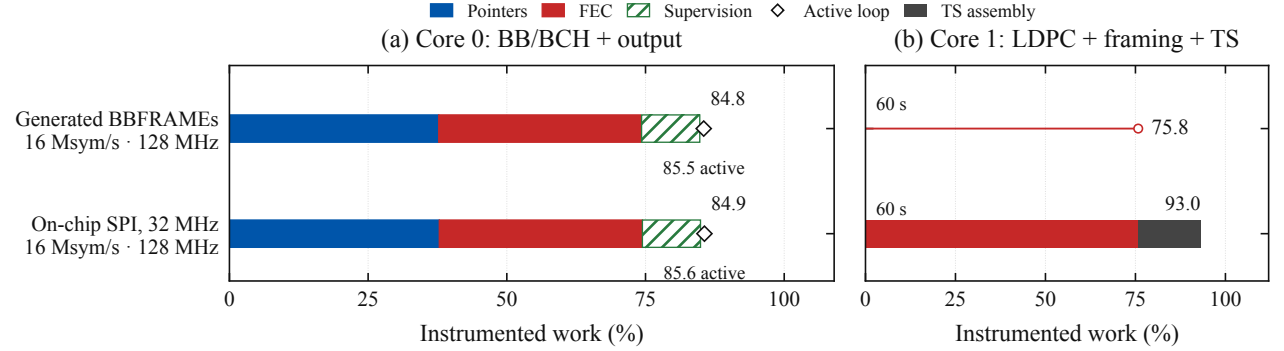

Split FEC, four writers, paired rows; QPSK 2/3 + pilots, L12 at 4 samples/symbol. SPI uses an on-chip master.
Bars sum timed regions; diamonds include the whole active loop when reported. Excluded time is not an idle measurement.