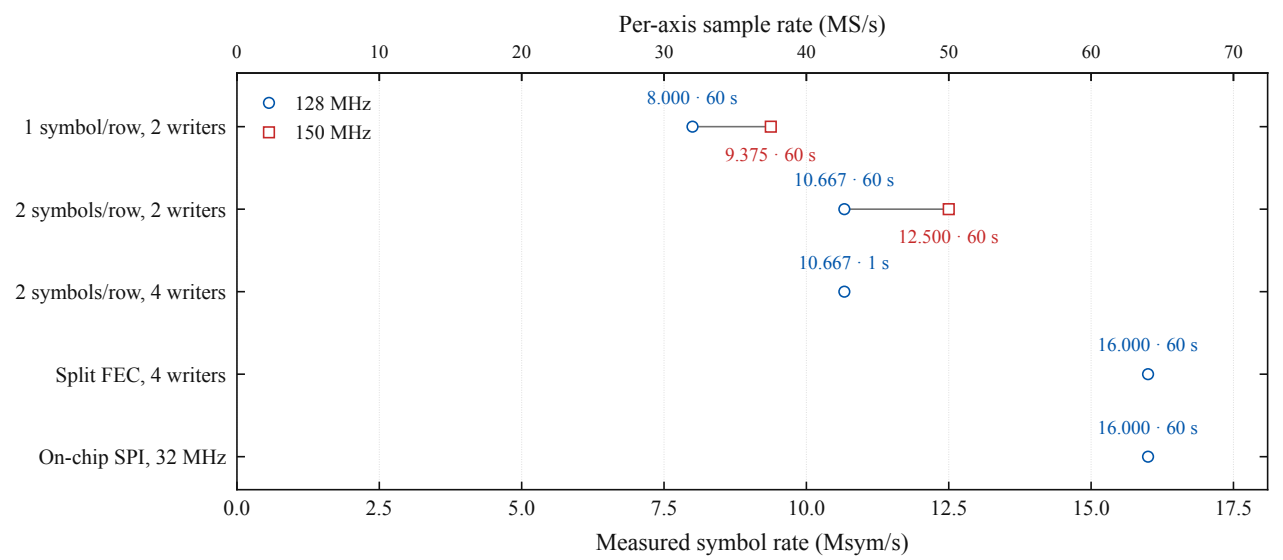

Real QPSK 2/3 encoding, pilots, L = 12, 4 samples/symbol. On-chip SPI uses an emulated master.
Fastest clean configuration; longest test at that setting. Sparse exact captures and continuous fault counters; digital bench only.