



Transmitter load

Shaper, core 0

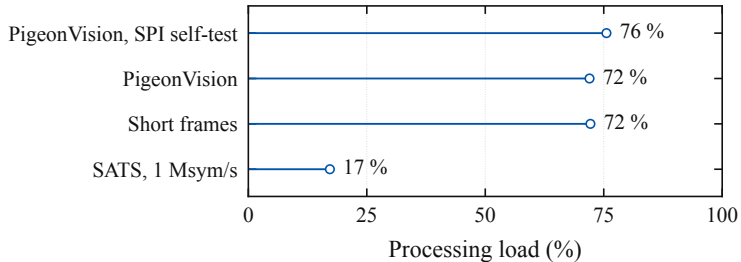

Encoder, core 1

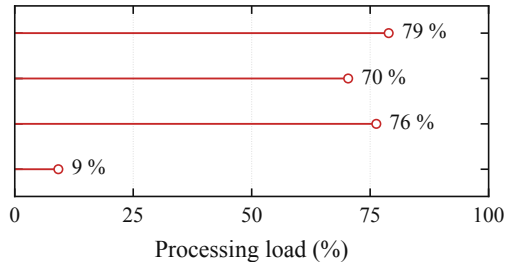

128 MHz; 8 Msym/s at 4 samples/symbol, except SATS (1 Msym/s, 8 samples/symbol). SPI input uses the $L = 12$ windowed shaper, the others $L = 10$. Newest of the longest clean runs; encoding includes TS assembly when used.