


Transmitter load

Shaper, core 0

Encoder, core 1

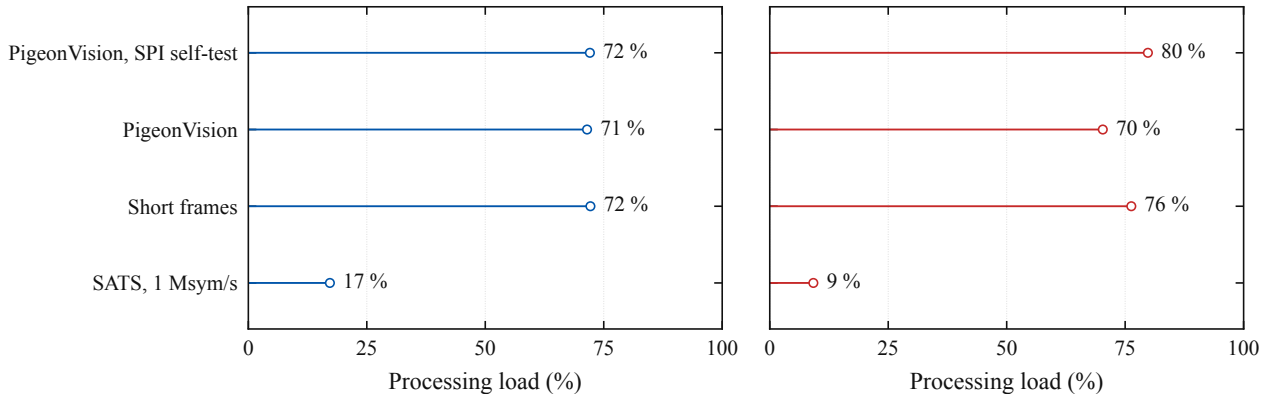

128 MHz; 8 Msym/s at 4 samples/symbol, except SATS (1 Msym/s, 8 samples/symbol).

SPI self-test uses an on-chip master. Longest clean run per configuration; encoding includes TS assembly when used.