Useful payload, finite channel width

Complete Normal 5/6 + pilots + on-chip GCS input; every selected run passed 60 s

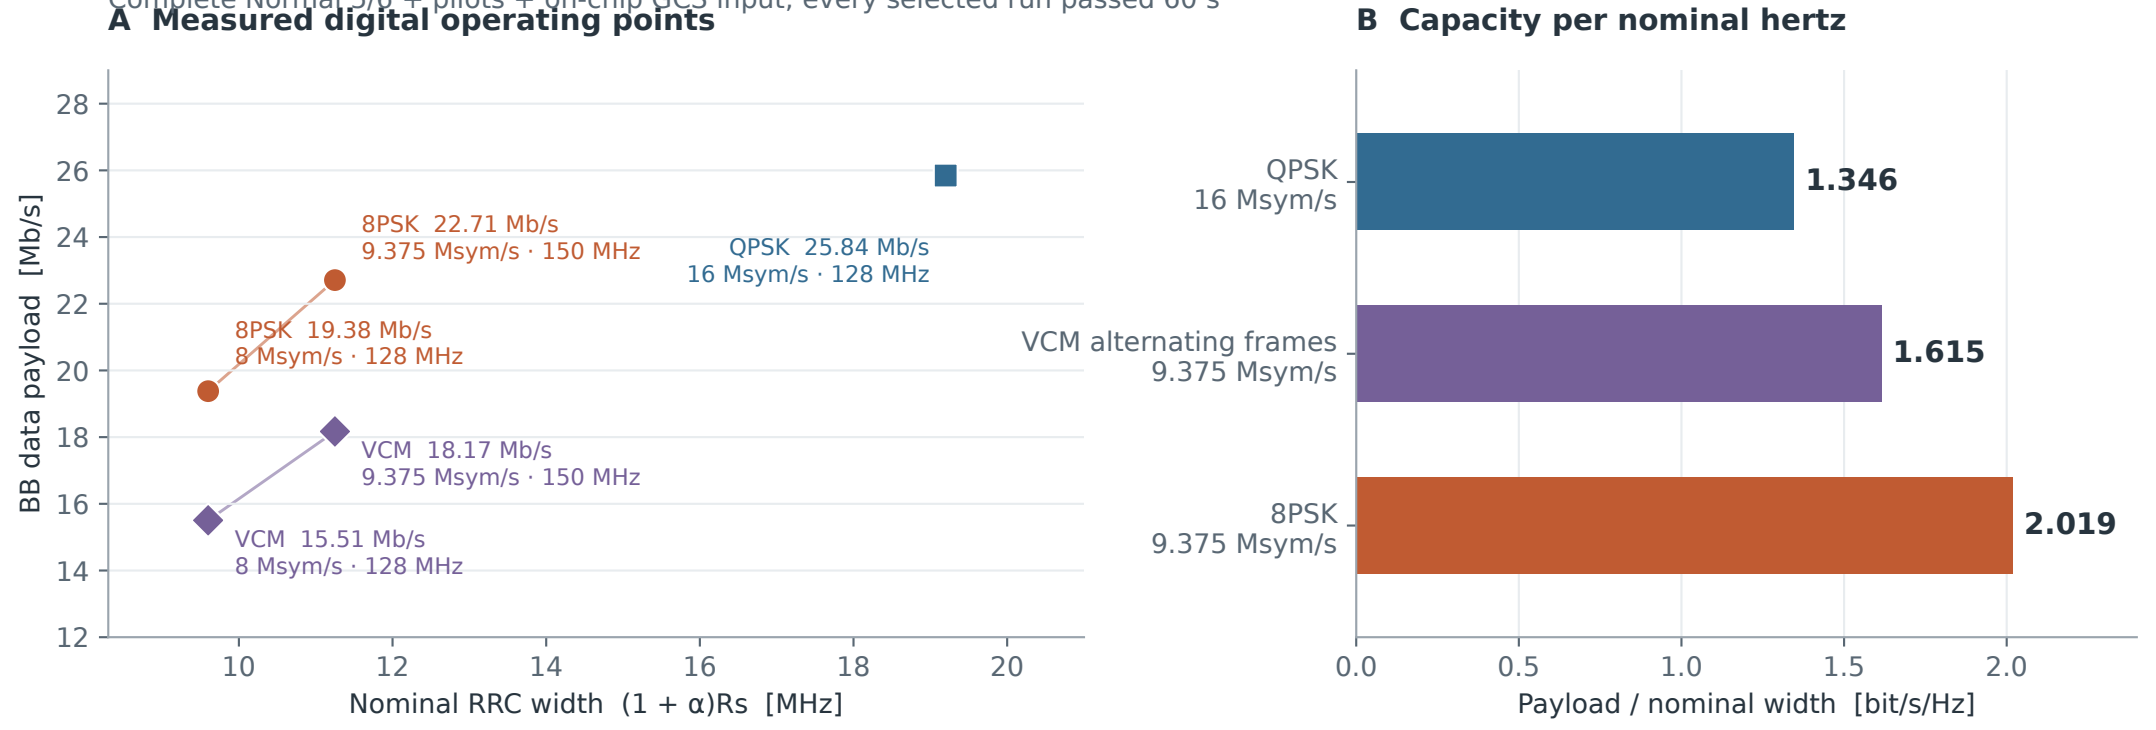

QPSK: L8 / 4 SPS; 8PSK and VCM: L9 / 2 SPS. α=0.20. Payload excludes the 80-bit BBHEADER; VCM alternates complete frames.

Q: pulse-design/.../pico-matched-soak-1:2 8:8psk-live/.../bch-placement-soak-1:4,6 V:vcm/.../soak-1:1,2

Digital GPIO/packet/frame evidence; nominal width is a formula. AFE, sampling images and RF response remain unqualified. Full paths/hashes: waveform_selection.json.