Change the representation, remove the work

Memory, mapper time and shaping time are separate metrics; no inferred full 16APSK throughput

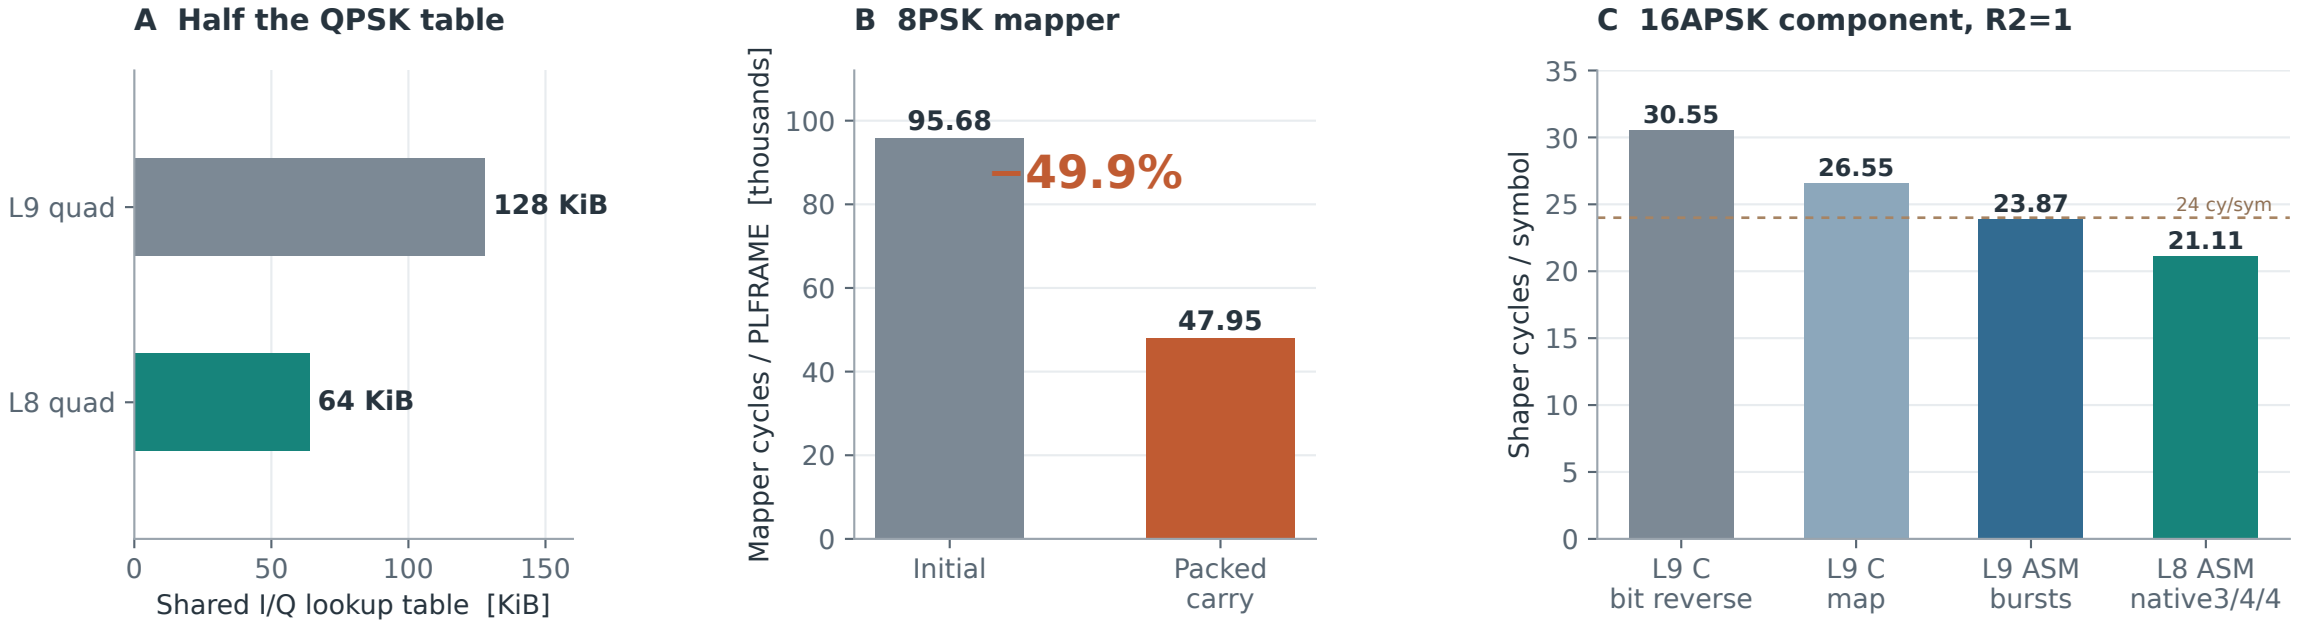

A: matched 60 s descriptors: 2.0110 → 2.0107 cycles/symbol; table memory halves while CPU work stays unchanged.

B: normal 5/6 + pilots, 128 MHz; recorded call averages. C: 32,768 data symbols, 128 MHz, flash cached; last bar changes pulse and quantizer.

24 cy/symbol = 150 MHz / 6.25 Msym/s before output/control/FEC. All component CRCs match; this is not a full 16APSK modem qualification.

Sources: pulse-design/.../pico-matched-soak-1:1–2; higher-mapping/.../first-1,fast-1;16apsk-chunk/.../burst-1,native-l8-1. Exact rows/hashes: waveform_selection.json.