



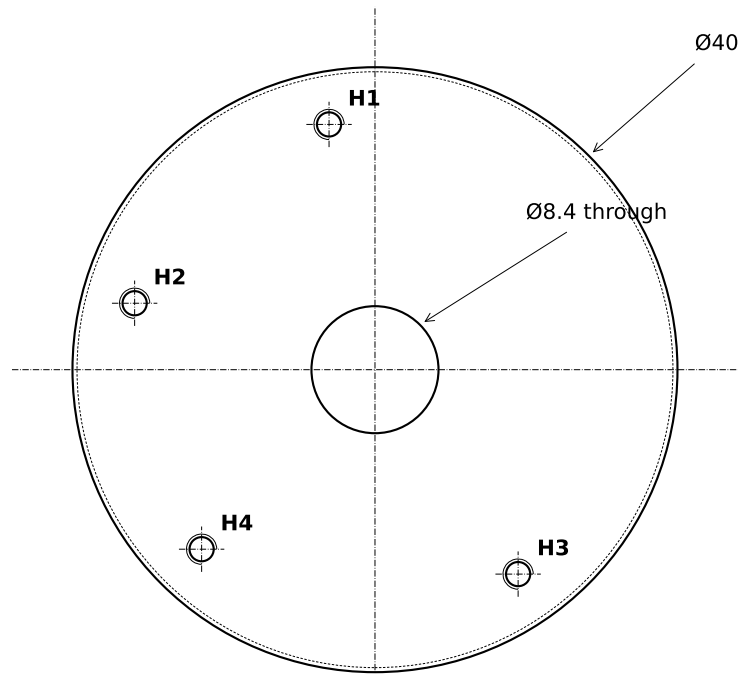

TOP VIEW (cap side, +x right, +y up) 2:1



SIDE VIEW (underside down) 2:1 chamfer 0.3 × 45° on the underside edge

HOLE TABLE (mm, from the plate centre, top view)

Hole	X	Y	Feature
H1	-3.037	16.217	M2×0.4 tapped through (tap drill Ø1.6)
H2	-15.891	4.394	M2×0.4 tapped through (tap drill Ø1.6)
H3	9.464	-13.516	M2×0.4 tapped through (tap drill Ø1.6)
H4	-11.462	-11.869	M2×0.4 tapped through (tap drill Ø1.6)
C	0.000	0.000	Ø8.4 through (bolt clearance)

NOTES

1. Material: aluminium 6061-T6, 2.0 mm sheet. Laser or waterjet cut.
2. 4 × M2×0.4 tapped through (tap drill Ø1.6) at H1-H4. The threads are required: do not leave plain holes.
3. Centre hole Ø8.4 through, for a 5/16-24 UNF bolt.
4. 0.3 × 45° chamfer on the outer edge of the underside only (the face that seats on the weight).
5. Deburr all edges and holes. The top face seals against an O-ring near the rim: keep it flat and free of scratches and burrs.
6. General tolerances ISO 2768-m.
7. Finish: none required. If anodised, mask the threads.

ShotPuck base plate

6061-T6, t = 2.0 mm Ø40 Scale 2:1 on A4 Units mm

Generated 2026-09-30 by mechanical/plate_drawing.py from layout.json