



# simon

SWITCHES AND SOCKETS  


---

DATASHEET

VASTO MODULE

# PAGE CONTENTS

PRODUCT	PAGE NUMBER
SWITCH 1 GANG 16A, 1 WAY	3-4
SWITCH 1 GANG 16A, 2 WAYS	5-6
SWITCH 1 GANG 16A, 3 WAYS - INTERMEDIATE	7-8
SWITCH 2 GANGS 16A, 1 WAY	9-10
SWITCH 2 GANGS 16A, 2 WAYS	11-12
SWITCH 3 GANGS 16A, 1 WAY	13-14
SWITCH 3 GANGS 16A, 2 WAYS	15-16
SWITCH 4 GANGS 16A, 1 WAY	17-18
SWITCH 4 GANGS 16A, 2 WAYS	19-20
BELL PUSH BUTTON	21-22
SWITCH 20A, DP WITH NEON	23-24
SOCKET 13A, SWITCHED DP	25-26
SWITCH 45A, DP WITH NEON	27-28
SOCKET 13A SWITCHED DP & SWITCH 45A WITH NEON (14*7)	29-31
SOCKET 13A SWITCHED DP & USB & TYPE C	32-33
TWIN SOCKET 13A SWITCDED DP (14*7)	34-35
TWIN SOCKET 13A SWITCHED DP & USB & TYPE C (14*7)	36-37
SATELLITE SOCKET	38-39
TELEPHONE SOCKET	40-41
DATA SOCKET	42-43
TEL & DATA SOCKET	44-45
TV & TEL SOCKET	46-47
TV & DATA SOCKET	48-49
LIGHT DIMMER	50-51
VOLUME DIMMER	52-53
PIR MOTION SENSOR	54-55
PIR MOTION SENSOR FOOTLIGHT	56-57
45A CABLE OUTLET	58-59
SHUTTER SWITCH	60-61
USB SOCKET &TYPE C SOCKET	62-63
USB SOCKET & HDMI SOCKET	64-65



## Simon M22

1-Gang 1-Way Switch

### Basic Information

Model no	LI901031
Range	M22-Module
Type	Switch Module
Finishing	White
Highlights	Suitable for 1 Gang Switch Cover LI901548\LI901549\LI901550\LI901551 / / /



### Installation and maintenance

Cable section admitted	2.5MM2
Connection terminals type	screw catch
IP protection	IP20




Material	PC+Metal
Size Height x Width(mm)	88*86
Operating temperature range	0 - 40°C

## Additional information

Rated current	16AX
Rated voltage	250V
Indicator function	No
Standards	IEC 60669-1
Embedding depth (mm)	30
Contacts material	AgCdO
Poles	Single Pole
Connections - terminals	Q195L





## Simon M22

1-Gang 2-Way Switch

### Basic Information

Model no	LI901032
Range	M22-Module
Type	Switch Module
Finishing	White
Highlights	Suitable for 1 Gang Switch Cover LI901548\LI901549\LI901550\LI901551 / / /



### Installation and maintenance

Cable section admitted	2.5MM2
Connection terminals type	screw catch
IP protection	IP20




Material	PC+Metal
Size Height x Width(mm)	88*86
Operating temperature range	0 - 40°C

## Additional information

Rated current	16AX
Rated voltage	250V
Indicator function	No
Standards	IEC 60669-1
Embedding depth (mm)	30
Contacts material	AgCdO
Poles	Single Pole
Connections - terminals	Q195L





## Simon M22

1-Gang 2-Way Intermediate Switch

### Basic Information

Model no	LI901033
Range	M22-Module
Type	Switch Module
Finishing	White
Highlights	Suitable for 1 Gang Switch Cover LI901548\LI901549\LI901550\LI901551 / / /



### Installation and maintenance

Cable section admitted	2.5MM2
Connection terminals type	screw catch
IP protection	IP20




Material	PC+Metal
Size Height x Width(mm)	88*86
Operating temperature range	0 - 40°C

## Additional information

Rated current	16AX
Rated voltage	250V
Indicator function	No
Standards	IEC 60669-1
Embedding depth (mm)	30
Contacts material	AgCdO
Poles	Single Pole
Connections - terminals	Q195L





## Simon M22

2-Gang 1-Way Switch

### Basic Information

Model no	LI901034
Range	M22-Module
Type	Switch Module
Finishing	White
Highlights	Suitable for 2 Gang Switch Cover LI901552\LI901553\LI901554\LI901555 /
	/
	/



### Installation and maintenance

Cable section admitted	2.5MM2
Connection terminals type	screw catch
IP protection	IP20




Material	PC+Copper
Size Height x Width(mm)	88*86
Operating temperature range	0 - 40°C

## Additional information

Rated current	16AX
Rated voltage	250V
Indicator function	No
Standards	IEC 60669-1
Embedding depth (mm)	30
Contacts material	AgCdO
Poles	Single Pole
Connections - terminals	Q195L





## Simon M22

2-Gang 2-Way Switch

### Basic Information

Model no	LI901035
Range	M22-Module
Type	Switch Module
Finishing	White
Highlights	Suitable for 2 Gang Switch Cover LI901552\LI901553\LI901554\LI901555 /
	/
	/



### Installation and maintenance

Cable section admitted	2.5MM2
Connection terminals type	screw catch
IP protection	IP20




Material	PC+Copper
Size Height x Width(mm)	88*86
Operating temperature range	0 - 40°C

## Additional information

Rated current	16AX
Rated voltage	250V
Indicator function	No
Standards	IEC 60669-1
Embedding depth (mm)	30
Contacts material	AgCdO
Poles	Single Pole
Connections - terminals	Q195L





## Simon M22

3-Gang 1-Way Switch

### Basic Information

Model no	LI901036
Range	M22-Module
Type	Switch Module
Finishing	White
Highlights	Suitable for 3 Gang Switch Cover LI901556\LI901557\LI901558\LI901559 /
	/
	/



### Installation and maintenance

Cable section admitted	2.5MM2
Connection terminals type	screw catch
IP protection	IP20




Material	PC+Metal
Size Height x Width(mm)	88*86
Operating temperature range	0 - 40°C

## Additional information

Rated current	16AX
Rated voltage	250V
Indicator function	No
Standards	IEC 60669-1
Embedding depth (mm)	30
Contacts material	AgCdO
Poles	Single Pole
Connections - terminals	Q195L





## Simon M22

3-Gang 2-Way Switch

### Basic Information

Model no	LI901037
Range	M22-Module
Type	Switch Module
Finishing	White
Highlights	Suitable for 3 Gang Switch Cover LI901556\LI901557\LI901558\LI901559 / / /



### Installation and maintenance

Cable section admitted	2.5MM2
Connection terminals type	screw catch
IP protection	IP20




Material	PC+Metal
Size Height x Width(mm)	88*86
Operating temperature range	0 - 40°C

## Additional information

Rated current	16AX
Rated voltage	250V
Indicator function	No
Standards	IEC 60669-1
Embedding depth (mm)	30
Contacts material	AgCdO
Poles	Single Pole
Connections - terminals	Q195L






## Simon M22

4-Gang 1-Way Switch

### Basic Information

Model no	LI901038
Range	M22-Module
Type	Switch Module
Finishing	White
Highlights	Suitable for 4 Gang Switch Cover LI901560\LI901561\LI901562\LI901563 /
	/
	/



### Installation and maintenance

Cable section admitted	2.5MM2
Connection terminals type	screw catch
IP protection	IP20




Material	PC+Metal
Size Height x Width(mm)	88*86
Operating temperature range	0 - 40°C

## Additional information

Rated current	16AX
Rated voltage	250V
Indicator function	No
Standards	IEC 60669-1
Embedding depth (mm)	30
Contacts material	AgCdO
Poles	Single Pole
Connections - terminals	Q195L






## Simon M22

4-Gang 2-Way Switch

### Basic Information

Model no	LI901039
Range	M22-Module
Type	Switch Module
Finishing	White
Highlights	Suitable for 4 Gang Switch Cover LI901560\LI901561\LI901562\LI901563 /
	/
	/



### Installation and maintenance

Cable section admitted	2.5MM2
Connection terminals type	screw catch
IP protection	IP20




Material	PC+Metal
Size Height x Width(mm)	88*86
Operating temperature range	0 - 40°C

## Additional information

Rated current	16AX
Rated voltage	250V
Indicator function	No
Standards	IEC 60669-1
Embedding depth (mm)	30
Contacts material	AgCdO
Poles	Single Pole
Connections - terminals	Q195L





## Simon M22

1-Gang Bell Switch

### Basic Information

Model no	LI901040
Range	M22-Module
Type	Switch Module
Finishing	White
Highlights	Suitable for 1-Gang Bell Switch Cover LI901564\LI901565\LI901566\LI901567 / / /



### Installation and maintenance

Cable section admitted	2.5MM2
Connection terminals type	screw catch
IP protection	IP20



Material	PC+Metal
Size Height x Width(mm)	88*86
Operating temperature range	0 - 40°C

## Additional information

Rated current	16AX
Rated voltage	250V
Indicator function	No
Standards	IEC 60669-1
Embedding depth (mm)	30
Contacts material	AgCdO
Poles	Single Pole
Connections - terminals	Q195L





## Simon M22

1-Gang 20A DP Switch with Neon

### Basic Information

Model no	LI901041
Range	M22-Module
Type	Switch Module
Finishing	White
Highlights	Suitable for 1-Gang 20A DP Switch Cover LI901568\LI901569\LI901570\LI901571 /
	/
	/



### Installation and maintenance

Cable section admitted	4MM2
Connection terminals type	Pillar
IP protection	IP20



**Simon Electric (APAC)**

5th floor, No.1 Building, HongQiao Vanke Center, 988 Shenchang Road, Shanghai, China  
E-mail. info@simon-apac.com      [www.simon-apac.com](http://www.simon-apac.com)




Material	PC+Metal
Size Height x Width(mm)	88*86
Operating temperature range	0 - 40°C

## Additional information

Rated current	20AX
Rated voltage	250V
Indicator function	Yes
Standards	IEC 60669-1
Embedding depth (mm)	30
Contacts material	AgCdO
Poles	DOUBLE POLE
Connections - terminals	H66





## Simon M22

1-Gang 13A DP Socket with Switch

### Basic Information

Model no	LI901042
Range	M22-Module
Type	Socket Module
Finishing	White
Highlights	Suitable for 1 Gang 13A DP Socket Cover LI901572\LI901573\LI901574\LI901575 / / /



### Installation and maintenance

Cable section admitted	3.3MM2
Connection terminals type	screw catch
IP protection	IP20



Material	PC+Copper
Size Height x Width(mm)	88*86
Operating temperature range	0 - 40°C

## Additional information

Rated current	13A
Rated voltage	250V
Indicator function	No
Standards	BS 1363-2;SASO 2203
Embedding depth (mm)	30
Contacts material	AgCdO
Poles	DOUBLE POLE
Connections - terminals	Q195L





## Simon M22

1-Gang 45A DP Switch with Neon

### Basic Information

Model no	LI901043
Range	M22-Module
Type	Switch Module
Finishing	White
Highlights	Suitable for 1 Gang 45A DP Switch Cover LI901576\LI901577\LI901578\LI901579 /
	/
	/



### Installation and maintenance

Cable section admitted	6MM2
Connection terminals type	Pillar
IP protection	IP20



**Simon Electric (APAC)**

5th floor, No.1 Building, HongQiao Vanke Center, 988 Shenchang Road, Shanghai, China  
E-mail. info@simon-apac.com      [www.simon-apac.com](http://www.simon-apac.com)




Material	PC+Metal
Size Height x Width(mm)	88*86
Operating temperature range	0 - 40°C

## Additional information

Rated current	45A
Rated voltage	250V
Indicator function	Yes
Standards	IEC 60669-1
Embedding depth (mm)	32
Contacts material	AgCdO
Poles	DOUBLE POLE
Connections - terminals	H66



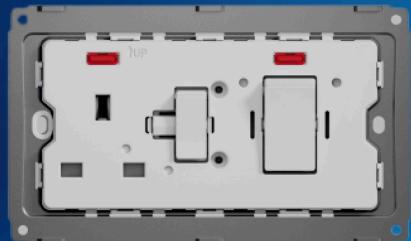

## Simon M22

1-Gang 13A DP Socket with Switch+1-

Gang 45A Switch with Neon

### Basic Information

Model no	LI901044
Range	M22-Module
Type	Socket Module
Finishing	White
Highlights	Suitable for 1 Gang 13A DP Socket+45A Switch Cover LI901580\LI901581\LI901582\LI901583 / / /

### Installation and maintenance

Cable section admitted	3.3MM2
Connection terminals type	screw catch
IP protection	IP20



Material

**PC+Metal**

Size Height x Width(mm)

**146\*86**

Operating temperature range

**0 - 40°C**

## Additional information

Rated current

**45A**

Rated voltage

**250V**

Indicator function

**Yes**

Standards

**BS 1363-2;SASO 2203;IEC 60669-1**

Embedding depth (mm)

**32**

Contacts material

**AgCdO**

Poles

**DOULE POLE**

Connections - terminals

**Q195L**



# simon

Since 1916 From Barcelona




# simon

## Simon Electric (APAC)

5th floor, No.1 Building, HongQiao Vanke Center, 988 Shenchang Road, Shanghai, China  
E-mail. [info@simon-apac.com](mailto:info@simon-apac.com) [www.simon-apac.com](http://www.simon-apac.com)

The appearance and color of all products listed in this data sheet are for reference only. Simon reserves the right to modify specification and/or discontinue any product at any time without prior notice.





## Simon M22

1-Gang 13A Socket with Switch+USB+Type C

### Basic Information

Model no	LI901045
Range	M22-Module
Type	Socket Module
Finishing	White
Highlights	Suitable for 1 Gang 13A Socket+USB+Type C Cover LI901584\LI901585\LI901586\LI901587 / / /



### Installation and maintenance

Cable section admitted	3.3MM2
Connection terminals type	screw catch
IP protection	IP20




Material	PC+Metal
Size Height x Width(mm)	88*86
Operating temperature range	0 - 40°C

## Additional information

Rated current	13A
Rated voltage	250V
Indicator function	Yes
Standards	BS 1363-2;SASO 2203;IEC/BS EN 62368-1;IEC/BS EN 62680-1-1
Embedding depth (mm)	36
Contacts material	AgCdO
Poles	DOUBLE POLE
Connections - terminals	Q195L



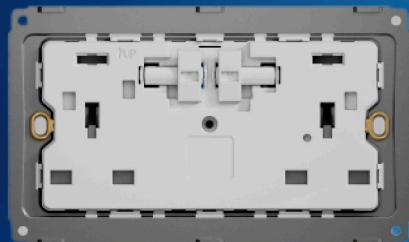


## Simon M22

2-Gang 13A DP Socket with Switch

### Basic Information

Model no	LI901046
Range	M22-Module
Type	Socket Module
Finishing	White
Highlights	Suitable for 2 Gang 13A DP Socket Cover LI901588\LI901589\LI901590\LI901591 / / /



### Installation and maintenance

Cable section admitted	3.3MM2
Connection terminals type	screw catch
IP protection	IP20




Material	PC+Metal
Size Height x Width(mm)	146*86
Operating temperature range	0 - 40°C

## Additional information

Rated current	13A
Rated voltage	250V
Indicator function	No
Standards	BS 1363-2;SASO 2203
Embedding depth (mm)	30
Contacts material	AgCdO
Poles	DOUBLE POLE
Connections - terminals	Q195L



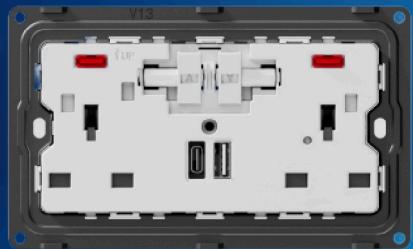


## Simon M22

2-Gang 13A Socket with Switch+USB+Type C

### Basic Information

Model no	LI901047
Range	M22-Module
Type	Socket Module
Finishing	White
Highlights	Suitable for 2 Gang 13A Socket+USB+Type C Cover LI901592\LI901593\LI901594\LI901595 /
	/
	/



### Installation and maintenance

Cable section admitted	3.3MM2
Connection terminals type	screw catch
IP protection	IP20




Material	PC+Metal
Size Height x Width(mm)	146*86
Operating temperature range	0 - 40°C

## Additional information

Rated current	13A
Rated voltage	250V
Indicator function	Yes
Standards	BS 1363-2;SASO 2203;IEC/BS EN 62368-1;IEC/BS EN 62680-1-1
Embedding depth (mm)	36
Contacts material	AgCdO
Poles	DOUBLE POLE
Connections - terminals	Q195L





## Simon M22

Satellite TV Socket

### Basic Information

Model no	LI901048
Range	M22-Module
Type	Tel, TV Data
Finishing	White
Highlights	Suitable for Satellite TV Cover LI901596\LI901597\LI901598\LI901599
	/
	/
	/



### Installation and maintenance

Cable section admitted	/
Connection terminals type	/
IP protection	IP20




Material	PC+Metal
Size Height x Width(mm)	88*86
Operating temperature range	0 - 40°C

## Additional information

Rated current	/
Rated voltage	/
Indicator function	/
Standards	BS 5733
Embedding depth (mm)	30
Contacts material	AgCdO
Poles	/
Connections - terminals	/





## Simon M22

Telephone Socket

### Basic Information

Model no	LI901049
Range	M22-Module
Type	Tel, TV Data
Finishing	White
Highlights	Suitable for Telephone Socket Cover LI901600\LI901601\LI901602\LI901603 /
	/
	/



### Installation and maintenance

Cable section admitted	/
Connection terminals type	/
IP protection	IP20




Material	PC+Metal
Size Height x Width(mm)	88*86
Operating temperature range	0 - 40°C

## Additional information

Rated current	/
Rated voltage	/
Indicator function	/
Standards	BS 5733
Embedding depth (mm)	30
Contacts material	AgCdO
Poles	/
Connections - terminals	/





## Simon M22

Data Socket

### Basic Information

Model no	LI901050
Range	M22-Module
Type	Tel, TV Data
Finishing	White
Highlights	Suitable for Data Socket Cover LI901604\LI901605\LI901606\LI901607 /
	/
	/



### Installation and maintenance

Cable section admitted	/
Connection terminals type	/
IP protection	IP20




Material	PC+Metal
Size Height x Width(mm)	88*86
Operating temperature range	0 - 40°C

## Additional information

Rated current	/
Rated voltage	/
Indicator function	/
Standards	BS 5733
Embedding depth (mm)	30
Contacts material	AgCdO
Poles	/
Connections - terminals	/





## Simon M22

Tel & Data Socket

### Basic Information

Model no	LI901051
Range	M22-Module
Type	Tel, TV Data
Finishing	White
Highlights	Suitable for Tel & Data Socket Cover LI901608\LI901609\LI901610\LI901611 /
	/
	/



### Installation and maintenance

Cable section admitted	/
Connection terminals type	/
IP protection	IP20




Material	PC+Metal
Size Height x Width(mm)	88*86
Operating temperature range	0 - 40°C

## Additional information

Rated current	/
Rated voltage	/
Indicator function	/
Standards	BS 5733
Embedding depth (mm)	30
Contacts material	AgCdO
Poles	/
Connections - terminals	/





## Simon M22

TV & Tel Socket

### Basic Information

Model no	LI901052
Range	M22-Module
Type	Tel, TV Data
Finishing	White
Highlights	Suitable for TV & Tel Socket Cover LI901612\LI901613\LI901614\LI901615 /
	/
	/



### Installation and maintenance

Cable section admitted	/
Connection terminals type	/
IP protection	IP20




Material	PC+Metal
Size Height x Width(mm)	88*86
Operating temperature range	0 - 40°C

## Additional information

Rated current	/
Rated voltage	/
Indicator function	/
Standards	BS 5733
Embedding depth (mm)	30
Contacts material	AgCdO
Poles	/
Connections - terminals	/





## Simon M22

TV & DATA Socket

### Basic Information

Model no	LI901053
Range	M22-Module
Type	Tel, TV Data
Finishing	White
Highlights	Suitable for TV & DATA Socket Cover LI901616\LI901617\LI901618\LI901619



### Installation and maintenance

Cable section admitted	/
Connection terminals type	/
IP protection	IP20



Material	PC+Metal
Size Height x Width(mm)	88*86
Operating temperature range	0 - 40°C

## Additional information

Rated current	/
Rated voltage	/
Indicator function	/
Standards	BS 5733
Embedding depth (mm)	30
Contacts material	AgCdO
Poles	/
Connections - terminals	/





## Simon M22

Light Dimmer Switch

### Basic Information

Model no	LI901054
Range	M22-Module
Type	Control
Finishing	White
Highlights	Suitable for Light Dimmer Switch Cover LI901620\LI901621\LI901622\LI901623



### Installation and maintenance

Cable section admitted	1.5MM2
Connection terminals type	Pillar
IP protection	IP20



Material	PC+Metal
Size Height x Width(mm)	88*86
Operating temperature range	0 - 40°C

## Additional information

Rated current	/
Rated voltage	/
Indicator function	No
Standards	IEC 60669-2-1
Embedding depth (mm)	30
Contacts material	AgCdO
Poles	L PORT
Connections - terminals	H66





## Simon M22

Volume Dimmer

### Basic Information

Model no	LI901055
Range	M22-Module
Type	Control
Finishing	White
Highlights	Suitable for Volume Dimmer Cover LI901624\LI901625\LI901626\LI901627 / / /



### Installation and maintenance

Cable section admitted	1.5MM2
Connection terminals type	Pillar
IP protection	IP20



Material	PC+Metal
Size Height x Width(mm)	88*86
Operating temperature range	0 - 40°C

## Additional information

Rated current	/
Rated voltage	/
Indicator function	No
Standards	IEC 60669-2-1
Embedding depth (mm)	30
Contacts material	AgCdO
Poles	L PORT
Connections - terminals	H66





## Simon M22

1-Gang PIR Motion Sensor Switch

### Basic Information

Model no	LI901056
Range	M22-Module
Type	Control
Finishing	White
Highlights	Suitable for PIR Motion Sensor Switch Cover LI901628\LI901629\LI901630\LI901631
	/
	/
	/



### Installation and maintenance

Cable section admitted	1.5MM2
Connection terminals type	Pillar
IP protection	IP20



**Simon Electric (APAC)**

5th floor, No.1 Building, HongQiao Vanke Center, 988 Shenchang Road, Shanghai, China  
E-mail. info@simon-apac.com      [www.simon-apac.com](http://www.simon-apac.com)



Material	PC+Metal
Size Height x Width(mm)	88*86
Operating temperature range	0 - 40°C

## Additional information

Rated current	/
Rated voltage	/
Indicator function	No
Standards	IEC 60669-2-1
Embedding depth (mm)	30
Contacts material	AgCdO
Poles	L PORT
Connections - terminals	H66





## Simon M22

1-Gang PIR Motion Sensor Footlight

### Basic Information

Model no	LI901057
Range	M22-Module
Type	Control
Finishing	White
Highlights	Suitable for PIR Motion Sensor Footlight Cover LI901632\LI901633\LI901634\LI901635



### Installation and maintenance

Cable section admitted	/
Connection terminals type	/
IP protection	IP20




Material	PC+Metal
Size Height x Width(mm)	88*86
Operating temperature range	0 - 40°C

## Additional information

Rated current	/
Rated voltage	/
Indicator function	/
Standards	IEC 60669-2-1
Embedding depth (mm)	30
Contacts material	AgCdO
Poles	/
Connections - terminals	/





## Simon M22

45A Cable Outlet

### Basic Information

Model no	LI901058
Range	M22-Module
Type	Control
Finishing	White
Highlights	Suitable for 45A Cable Outlet Cover LI901640\LI901641\LI901642\LI901643 / / /



### Installation and maintenance

Cable section admitted	10MM2
Connection terminals type	screw catch
IP protection	IP20




Material	PC+Metal
Size Height x Width(mm)	88*86
Operating temperature range	0 - 40°C

## Additional information

Rated current	45A
Rated voltage	250V
Indicator function	No
Standards	IEC 60670-22
Embedding depth (mm)	30
Contacts material	AgCdO
Poles	/
Connections - terminals	Q195L





## Simon M22

Shutter switch

### Basic Information

Model no	LI901059
Range	M22-Module
Type	Switch Module
Finishing	White
Highlights	Suitable for Shutter switch Cover LI901644\LI901645\LI901646\LI901647 / / /



### Installation and maintenance

Cable section admitted	2.5MM2
Connection terminals type	screw catch
IP protection	IP20




Material	PC+Metal
Size Height x Width(mm)	88*86
Operating temperature range	0 - 40°C

## Additional information

Rated current	16AX
Rated voltage	250V
Indicator function	No
Standards	IEC 60669-1
Embedding depth (mm)	30
Contacts material	AgCdO
Poles	Single Pole
Connections - terminals	Q195L





## Simon M22

2-Gang USB+Type C

### Basic Information

Model no	LI901060
Range	M22-Module
Type	Socket Module
Finishing	White
Highlights	Suitable for USB+Type C Cover LI901648\LI901649\LI901650\LI901651 /
	/
	/



### Installation and maintenance

Cable section admitted	1.5MM2
Connection terminals type	Pillar
IP protection	IP20



Material	PC+Metal
Size Height x Width(mm)	88*86
Operating temperature range	0 - 40°C

## Additional information

Rated current	65w
Rated voltage	/
Indicator function	Yes
Standards	SASO 2203;IEC/BS EN 62368-1;IEC/BS EN 62680-1-1
Embedding depth (mm)	38
Contacts material	AgCdO
Poles	LN PORT
Connections - terminals	H66





## Simon M22

2-Gang USB+HDMI

### Basic Information

Model no	LI901061
Range	M22-Module
Type	Socket Module
Finishing	White
Highlights	Suitable for USB+HDMI Cover LI901652\LI901653\LI901654\LI901655
	/
	/
	/



### Installation and maintenance

Cable section admitted	/
Connection terminals type	/
IP protection	IP20



**Simon Electric (APAC)**

5th floor, No.1 Building, HongQiao Vanke Center, 988 Shenchang Road, Shanghai, China  
E-mail. info@simon-apac.com      www.simon-apac.com



Material	PC+Metal
Size Height x Width(mm)	88*86
Operating temperature range	0 - 40°C

## Additional information

Rated current	/
Rated voltage	/
Indicator function	No
Standards	BS 5733 or IEC 62368-1
Embedding depth (mm)	30
Contacts material	AgCdO
Poles	/
Connections - terminals	/

