

Product Features



Intrinsic Safety

AI-based early warning with multi-layered fire, detection, and leakage protection ensuring cabinet-level safety



Oilfields



EV Charging
Stations



Renewable Energy
+ Energy Storage



Energy-Intensive
Industries



Simplicity & Efficiency

High energy conversion efficiency, max efficiency >91%

Plug-and-play with seamless charging post integration, up to 20 units parallel

Multiple pre-reserved interfaces for transport and installation, enabling efficient deployment



Durability & Reliability

Using Darwin's self-evolving algorithm, system temperature deviation $\leq 2.5^{\circ}\text{C}$, lifespan >12 years


Resilient to extreme conditions such as low temperature, salt spray, high heat, and sandstorms



Intelligent Operation

Real-time monitoring via AI Platform/App, AI-driven charge/discharge optimization to enhance ROI

Local and remote wireless control, one-click upgrade, fingertip dispatch, and remote O&M

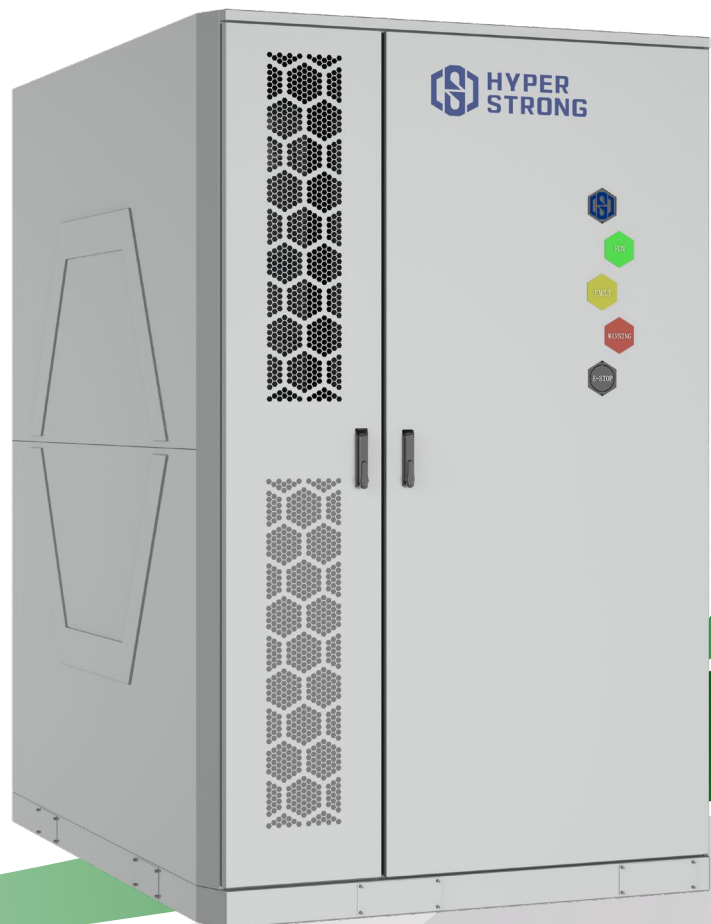

HYPERCUBEC&I II MAX

AC/DC OR DC OUTDOOR CABINET

HYPERCUBEC&I II MAX

TECHNICAL SPECIFICATIONS

Model

AC System

DC System

DC Side

Battery Type	LFP-314Ah	
Configuration	1P416S	
Rated Energy (kWh)	835.9	
Rated Voltage (V_{dc})	1331.2	
Operating Voltage Range (V_{dc})	1123.2-1497.6 (adjustable by DOD range)	

AC Side

Rated AC Power (kVA)	250/430	/
Rated AC Voltage (V_{ac})	400/690	/
AC Voltage Range (V_{ac})	-1~+1	/
Rated Frequency (Hz)	50/60	/
Maximum Efficiency	91%	/

General Parameters

Dimensions (W*D*H)	1500*2320*2400mm (± 5 mm)	
Weight (kg)	5000 $\pm$ 30	4800 $\pm$ 30
IP Rating	Battery room-IP55, Cabinet-IP54, Pack-IP67	
Operating Humidity	0~95% (non-condensing)	
Operating Temperature	-25°C~55°C (>45°C derating)	
Altitude (m)	< 4000 (>2000m derating)	
Communication Interface	CAN/Ethernet/RS485	
Cooling Method	Smart Liquid Cooling	
Fire Suppression System	Temperature sensing, smoke sensing, combustible gas detection, cabin level aerosols, ventilation system, water fire protection	
Certifications	IEC 61000, IEC 62619, IEC 63056, IEC 62477, IEC 62040, IEC 62933, IEC 60730, IEC 62040, VDE 4105&4110, UN38.3, UL9540A	