

MASTER LEDtube EM/Mains T8

MAS LEDtube STD 1200mm 14.5W840 T8 I

The Philips MASTER LEDtube integrates a LED light source into a traditional fluorescent form factor. Its unique design creates a perfectly uniform visual appearance which cannot be distinguished from traditional fluorescent. For those that are looking for value for money within limited budget and re-lamping efforts for better light effect and lifetime.

Product data

General Information				
Cap-Base	G13 [Medium Bi-Pin Fluorescent]			
Main Application	Industrial			
Nominal Lifetime (Nom)	40000 h			
Switching Cycle	50000X			
B50L70	40000 h			
Light Technical				
Color Code	840 [CCT of 4000K]			
Beam Angle (Nom)	150 °			
Luminous Flux (Nom)	1600 lm			
Luminous Flux (Rated) (Nom)	1600 lm			
Rated Beam Angle	150 °			
Correlated Color Temperature (Nom)	4000 K			
Color Consistency	<6			
Color Rendering Index (Nom)	83			
LLMF At End Of Nominal Lifetime (Nom)	70 %			

Operating and Electrical			
Input Frequency	50 to 60 Hz		
Power (Rated) (Nom)	14.5 W		
Lamp Current (Nom)	63 mA		
Starting Time (Nom)	0.5 s		
Warm Up Time to 60% Light (Nom)	instant full light s		
Power Factor (Nom)	0.9		
Voltage (Nom)	220-240 V		
Temperature			
T-Ambient (Max)	45 °C		
T-Ambient (Min)	-20 °C		
T-Storage (Max)	65 °C		
T-Storage (Min)	-40 °C		
T-Case Maximum (Nom)	45 °C		
Controls and Dimming			
Dimmable	No		

Datasheet, 2017, July 25 data subject to change

MASTER LEDtube EM/Mains T8


Mechanical and Housing				
Product Length	1200 mm			
Approval and Application				
Energy Saving Product	Yes			
Suitable For Accent Lighting	No			
Energy Efficiency Label (EEL)	A+			
Approval Marks	CE marking RoHS compliance KEMA Keur certificate			
Energy Consumption kWh/1000 h	14.5 kWh			
Product Data				
Full product code	871829179312000			

Order product name	MAS LEDtube STD 1200mm 14.5W840 T8 I			
EAN/UPC - Product	8718291793120			
Order code	929001119008			
Numerator - Quantity Per Pack	1			
Numerator - Packs per outer box	10			
Material Nr. (12NC)	929001119008			
Net Weight (Piece)	0.270 kg			

Warnings and Safety


• NOTES: The overall energy efficiency and light distribution of any installation that uses these lamps are determined by the design of the installation.


Dimensional drawing

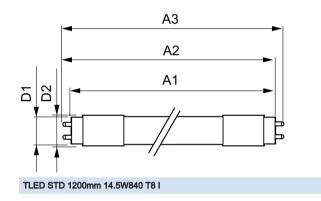


Product	D1	D2	A1	A2	A3
MAS LEDtube STD	25.68 mm	28 mm	1198.0 mm	1205.0 mm	1212.0 mm
1200mm 14.5W840 T8 I					

Photometric data





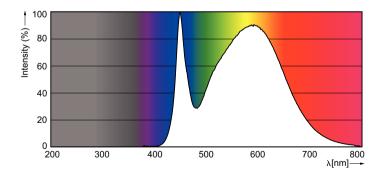

STD 1200 mm 14.5 W /840 T8 I

MASTER LEDtube EM/Mains T8

