

Pureline SP680P

SP680P LED68S 4000 PSU WH L240 S1

The PureLine family of luminaires gives you compromise-free office illumination. It is a perfect solution for office application and general indoor area lighting. The range brings together high-flux lighting with a homogeneous optical system without making any concessions on energy efficiency design.

Product data

General Information		Approval and Application	
Light source color	840 neutral white	Ingress protection code	IP20 [Finger-protected]
Luminaire light beam spread	110°	Mech. impact protection code	IK02 [0.2 J standard]
Control interface	-	Surge Protection (Common/Differential)	2.5 kV
Protection class IEC	Safety class I	Initial Performance (IEC Compliant)	
Material	Aluminum	Init. Corr. Color Temperature	4000 K
Operating and Electrical		Init. Color Rendering Index	>80
Input Voltage	220-240 V	Initial input power	64 W
Input Frequency	50 Hz	Power consumption tolerance	+/-10%
Power Factor (Min)	0.9	Over Time Performance (IEC Compliant)	
Controls and Dimming		Median useful life L70B50	50000 h
Dimmable	No	Application Conditions	
Mechanical and Housing		Ambient temperature range	0 to +45 °C
Housing Material	Aluminum extruded	Product Data	
Overall length	2282 mm	Order product name	SP680P LED68S 4000 PSU WH L240 S1
Overall width	150 mm	Order code	919515811517
Overall height	43 mm	Numerator - Quantity Per Pack	1
		Numerator - Packs per outer box	1

Pureline SP680P

Material Nr. (12NC)	919515811517
Net Weight (Piece)	5.000 kg



Warnings and Safety


- Meant for use in Indoor environment only

Dimensional drawing

Product: Pureline Suspended
Type: SP680
Application: Indoor

Product

SP680P LED68S 4000 PSU WH L240 S1

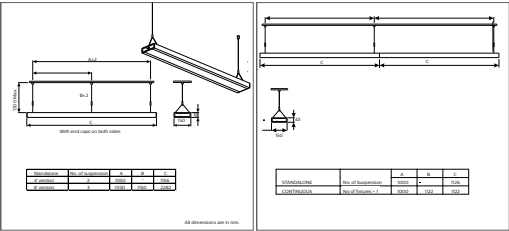

IN9002SUS - Suspended luminaires

