



Connection / Verbindung		Bipolar / Bipolar
Specification / Spezifikation		
Amps / Strom		2.10
Resistance / Widerstand(Ohms)@25°C		1.60±10%
Inductance / Induktivität(mH)@1KHz		3.00±20%
Holding torque / Haltemoment(Nm)[lb-in]		0.65[5.75]
Step angle / Schrittwinkel(°)		1.80
Step accuracy / Schritt genauigkeit		±5.00%
Rotor inertia / Rotorträgheit(g-cm²)		148.00
Weight / Gewicht(Kg)[lb]		0.50[1.10]
Temperature rise / Temperaturanstieg: MAX.80°C		
Ambient temperature / Umgebungstemperatur -10°C~50°C[14°F~122°F]		
Insulation resistance / Isolationswiderstand 100 Mohm		
Insulation class / Isolationsklasse B 130°C[266°F]		
Dielectric strength 500VAC for 1min / Spannungsfestigkeit 500 VAC für 1 minute		
Ambient humidity / Luftfeuchtigkeit MAX.85% (No condensation / Keine kondensation)		

Type of connection / Art der verbindung		Motor / Motor	
Pin NO / Pin-Nr	Bipolar / Bipolar	Leads / Leitung	Winding / Wicklung
1	A —	BLK/schwarz	A 
2	A\ —	GRN/Grün	A\ 
3	B —	RED/Rot	B 
4	B\ —	BLU/Blau	B\ 

Step / Schritt	A	B	A\ B\		
1	+	+	-	↓	↑
2	-	+	+		
3	-	-	+		
4	+	-	-		
				CW	CCW

STEPPERONLINE®

STEPPERONLINE®

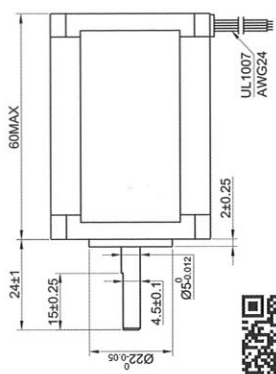



www.omic-stepperonline.com

17HS24-2104S

59495 DWG NO. 17HM08-1204S MODEL NO.

CUSTOMER'S MODEL: NO MODEL
END COVER COLOR: BLACK

REV.	REVISION RECORD	BY	DATE
0	ORIGIN	LDJ	5.25.2023



SPECIFICATION	CONNECTION	BIPOLAR
AMPS/PHASE		1.20
RESISTANCE/PHASE(Ohms)@25°C		3.00±10%
INDUCTANCE/PHASE(mH)@1KHz		3.00±20%
HOLDING TORQUE(Nm)[lb-in]		0.11[0.95]
STEP ANGLE(°)		0.90
STEP ACCURACY(NON-ACCUM)		±5.00%
ROTOR INERTIA(g-cm²)		14.00
WEIGHT(Kg)[lb]		—
AMBIENT TEMPERATURE		-10°C-50°C[14°F-122°F]
INSULATION CLASS		B 130°C[266°F]
TEMPERATURE RISE		MAX.80°C

COMMENT:
1.DYNAMIC AXIAL LOAD: 10N MAX
2.DYNAMIC RADIAL LOAD @ SHAFT LENGTH 20mm: 21N MAX
3.TMBF 6000h OR MORE @ 24V/300RPM
4.INSULATION RESISTANCE
(NORMAL TEMPERATURE AND HUMIDITY): 100 Mohm
5.DIELECTRIC STRENGTH 500VAC FOR 1MIN.(BETWEEN THE MOTOR COILS AND THE MOTOR CASE)

STEP	A+	B+	A-	B-
1	+	+	-	-
2	-	+	+	-
3	-	-	+	+
4	+	-	-	+

FULL STEP 2 PHASE-EX, WHEN FACING MOUNTING END (X)	CCW	CW
↓	↑	↓
↑	↓	↑

DIMENSIONS ARE IN MILLIMETERS.	
TOLERANCES AS BELOW:	ANGLES
DECIMALS	±2°
X ±0.5	
XX ±0.25	
XXX ±0.13	
THIRD ANGLE PROJECTION	

MOTOR CONNECTION			
PIN NO	BIPOLAR	LEADS	WINDING
1	A+	BLK	A+
2	A-	GRN	A-
3	B+	RED	B+
4	B-	BLU	B-

STEPPERONLINE®

STEPPER MOTOR

17HM08-1204S

SIGNATURE		DATE
DRN	LDJ	5.25.2023
APVD	-	-

REV.	0	SCALE	1:1	DWG NO.	A0495
------	---	-------	-----	---------	-------