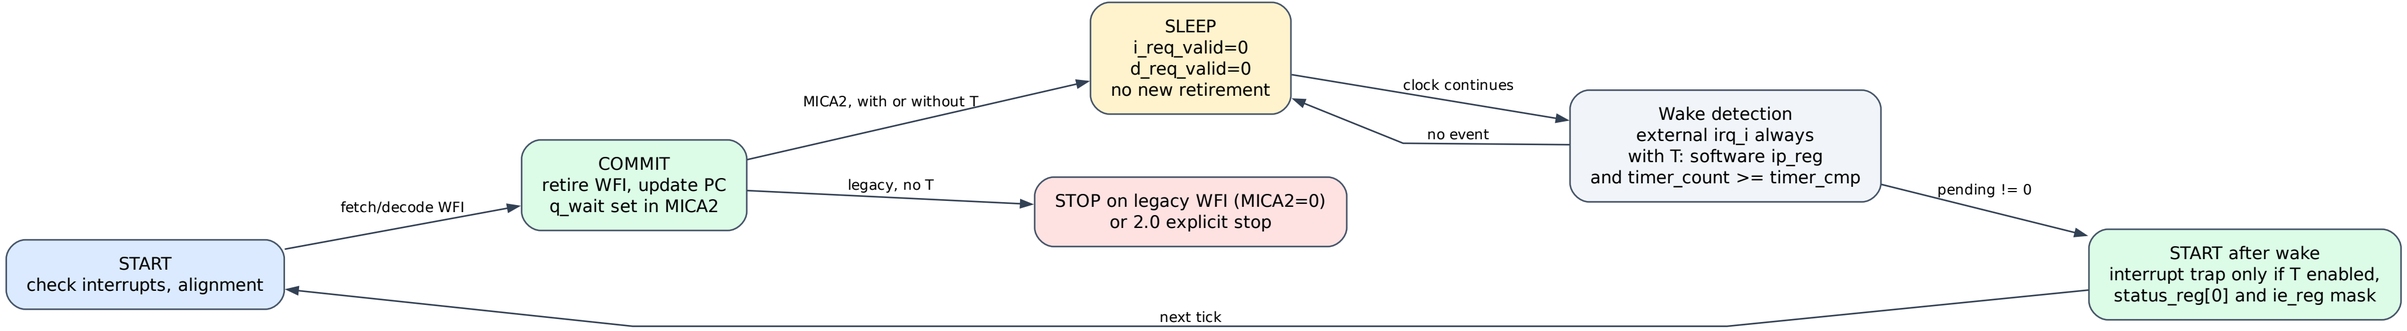
MICA 2.0 | wakeable WFI and terminal STOP
START
check interrupts, alignment
fetch/decode WFI
COMMIT
retire WFI, update PC
q_wait set in MICA2
MICA2, with or without T
SLEEP
i_req_valid=0
d_req_valid=0
no new retirement
clock continues
Wake detection
external irq_i always
with T: software ip_reg
and timer_count >= timer_cmp
no event
pending != 0
START after wake
interrupt trap only if T enabled,
status_reg[0] and ie_reg mask
legacy, no T
STOP on legacy WFI (MICA2=0)
or 2.0 explicit stop
next tick