



File: ESP32-HalfSiding.sch		
Sheet: /		
Title:		
Size: A4	Date: 9 apr 2019	Rev:
KiCad E.D.A.		Id: 1/6


Use only one of U1 or U2, not both.
U2 is the older through hole part
and U1 is the newer SMD part.

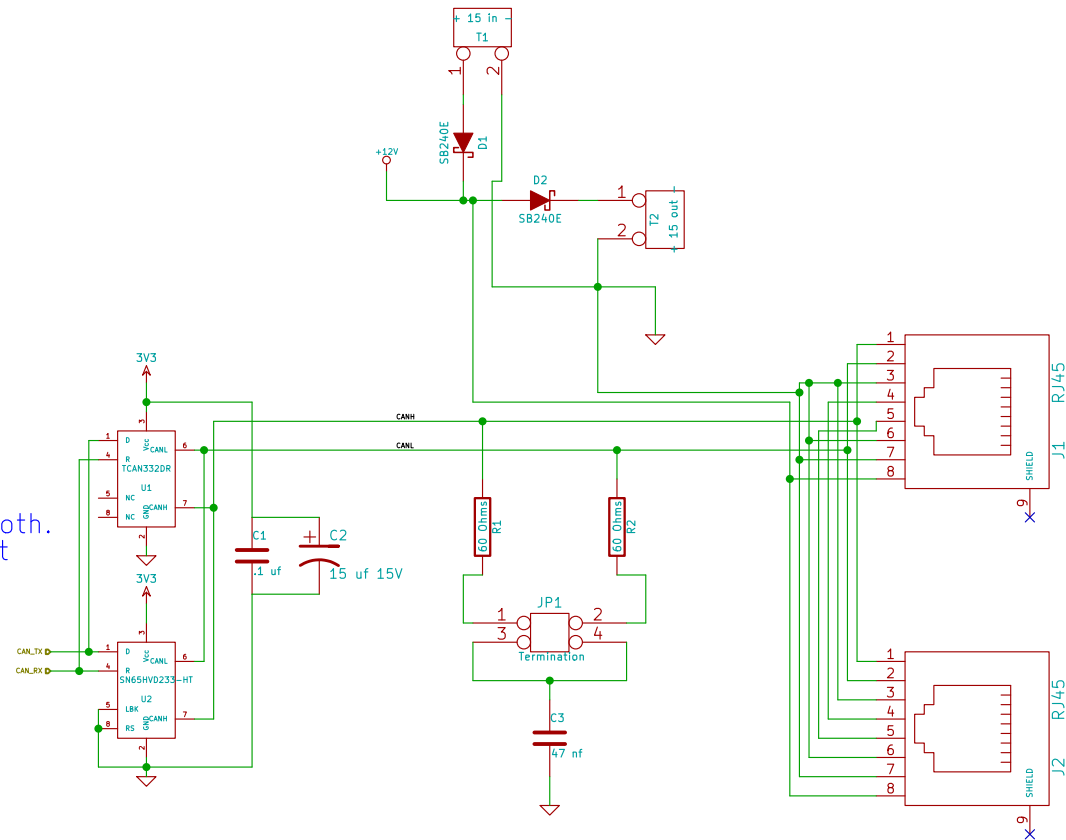


File: CAN_Transceiver.sch		
Sheet: /CAN Transceiver/		
Title:		
Size: A4	Date: 9 apr 2019	Rev:
KiCad E.D.A.		Id: 2/6

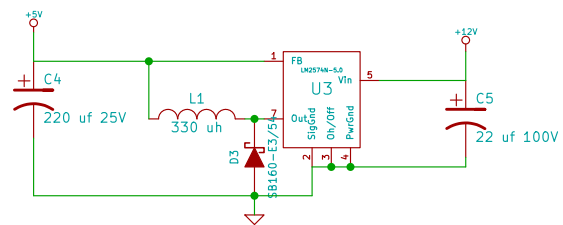


File: PowerSupply.sch		
Sheet: /Power Supply/		
Title:		
Size: A4	Date: 9 apr 2019	Rev:
KiCad E.D.A.		Id: 3/6

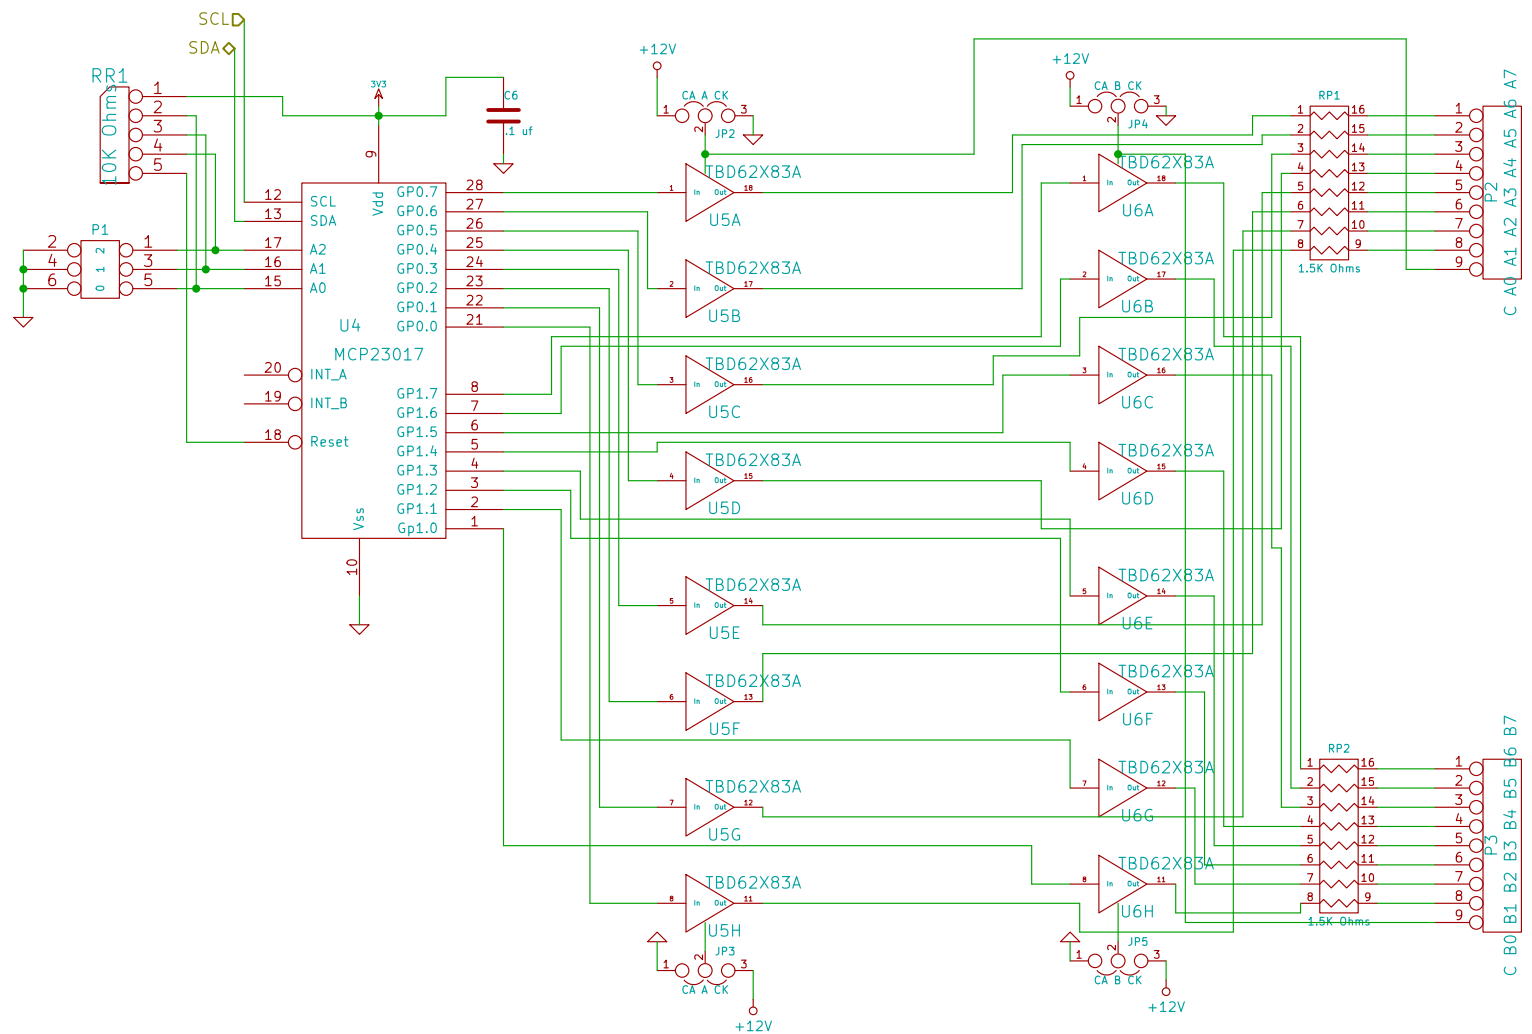

File: drivers.sch		
Sheet: /Drivers/		
Title:		
Size: A4	Date: 9 apr 2019	Rev:
KiCad E.D.A.		Id: 4/6

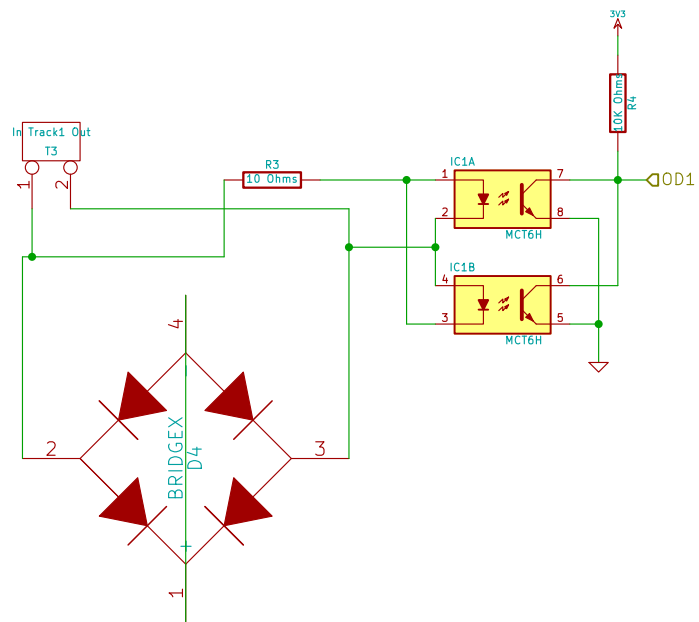

File: OD1.sch		
Sheet: /Occupancy Detector 1/		
Title:		
Size: A4	Date: 9 apr 2019	Rev:
KiCad E.D.A.		Id: 5/6

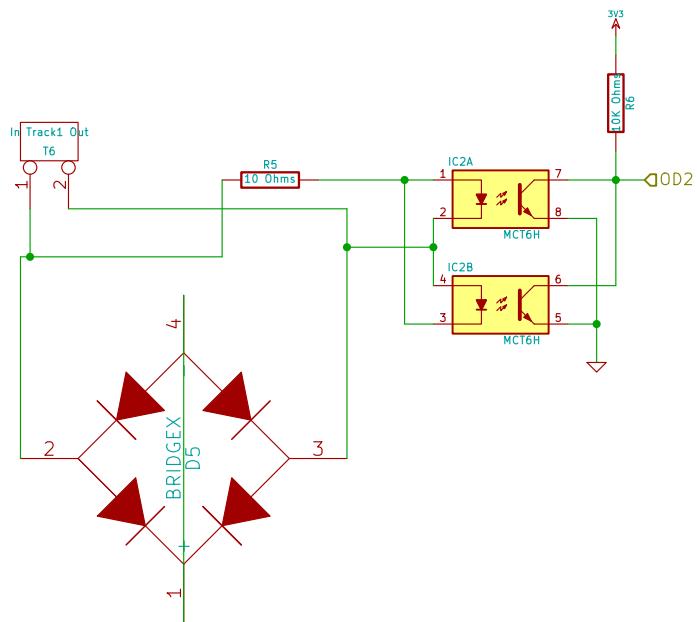

File: OD2.sch		
Sheet: /Occupancy Detector 2/		
Title:		
Size: A4	Date: 9 apr 2019	Rev:
KiCad E.D.A.		Id: 6/6