System requirements

SR-05 15-year life, at least 9 round trips
SR-07 1.46 N at 2,100 s
SR-08 3,400 kg of usable xenon
SR-09 2,550 kg of xenon replenished per trip
SR-10 22.8 t of xenon over life
SR-11 25 kW to the thrusters at end of life
SR-12 Platform powered through 2.5 h eclipses
SR-13 Performance after the life dose
SR-14 Autonomous rendezvous and capture
SR-15 Dock only after approach clearance
SR-16 One standard docking interface
SR-17 Cargo release velocity
SR-22 Propellant reserve for disposal
SR-25 Cargo and module captured as one stack

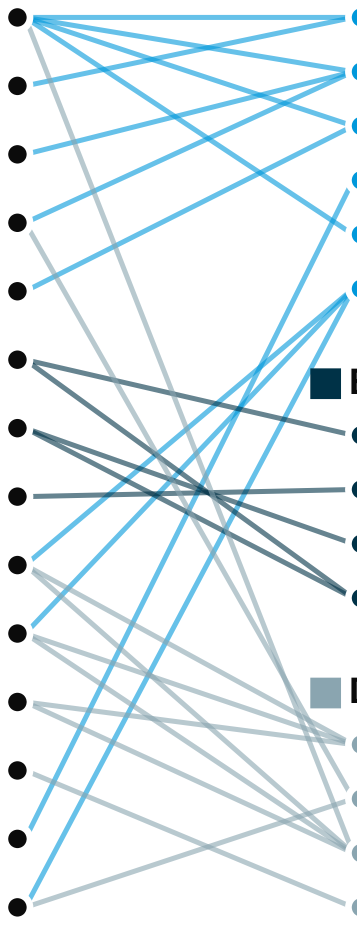

Electric propulsion (PROP)

PROP-01 1.46 N with one thruster failed
PROP-02 3,400 kg xenon, 9 refills
PROP-03 90,000 h of thrusting over life
PROP-04 Disposal reserve (TBD)
PROP-05 Exchangeable module of 0.4 t or less
PROP-06 Proximity thrust for capture

Electrical power (PWR)

PWR-01 25 kW to the PPUs plus 2 kW platform
PWR-02 Array sized for the life dose
PWR-03 2.5 h eclipse at 60 % DoD, 8.8 kWh
PWR-04 29.1 kW array at end of life

Docking and refuelling interface (DRI)

DRI-01 One androgynous docking port
DRI-02 2,550 kg of xenon in 21 days
DRI-03 At least 54 mating cycles
DRI-04 Release velocity (TBD)