



# AS5047P Magnetic Encoder

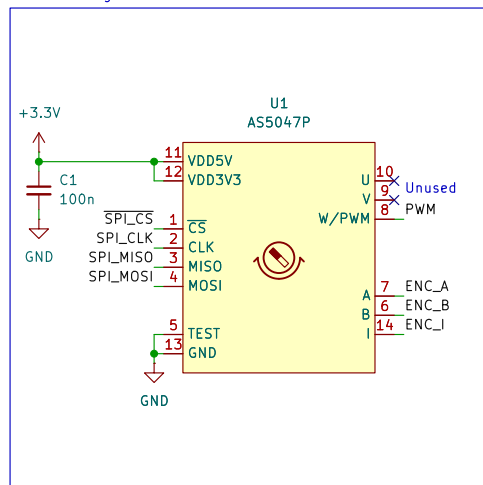

# Breakout Pinouts

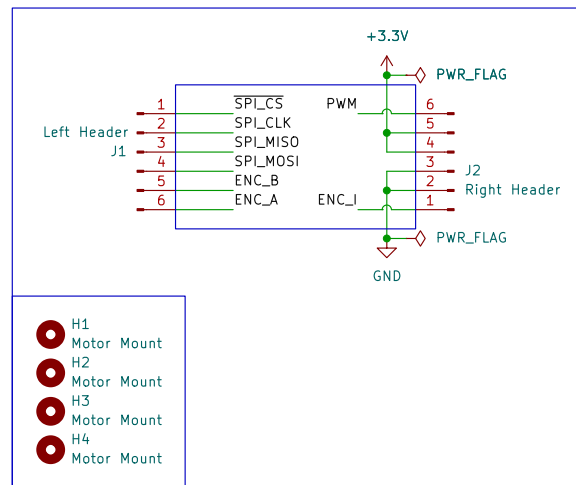

## Notes:

Make sure to use Diametric magnets.  
Recommended DigiKey 469-1024-ND.

Magnet must be centered to middle of package.

Non-Volatile memory can only be burned ONCE.

Pull all SPI pins low when not in use

Default settings are:

- ABI Decimal Mode @ 4000 steps/rev
- W is PWM Output

Aiden Lee

**RoboJackets**

Sheet: /

File: breakout-AS5047P.kicad\_sch

**Title: AS5047P Breakout**

Size: A5

Date: 2026-05-01

KiCad E.D.A. 10.0.1

**Rev: v1.1**

Id: 1/1