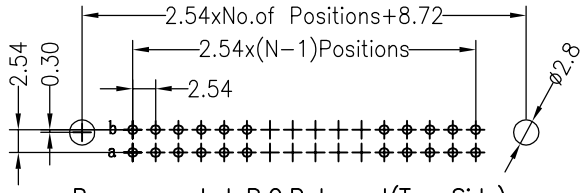
HSF RoHS

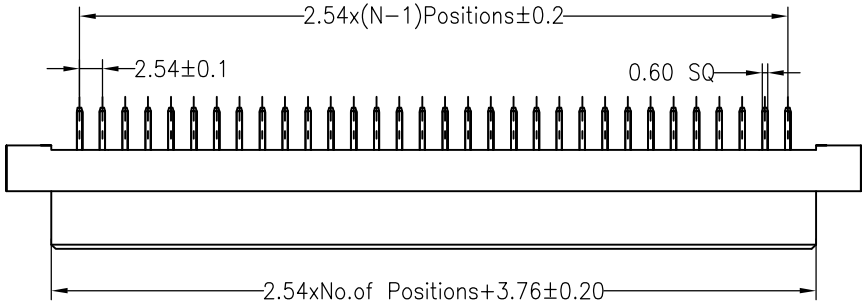
FILE NO :E362810


SPECIFICATIONS
Rated Current:3.0AMP
Contact Resistance:30mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°C to +105°C

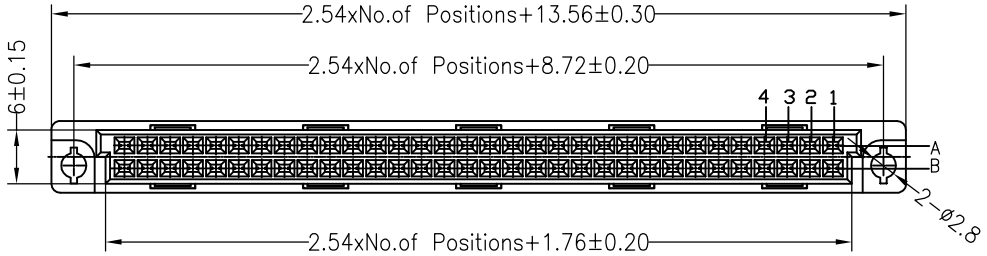
Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PBT
Max.Processing Temp: 180°C for 30−60 seconds
(200°C for 10 seconds)

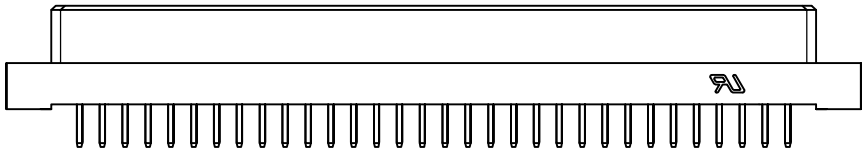



Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)



## *Ordering Information*

**35112 XX B F S XX BNA1**

| No.of Pins |
|---|
| 210 |
| 216 |
| 220 |
| 232 |
| 244 |
| 248 |
| 250 |
| 264 |

Contact Type
F=Female

| Contact Plating |
|---|
| G0:Gold Flash |
| S0:Gold Flash/Tin |
| S1:2U" Gold/Tin |
| S2:5U" Gold/Tin |
| S3:10U" Gold/Tin |
| S4:15U" Gold/Tin |
| S5:30U" Gold/Tin |
| SN:Tin |

| Dimension antitheses list | |
|---|---|
| ITEM | A |
| Standard | 4.00 |
| Alternate | |

| REV | DATE | MODIFICATION DESCRIPTION | CHANGE |
|---|---|---|---|
| A0 | 2015.04.06 | NEW DRAWING | |

| OPERATION | | DRAW | YiYuSheng | 15.04.06 |
|---|---|---|---|---|
| X.X | ±0.30 | | | |
| X.XX | ±0.20 | CHECK | | |
| X.XXX | ±0.10 | | | |
| Angle | ±3° | APPROVE | | |
| DIM | TOL | | | |

| SCALE | FIT |
|---|---|
| UNIT | mm |
| SIZE | A4 |
| SHEET | 1/1 |
| PROJ. | |


JiLN® 深圳市锦凌电子有限公司
SHENZHEN JINLING ELECTRONIC CO.,LTD
Tel：86-755-2997-5806/5802 Fax：86-755-2997-5992


| PART NO. | 35112XXBFSXXBNA1 |
|---|---|
| TITLE: | DIN 41612 180° 2xNPIN Female |