

COCONUT-FIBRE SHADE SAILS

Included with your order

Installation Guide

The complete manual for installing your coconut-fibre shade sail, step by step — over a structure or as a tensioned sail.

98% natural fibre

80% shade coverage

Heart thimbles included



WELCOME

Thank you for your trust

You are holding a shade sail made of natural coconut fibre. Properly installed, it gives you soft, breathable shade for many seasons to come. This manual guides you from the first measurement to the final tensioning — whatever your setup.

IN THIS MANUAL

01	Your sail in detail	p.3
02	Heart thimbles, reinforcements & sizes	p.4
03	Before you start	p.5
04	Method A — Over a structure	p.6
05	Method B — As a tensioned sail	p.9
06	Getting the tension right	p.12
07	Care & longevity	p.13
08	Frequently asked questions	p.14
09	Need help?	p.15

INCLUDED WITH YOUR SAIL

Crimped heart thimbles

A semi-oval metal loop at every corner and end point — your sturdy anchor point.

Sewn-in reinforcements

Reinforced stitching on every tension zone, already built into the sail.

Coconut-fibre rope — optional

The ideal accessory for fixing and tensioning, with a 100% natural finish.

YOUR SAIL IN DETAIL

A natural fibre, authentic shade

Natural
Coconut fibre

750 g/m²
Density

80%
Shade coverage

Resistant
To moisture & water





Tissage naturel
Des fibres extraites du cocotier, tissées serrées pour un ombrage dense mais respirant — l'air circule, la chaleur ne stagne pas.



Un rendu chaleureux
Sa teinte miel et sa matière vivante habillent naturellement pergolas et terrasses, sans l'aspect synthétique d'une toile plastifiée.

Natural weave
Fibres extracted from the coconut tree, tightly woven for dense yet breathable shade — air circulates and heat doesn't build up.

A warm look
Its honey tone and natural texture dress pergolas and terraces beautifully, without the synthetic look of a plasticised sail.

HEART THIMBLES, REINFORCEMENTS & SIZES

The key points of fixing



The heart thimble

A semi-oval metal loop crimped at every corner and end point. The rope passes through it: it spreads the tension and protects the sail.

You always fix the sail using the heart thimbles.



The sail reinforcement

Reinforced stitching on the tension zones (diagonals and edges). It stiffens the sail and channels the strain towards the heart thimbles.

Keep the reinforcement facing upward.

HEART THIMBLES AND REINFORCEMENTS

Heart thimble diameter shown in the top right corner of each model

SMALL SQUARE

Ø5cm

2x2 m · 3x3 m

SQUARE

Ø9cm

3,5x3,5 m

LARGE SQUARE

Ø9cm

4x4 m

SMALL RECTANGLE

Ø5cm

2x3 m

RECTANGLE

Ø9cm

2x4 · 2x5 · 2x6 · 3x4 · 3x5 · 3x6 m

LARGE RECTANGLE

Ø9cm

4x5 m · 4x6 m

LONG RECTANGLE

Ø9cm

3x7 m

- Natural fibre

Rot-proof

750 g/m²

80% shade coverage

DEPENDING ON YOUR SIZE. The number of heart thimbles varies. Smaller sizes have 4 heart thimbles (one per corner); larger sizes and rectangles have 6 to 8, with intermediate reinforcements. The heart thimble diameter (Ø 5 or 9 cm) is shown in the top right corner of each model.

BEFORE YOU START

A few minutes of preparation

A successful installation comes down to two things above all: solid anchor points and a correctly oriented sail. Take your time with this step, and the rest will follow easily.

HANDY TOOLS

- ✓ A tape measure to measure the area and the diagonals.
- ✓ A stable stepladder for fixings up high.
- ✓ Fixings suited to your surface (wall plugs for masonry, hooks or rings for wood, a post for a freestanding point).
- ✓ Coconut-fibre rope (or turnbuckles) to connect and tension the sail.

CHOOSE YOUR METHOD

A — Over a structure

Pergola, wooden structure or wall already in place.

→ page 6

B — As a tensioned sail

Between 4 anchor points (wall, post, mast, sturdy tree).

→ page 9

THE GOLDEN RULE

Reinforcement facing up

Always orient the reinforcement stitching upward: this is how the sail is designed to work.

Gradual tensioning

Tighten each corner a little at a time, working evenly around the sail — never one side at a time.


SAFETY. Check that each anchor point can genuinely withstand the tension of the sail (especially in wind). If you're unsure about a support, reinforce it before installing.

Method A — Over a structure

Pergola, wooden structure or wall

The most straightforward setup: measure, lay out the sail, then connect the heart thimbles to your anchor points with the coconut rope.

1 Measure your area

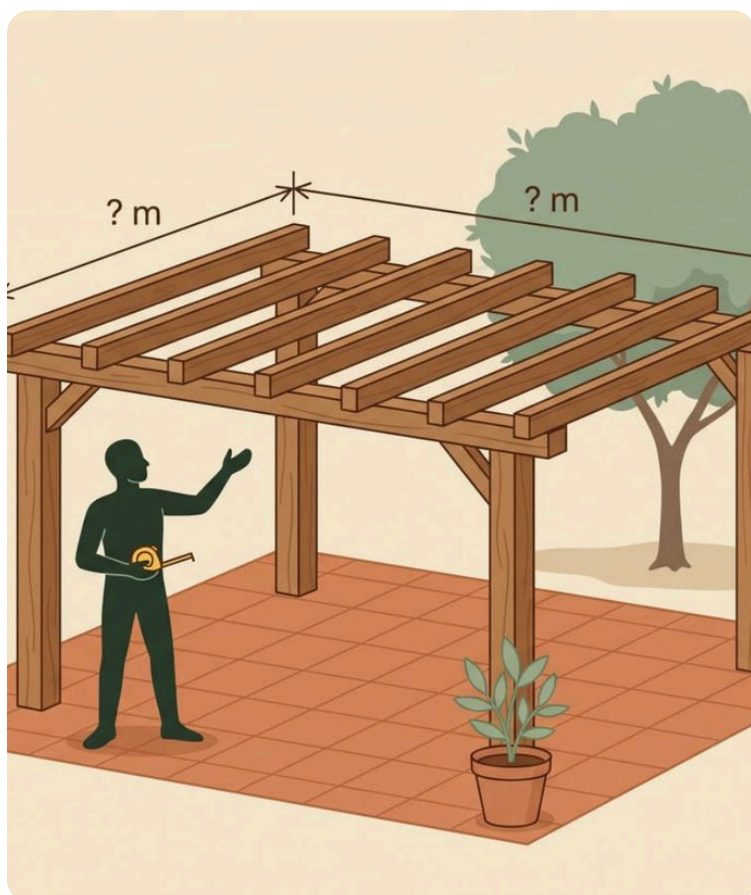



- 1 Measure the area to be shaded, length x width, at the height of your fixings (rafters, posts, wall).
- 2 Choose the sail size closest to your area from our range.
- 3 Leave a margin between the sail and the supports so you can tension it.

TIP. Not sure about the size? Our customer service team can advise you before you order:
contact@zephyrosc.com

GOOD PRACTICE. It's better to choose a sail slightly smaller than the area: the margin will let you tension it properly.

2 Prepare the area and the sail

Lay the sail flat to identify its orientation and the direction of the reinforcements, then hold it up under the structure.

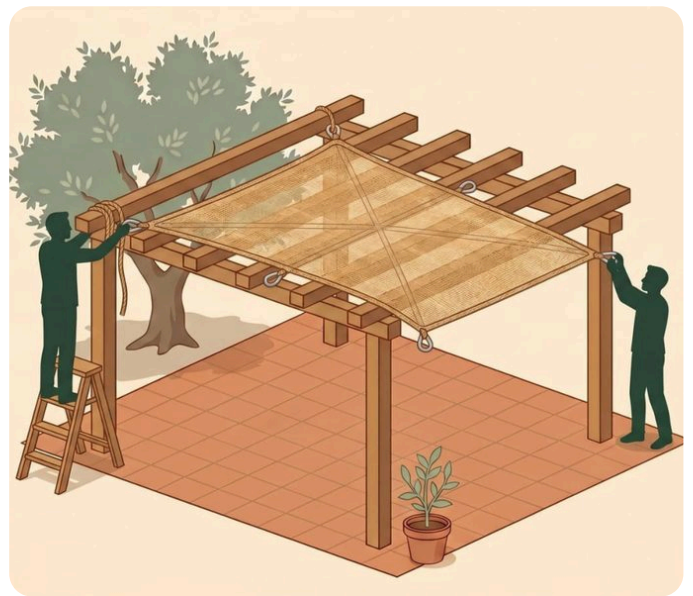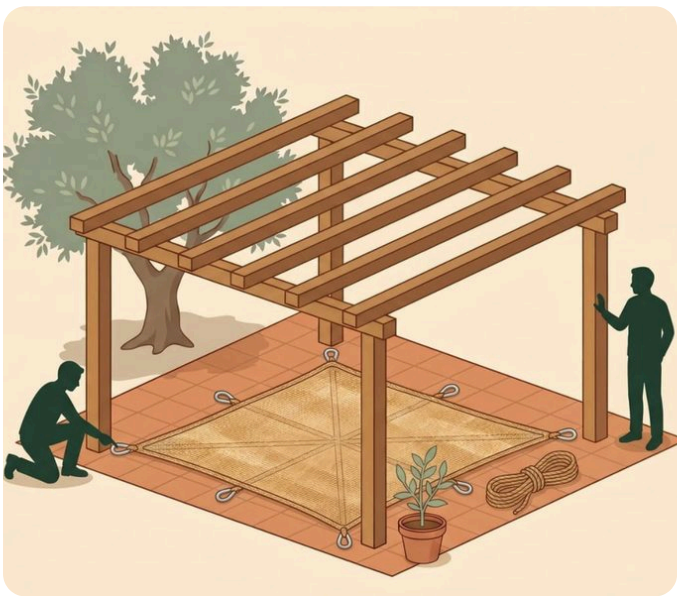

- 1 Spread the sail out on the ground to identify the corner loops and their heart thimbles.
- 2 Locate the reinforcement lines (diagonals) that structure the sail.
- 3 Hold the sail up under the structure and check the orientation before fixing it.

IMPORTANT. Always orient the sail's reinforcement upward. This is what allows it to work correctly once tensioned.

TO CHECK. Each anchor point must be able to withstand the tension — test its strength before continuing.

3 Connect the loops and fix in place



- 1 Thread the coconut rope through each heart thimble, then tie it to your anchor point (rafter, post, wall ring).
- 2 Connect the corners first, then tension gradually and evenly.
- 3 Check that the reinforcements stay facing upward and that the sail sits evenly.

TIP. The greater the distance between the sail and the anchor, the more the reinforcement alignment matters.

AND THERE YOU HAVE IT. Your sail is installed. Time to enjoy the shade! See page 12 to perfect the tension.

☒ Method B — As a tensioned sail

Between 4 anchor points

No structure? Tension your sail between four sturdy supports — wall, post, mast or a solid tree. The heart thimbles and coconut rope ensure a secure fixing.

1 Identify your 4 anchor points



- 1 Wall or facade — often 2 points on the terrace side, with fixings suited to the surface.
- 2 Post, mast, sturdy tree or railing — for the opposite points.

TO CHECK. Each anchor must withstand strong tension. A post must be firmly set in the ground, and a tree sturdy enough.

2 Measure and allow a margin



- 1 Measure the distance between your 4 anchor points and the diagonals.
- 2 Choose a sail slightly smaller than the area: the margin will be used for tensioning.
- 3 If in doubt between two sizes, choose the smaller one.

TIP. A sail that's too large is difficult to tension correctly and may sag in the centre.

GUIDE. Work out the length of coconut rope needed at each corner to connect the heart thimble to its anchor.

3 Tension using the heart thimbles



- 1 Connect each heart thimble to its anchor with the coconut-fibre rope.
- 2 Start with light tension on all the corners, then adjust gradually.
- 3 The sail should be held firmly without being pulled to its limit, reinforcement facing upward.

GOOD TO KNOW. Coconut fibre responds to moisture: after the first rains, re-tension it slightly while it settles.

GETTING THE TENSION RIGHT

The technique that changes everything

A well-tensioned sail looks better, stays stable and lasts longer. Three simple principles are all it takes.

1. Reinforcement always facing up

The reinforcement stitching (the diagonals) should face the sky. This is the orientation the sail was designed for: it stays flat and works without deforming.

2. Even tension, corner by corner

Tighten each heart thimble a little at a time, rather than finishing one side before the other. The sail settles evenly, with no creases or slack areas.

3. Taut, but not to the extreme

The sail should feel firm to the touch, without being pulled as tight as a rope. A little give allows it to absorb changes in humidity and gusts of wind.

IN STRONG WIND. A shade sail is not a windbreak. If strong gusts are forecast, loosen or remove the sail to protect the installation and your anchor points.

CARE & LONGEVITY

A natural material, easy to live with

Coconut fibre is natural and resistant to moisture and water. A few simple habits keep it looking good season after season.

After the first rains

The fibre responds to moisture: it may loosen slightly before settling. Gently re-tension the heart thimbles over the first few weeks.

Resistant to moisture and water

Coconut fibre does not rot: it withstands moisture and bad weather without deteriorating the way a more delicate fibre would.

Gentle cleaning

A light dry brush or a rinse with clean water is enough. Avoid high-pressure washers and harsh chemical products.

Winter storage recommended

We strongly recommend it: at the end of the season, take the sail down, let it dry, then store it somewhere sheltered. This protects the fibre and significantly extends its lifespan.

NATURAL. A few stray fibres, slight variations in tone: these are signs of a 100% natural material, not a defect.

FREQUENTLY ASKED QUESTIONS

You may be wondering...

Q. My sail has loosened slightly after the rain — is that normal?

Yes. Coconut fibre responds to moisture. Re-tension it slightly using the heart thimbles: it settles down after a few cycles.

Q. Which size should I choose?

A sail slightly smaller than the area to be covered. The remaining margin lets you tension it neatly between your anchor points.

Q. Can I cut the sail to size?

No. Cutting it removes the reinforcements and heart thimbles, which are essential for it to hold. Choose the best-fitting size instead.

Q. How many heart thimbles does my sail have?

From 4 (smaller sizes) to 8 (larger sizes and rectangles). See page 4 for the details by model.

Q. How do I fix it to a wall?

With fixings suited to the surface (wall plugs and plates/rings). Then connect the heart thimble to the anchor with the coconut rope.

Q. Is the coconut rope included?

It's available as an accessory (see page 15). You can also use turnbuckles suited to your anchor points.

Q. Should I take it down for winter?

Yes, we strongly recommend it. Bringing the sail indoors over winter protects the fibre and significantly extends its lifespan.

Q. What about strong wind?

Loosen or remove the sail if strong gusts are forecast: a shade sail is not designed to withstand strong wind.

Have a question that's not here? Email us at contact@zephyrosc.com — we're happy to help.

NEED HELP?

We're here for you

Customer service

A question about installation or sizing? Email us and an advisor will get back to you.

contact@zephyrosc.com

30-day money-back guarantee

Returns accepted within 30 days, subject to the store's terms.

Tracked delivery

Dispatched within 48 to 72 business hours, subject to the delivery times shown.

THE ACCESSORY THAT MAKES INSTALLATION EASIER



Coconut-fibre rope

For connecting the heart thimbles to your anchor points and tensioning the sail, with a matching 100% natural finish.

NATURAL FINISH · AVAILABLE IN STORE

Enjoy the season under your sail!

Thank you for choosing natural, breathable and long-lasting shade.

zephyrosc.com · contact@zephyrosc.com



Scan to find this guide online, in your language