
DIRECT-WIRED ASSEMBLY / REV 0.4

Display: 5V power, 3.3V logic. Shared SPI0; separate LCD and touch chip selects.

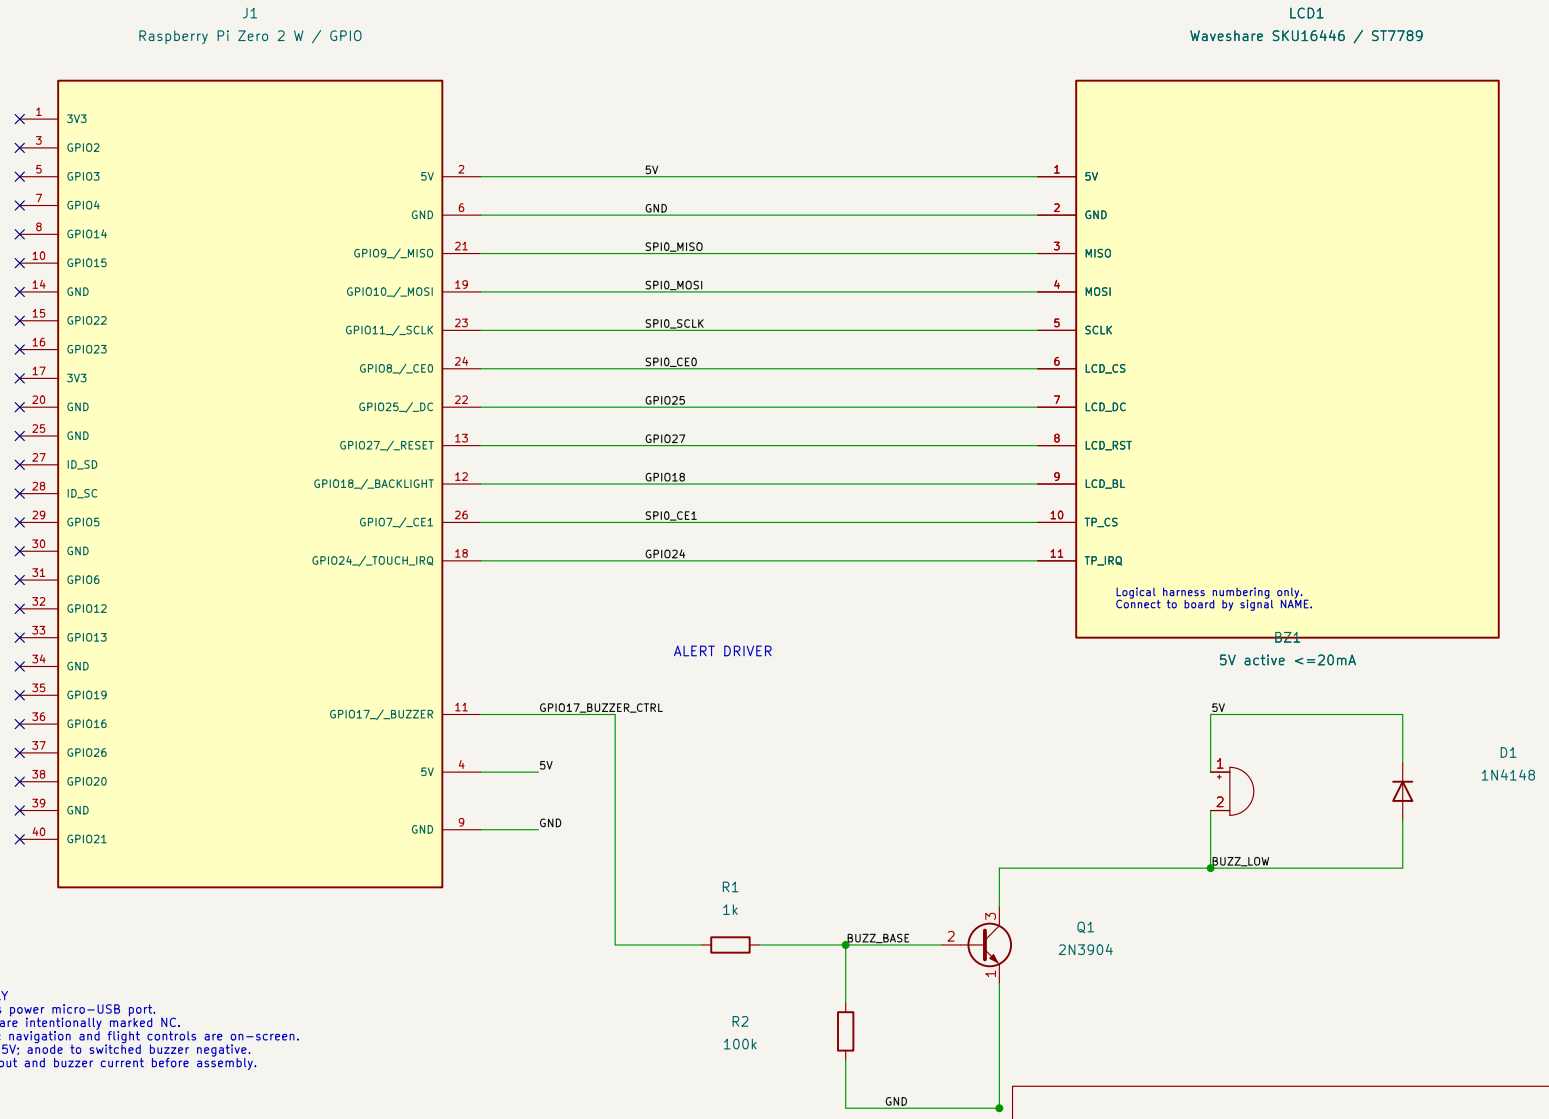

POWER AND ASSEMBLY
Supply Pi through its power micro-USB port.
Unused header pins are intentionally marked NC.
No physical controls: navigation and flight controls are on-screen.
D1 cathode (bar) to 5V; anode to switched buzzer negative.
Verify Q1 E/B/C pinout and buzzer current before assembly.

No custom PCB or Gerbers. See wiring.csv and production/BUILD.md.

Sheet: /		
File: LAUNCHPAD.kicad_sch		
Title: LAUNCHPAD — Display and Alert Circuit		
Size: A4	Date: 2026-11-07	**Rev: 0.4**
KiCad E.D.A. 10.0.6		Id: 1/1