


CDisplay.h File Reference

```
#include <sys/slog.h>
```

```
#include <sys/slogcodes.h>
```

Include dependency graph for CDisplay.h:

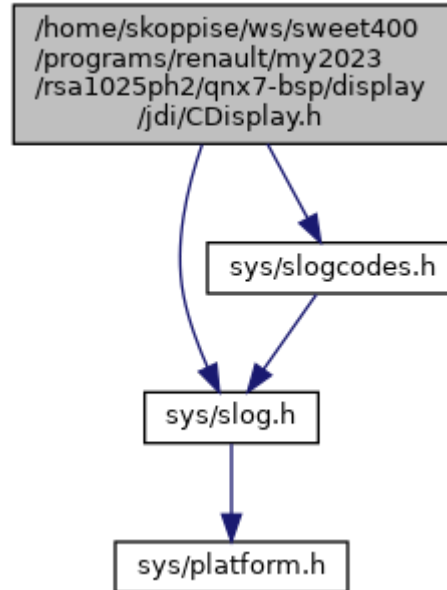

[Go to the source code of this file.](#)

Macros

```
#define MIN_DELAY_DISPLAY_EPOWER_ON 10 /*delay 10 us Set_Display_State on */
```

```
#define DO_RESET_TFT 1U
```

```
#define DO_STANDBY_MODE_TFT
```

```
#define DI_TFT_BL_FAULT 0U
```

```
#define DI_TFT_FAIL 8U
```

```
#define MAX_POWER_STATUS_LEN 4U
```

```
#define DISPLAY_STATE_ON "ON"
```

```
#define DISPLAY_STATE_OFF "OFF"
```

```
#define DISPLAY_STATE_DISCONNECTED "DISCONNECTED"
```

```
#define DISPLAY_STATE_ERROR "ERROR"
```

```
#define MIN_DELAY_DISPLAY_ON_MS 120
```

```
#define MIN_DELAY_DISPLAY_OFF_MS 100
```

```
#define DISPLAYSERVICE_MAX_DISPLAY_COUNT 1
```

```
#define MIN_DELAY_ERROR_PIN_READ 166
```

```
#define MIN_DELAY_RST_STBY 30
```

Macro Definition Documentation

◆ DI_TFT_BL_FAULT

```
#define DI_TFT_BL_FAULT 0U
```

◆ DI_TFT_FAIL

```
#define DI_TFT_FAIL 8U
```

◆ DISPLAY_STATE_DISCONNECTED

```
#define DISPLAY_STATE_DISCONNECTED "DISCONNECTED"
```

◆ DISPLAY_STATE_ERROR

```
#define DISPLAY_STATE_ERROR "ERROR"
```

◆ DISPLAY_STATE_OFF

```
#define DISPLAY_STATE_OFF "OFF"
```

◆ DISPLAY_STATE_ON

```
#define DISPLAY_STATE_ON "ON"
```

◆ DISPLAYSERVICE_MAX_DISPLAY_COUNT

```
#define DISPLAYSERVICE_MAX_DISPLAY_COUNT 1
```

◆ DO_RESET_TFT

```
#define DO_RESET_TFT 1U
```

◆ DO_STANDBY_MODE_TFT

```
#define DO_STANDBY_MODE_TFT
```

Value:

```
7U /* This Configuration for JDI Display We are using DO_RESET_TFT and SPI Communication.  
We are not using DO_STANDBY_MODE_TFT for JDI */
```

◆ MAX_POWER_STATUS_LEN

```
#define MAX_POWER_STATUS_LEN 4U
```

◆ MIN_DELAY_DISPLAY_EPOWER_ON

```
#define MIN_DELAY_DISPLAY_EPOWER_ON 10 /*delay 10 us Set_Display_State on */
```

◆ MIN_DELAY_DISPLAY_OFF_MS

```
#define MIN_DELAY_DISPLAY_OFF_MS 100
```

◆ MIN_DELAY_DISPLAY_ON_MS

```
#define MIN_DELAY_DISPLAY_ON_MS 120
```

◆ MIN_DELAY_ERROR_PIN_READ

```
#define MIN_DELAY_ERROR_PIN_READ 166
```

◆ MIN_DELAY_RST_STBY

```
#define MIN_DELAY_RST_STBY 30
```

