


dk_bspal_deserializer.c File Reference

Deserializer BSPAL API to start and stop the Multimedia. [More...](#)

```
#include <stdio.h>
#include <fcntl.h>
#include <unistd.h>
#include <sys/ioctl.h>
#include <errno.h>
#include <string.h>
#include "dk_logger.h"
#include "dk_bspal_deserializer.h"
```

Include dependency graph for dk_bspal_deserializer.c:

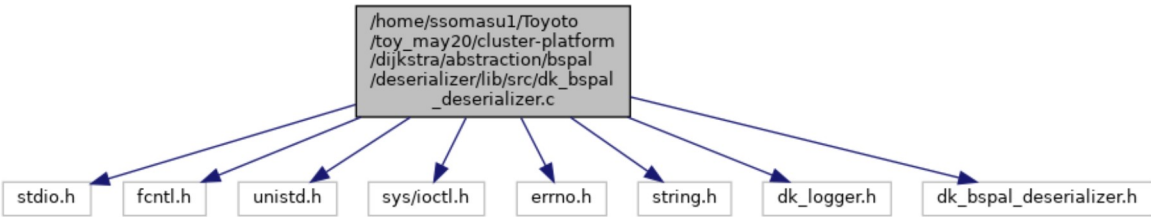

Macros

```
#define DEVICE_NAME "/dev/video_deser"
    Defines the path to the deserializer device node. More...
```

Functions

	LOG_DECLARE_CONTEXT (g_log_bspal_deser)
	Standard io header. More...
static int32_t	deserializer_ioctl_handler (int32_t p_ioctl_cmd_S32, int32_t *p_status_S32)
	API to perform an IOCTL operation on the deserializer device. More...
void	dk_bspal_deserializer_init (void)
void	dk_bspal_deserializer_deinit (void)
int32_t	dk_bspal_deserializer_configure (uint8_t p_config_cmd_U8)
int32_t	dk_bspal_deserializer_streaming_control (uint8_t p_control_cmd_U8)
int32_t	dk_bspal_deserializer_get_status (uint8_t p_status_type_U8, int32_t *p_status_val_S32)
int32_t	dk_bspal_deserializer_test_pattern (uint8_t p_control_cmd_U8)

Detailed Description

Deserializer BSPAL API to start and stop the Multimedia.

Copyright

VISTEON CORPORATION CONFIDENTIAL

[2025] Visteon Corporation
All Rights Reserved

NOTICE: This is an unpublished work of authorship, which contains trade secrets. Visteon Corporation owns all rights to this work and intends to maintain it in confidence to preserve its trade secret status. Visteon Corporation reserves the right, under the copyright laws of the United States or those of any other country that may have jurisdiction, to protect this work as an unpublished work, in the event of an inadvertent or deliberate unauthorized publication. Visteon Corporation also reserves its rights under all copyright laws to protect this work as a published work, when appropriate. Those having access to this work may not copy it, use it, modify it, or disclose the information contained in it without the written authorization of Visteon Corporation.

Authors

Name	CDSID	Location
Sriakesh P	ssomasu1	VTSC, Bengaluru, India

Macro Definition Documentation

◆ DEVICE_NAME

```
#define DEVICE_NAME  "/dev/video_deser"
```

Defines the path to the deserializer device node.

Function Documentation

◆ deserializer_ioctl_handler()

```
static int32_t deserializer_ioctl_handler ( int32_t  p_ioctl_cmd_S32,  
                                           int32_t*  p_status_S32  
                                           )
```

static

API to perform an IOCTL operation on the deserializer device.


Parameters

- [in] **p_fd_SINT** File descriptor of the opened deserializer device.
- [in] **p_ioctl_cmd_S32** IOCTL command to be executed.
- [out] **p_status_S32** Pointer to store the status if applicable (can be NULL).

Returns

(0) on success, or -1 if the IOCTL operation fails.

Here is the caller graph for this function:

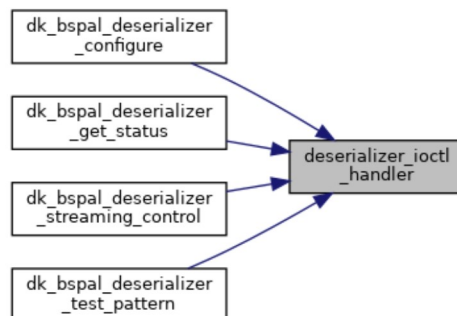

◆ dk_bspal_deserializer_configure()

```
int32_t dk_bspal_deserializer_configure ( uint8_t p_config_cmd_U8 )
```

Here is the call graph for this function:



◆ dk_bspal_deserializer_deinit()

```
void dk_bspal_deserializer_deinit ( void )
```

◆ dk_bspal_deserializer_get_status()

```
int32_t dk_bspal_deserializer_get_status ( uint8_t  p_status_type_U8,  
                                           int32_t*  p_status_val_S32  
                                           )
```

Here is the call graph for this function:



◆ dk_bspal_deserializer_init()

```
void dk_bspal_deserializer_init ( void )
```

◆ dk_bspal_deserializer_streaming_control()

```
int32_t dk_bspal_deserializer_streaming_control ( uint8_t p_control_cmd_U8 )
```

Here is the call graph for this function:



◆ dk_bspal_deserializer_test_pattern()

```
int32_t dk_bspal_deserializer_test_pattern ( uint8_t p_control_cmd_U8 )
```

Here is the call graph for this function:



◆ LOG_DECLARE_CONTEXT()

```
LOG_DECLARE_CONTEXT ( g_log_bspal_deser )
```

Standard io header.

Library provides subroutines for file operations

Library provides fixed-width integer types and macros

Library enables device-specific control using ioctl system calls

Library defines macros for reporting and retrieving error conditions

Library supports string operations

Library defines the logging levels

Library for BSPAL API