BEAST / EQUIPMENT PERFORMANCE

Heating COP vs. outdoor temperature

Full-load coil COP • 25-ton unit • 70°F entering air • 404 CFM/ton • 0°F lockout

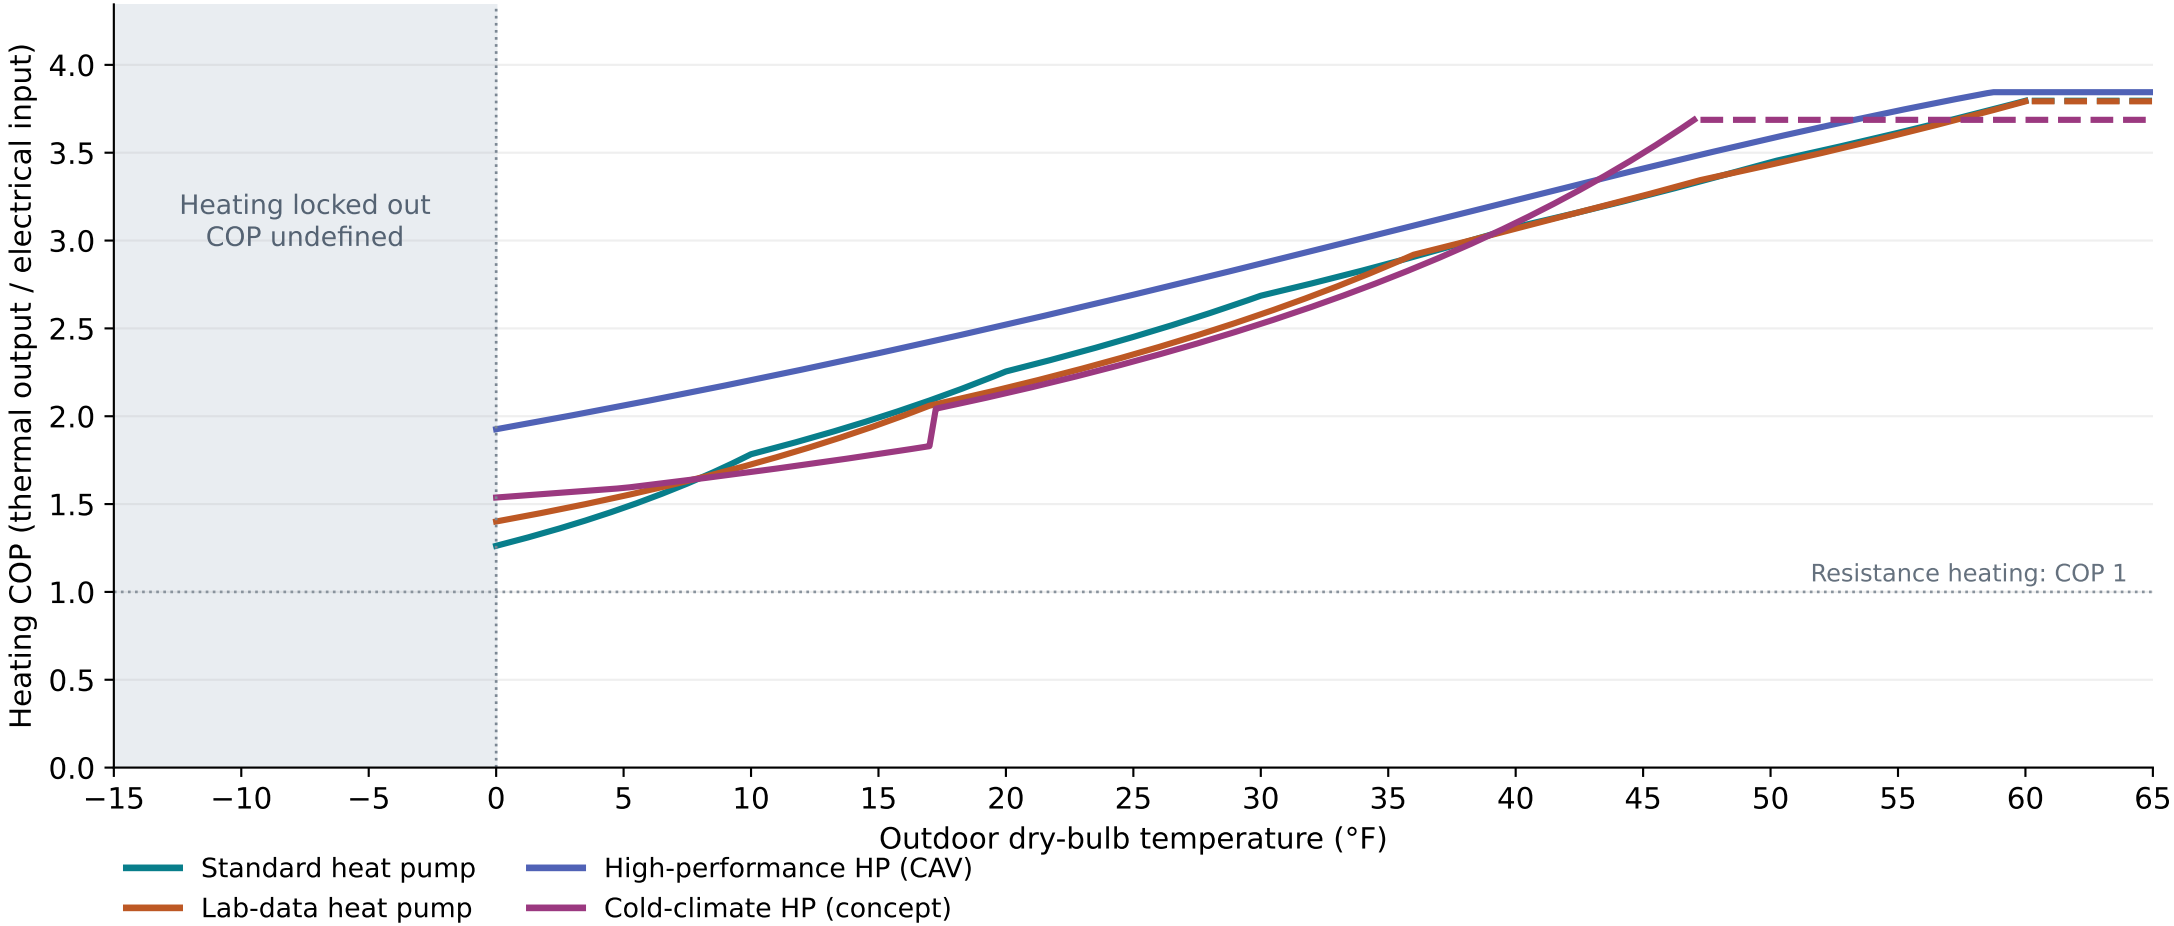

Solid: within curve limits. Dashed: input held at a performance-map boundary.

Direct output of lib/rtu-curves.ts → heatingOperatingPoint(); 0.25°F increments. Entering/outdoor RH: 50%.

Excludes supply fan, reheat and cycling losses. No added defrost adjustment. Cold-climate concept changes stage near 17°F.