
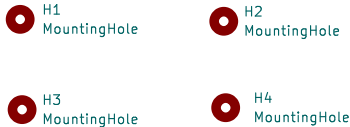


POWER STAGE

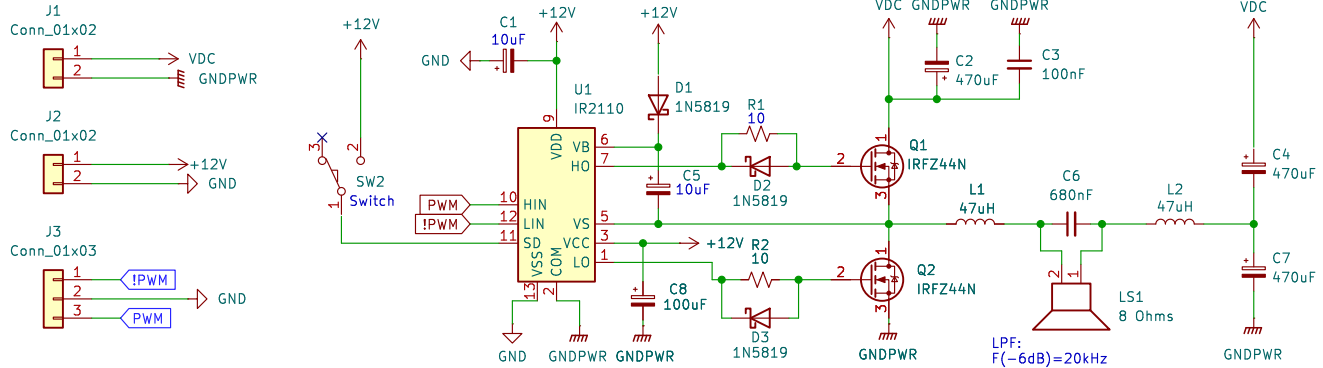

ENGG220
FINAL PROJECT – VICTOR A

- * All resistors R should be rated at least 1/4 W
- * All capacitors used in the power stage should be rated at least 50V
- * All capacitors used with IR2110 should be rated at least 16V, 25V recommended.
- * Inductors L1,L2 should be able to handle at least 2A and lowest DCR possible.
- * VDC MAX : 36V | VDC Minimum current: 2A

Sheet: /

File: PowerStage.kicad_sch

Title: CLASS D POWER STAGE

Size: User

Date: 04/30/2026

Rev:

KiCad E.D.A. 9.0.6

Id: 1/1