




Power Input Regulation

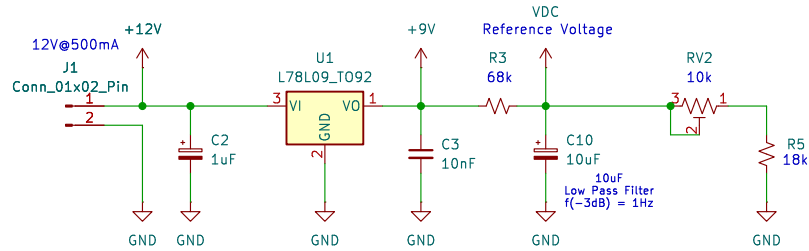

Preamplification / Audio Filtering / Test Points

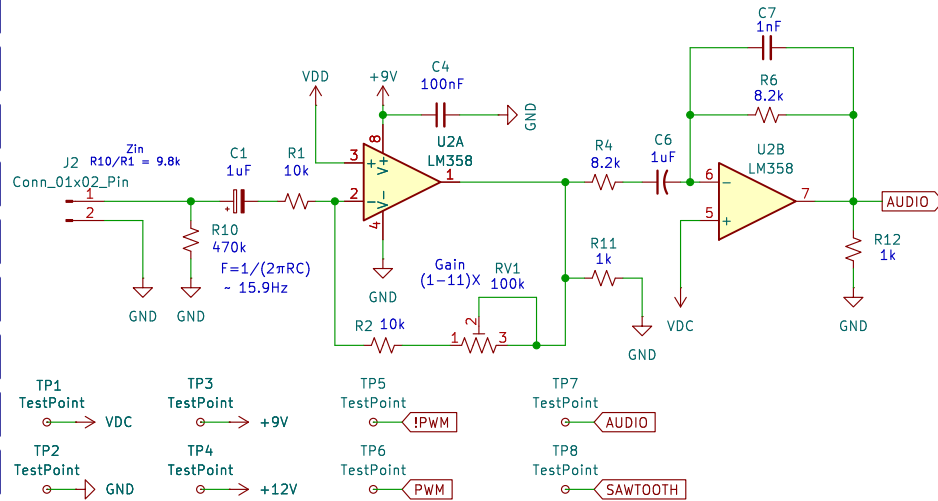

Pulse Width Modulation (PWM) / Mounting Holes

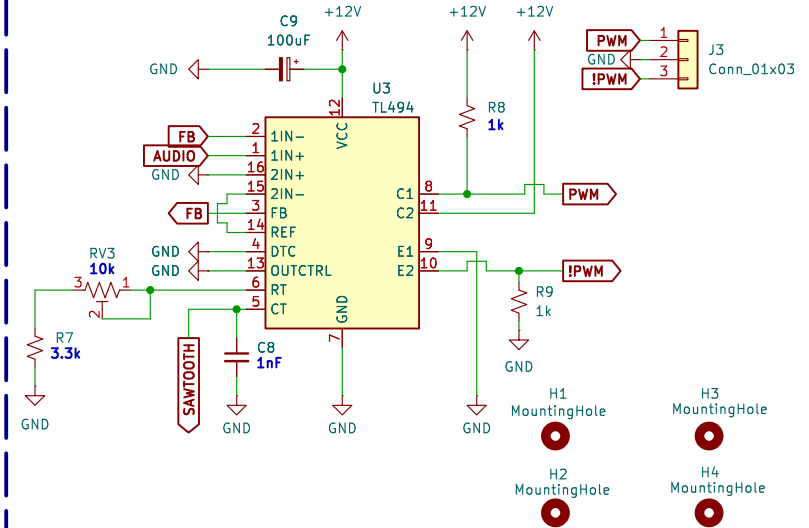

- * All capacitors (C) should be rated at least 25V
- * All resistors (R) should handle at least 1/4 W
- * RV2 Should be adjusted to 50% duty cycle in either PWM or IPWM when no audio is connected

Sheet: /

File: ClassD.kicad_sch

@Mundo Electronica

Title: ENGG220 Final Project – Victor Rosales

Size: User

Date:

Rev:

KiCad E.D.A. 9.0.6

Id: 1/1