


*ZED Link Capture Card Duo

Overview & Datasheet

The ZED Link Duo is a versatile GMSL2 capture card designed to scale industrial vision on the NVIDIA® Jetson Orin™ platform. Capable of interfacing with up to four cameras, it provides a massive 10Gbps bandwidth with ultra-low latency. This makes it the definitive choice for complex deployments that require synchronized multi-angle coverage or high-resolution surround sensing.

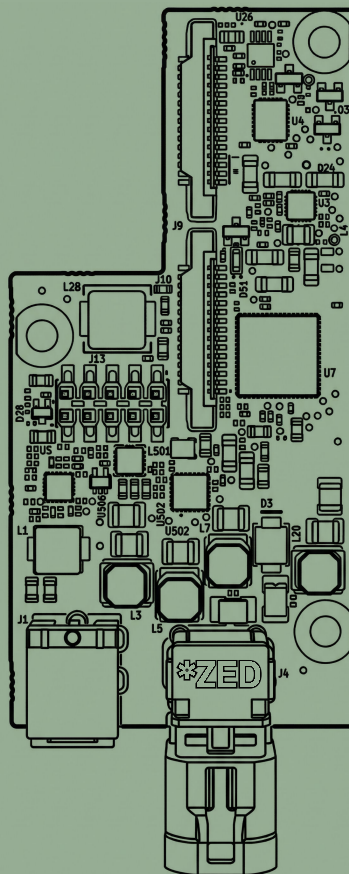

*ZED Link Capture Card Duo Datasheet Revision History

Document Version	Description	Revision Date
1.0	● Initial release	March 2023
1.1	● Added: Dimensions on technical drawings	May 2025
1.2	● Added: ZED Link Capture Card Duo Part Numbers	April 2026
1.3	● Minor corrections: Typos, wording	September 2026

*ZED Link Capture Card Duo

General Specifications

Scalable Camera Setups

The ZED Link Duo is engineered to handle complex, multi-sensor arrays. It provides a lot of flexibility that allows to scale from a simple stereo vision setup to a comprehensive multi-angle array within a unified hardware assembly.

Shutter Level Synchronization

The ZED Link Duo maintains shutter-level hardware synchronization across the input streams, providing high-accuracy point-cloud generation and reliable 3D mapping in complex, dynamic environments.


High-Performance GMSL2

Engineered for complex and demanding applications, the Duo supports a total bandwidth of 10Gbps that ensures smooth data delivery across all connected devices, allowing a simultaneous processing of multiple high-resolution streams.


ZED Link Capture Card Duo General Specifications

Computer Compatibility	NVIDIA® Jetson Orin™ Nano NVIDIA® Jetson Orin™ NX NVIDIA® Jetson AGX Orin™
Camera Compatibility	ZED Link Duo is compatible with all ZED X / ZED X One camera models
Capture Capability	Max. 4x GMSL2 Camera inputs in SD/HD Max. 2x GMSL2 Camera inputs at 4K@15fps
Deserializer	MAX96712
Input Voltage	9 - 19V DC (External power is not required on AGX)
Typical Power Consumption	~0.32W
Operating Temperature	-20°C to +85°C
Weight	~30g

Functional Diagram

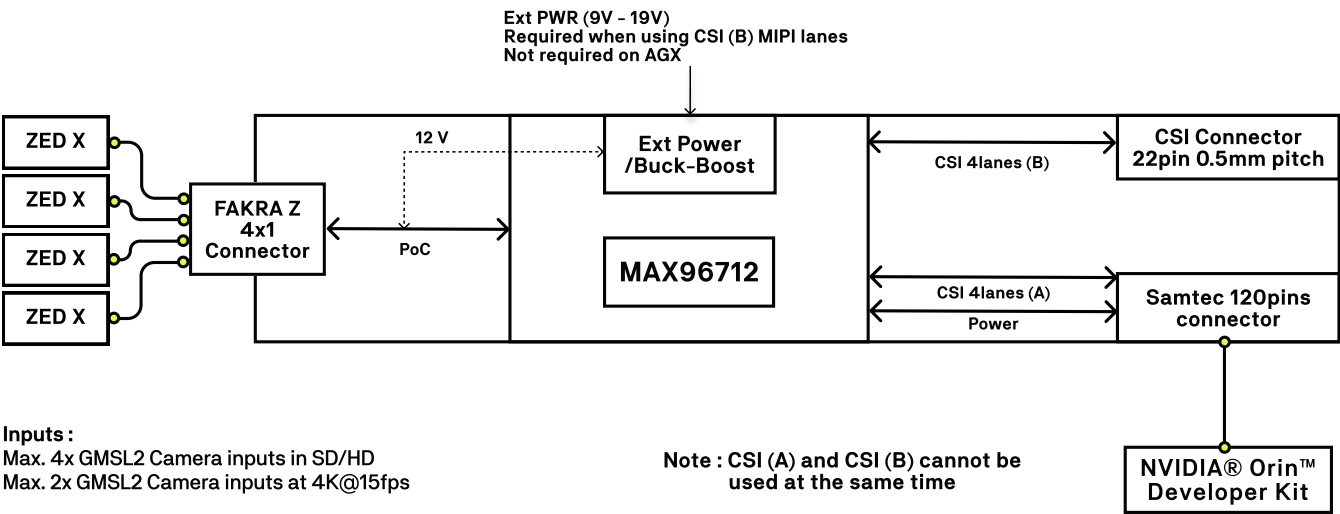

*ZED Link Capture Card Duo Technical Drawings

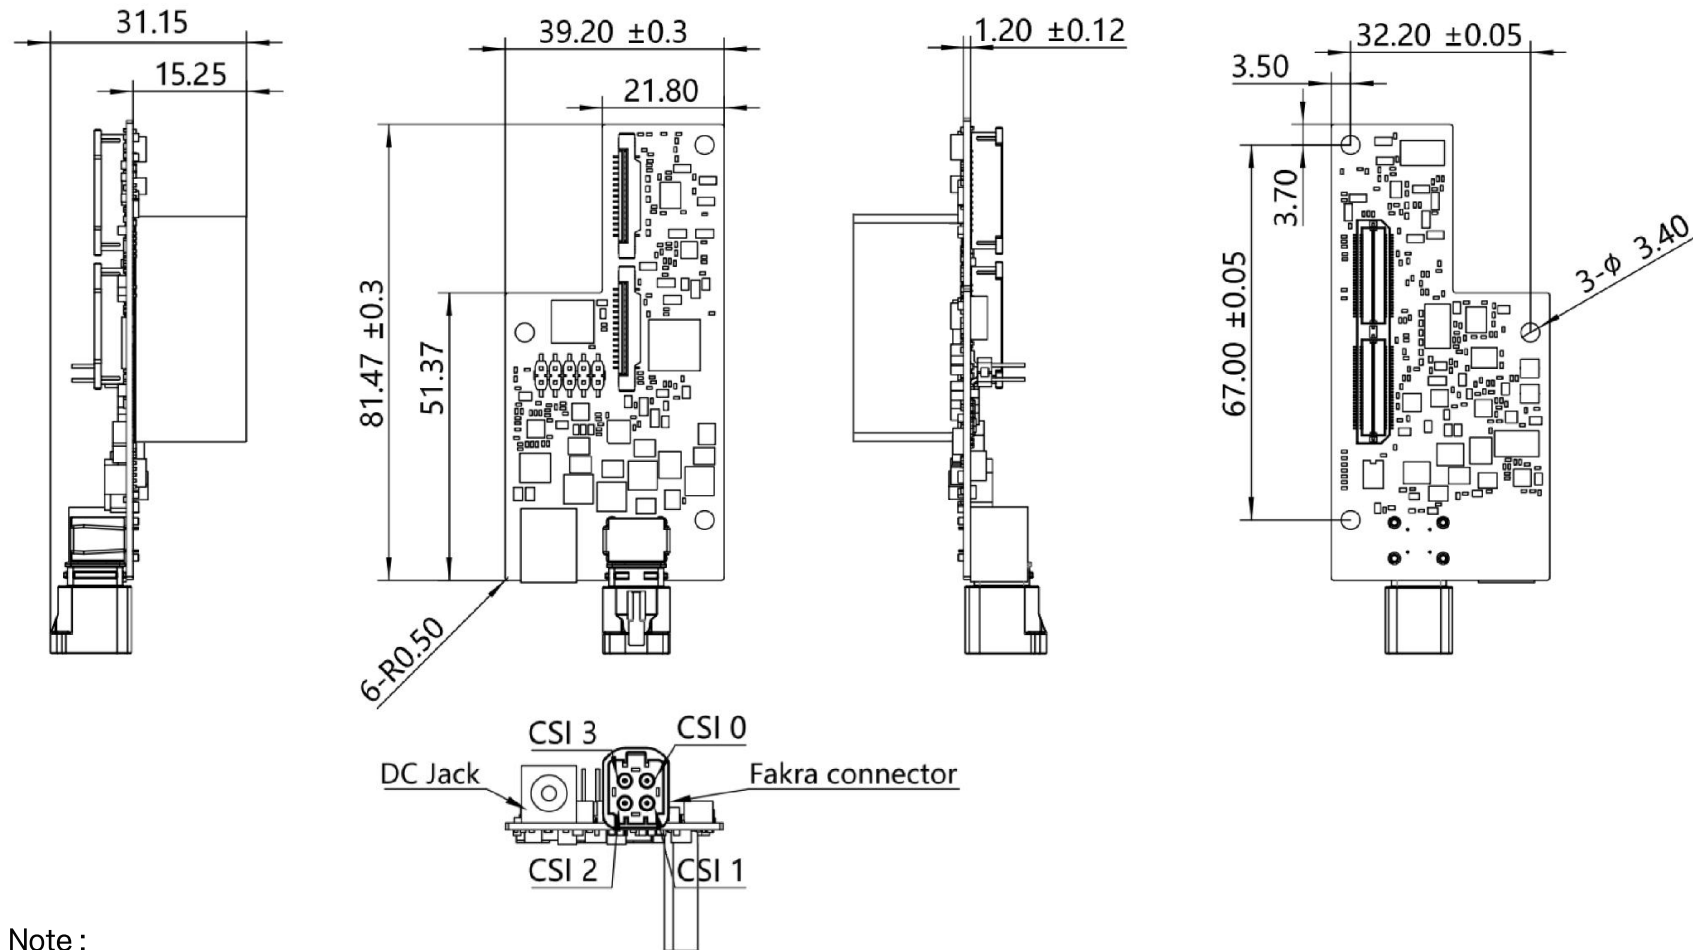


Note :
Other unmarked tolerances are $\pm 0.3\text{mm}$

*ZED Link Capture Card Duo Interfaces


Interface J4 (Fakra)

Part Number	1-2304169-Q
Connector Profile	4 pins

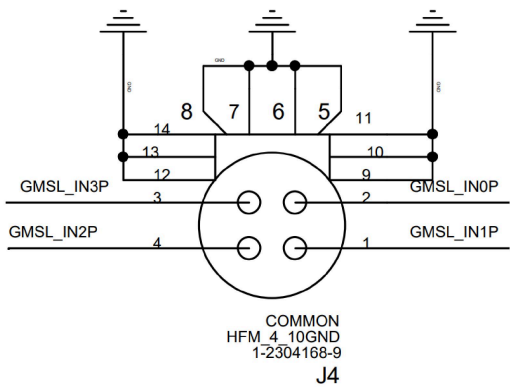


Interface J13 (GPIO Header)

Part Number	TSM-105-01-T-DV-P-TR
Connector Profile	2x5 pins 2.54 mm pitch
I/O Configuration	MFP10 can be used as Fsync Input (Slave Mode) or Output (Master Mode)

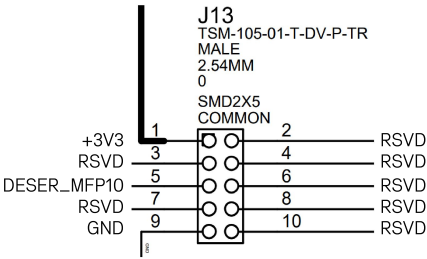

Interface J1 (External 9V - 19V)


Part Number	J-082BH
Connector Type	DC Jack
Inner diameter	2.5 mm
Outer diameter	6.5 mm

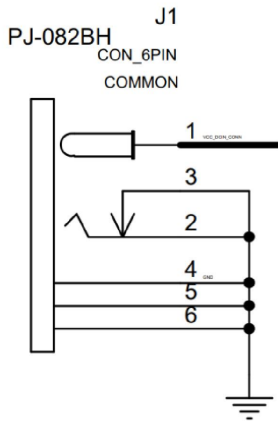

*ZED Link Capture Card Duo Interfaces

Interface J9 and J10 (MIPI CSI 15 pins)


Part Number	1-1734248-5
Connector Profile	2x15 pins
Connection Cable Specifications	Can be connected to Jetson Orin™ NX and Nano Developer Kits using Arducam 15 to 22 MIPI cables (Cannot be used simultaneously with the Samtec 120 pins connector J501mm)

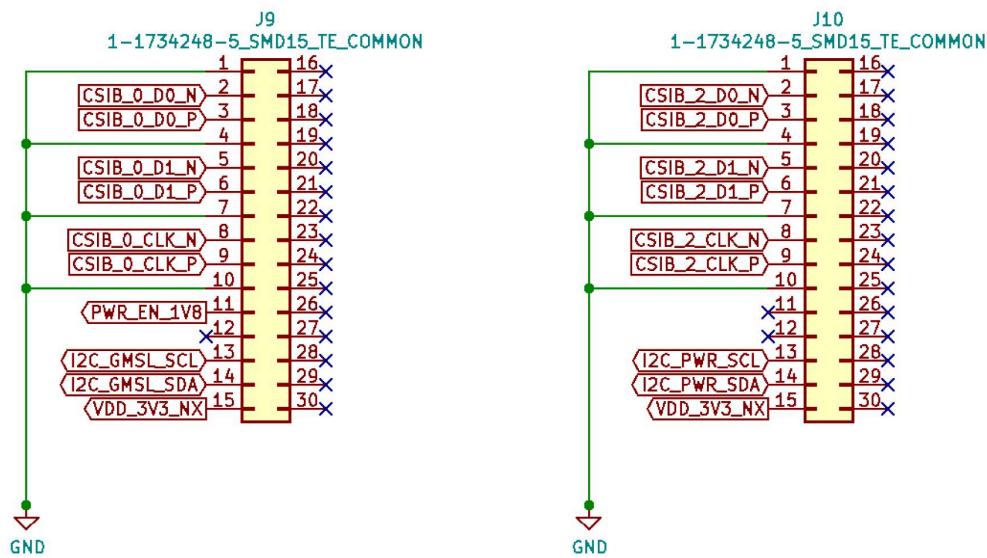

*ZED Link Capture Card Duo Interfaces

Interface J501 (Samtec to AGX)

Part Number	QTH-060-04-H-D-A-TR
Connector Profile	120 pins 0.5 mm pitch
Connectivity	Can be used with AGX Orin™ Developer Kit
Board to Board Distance	16mm

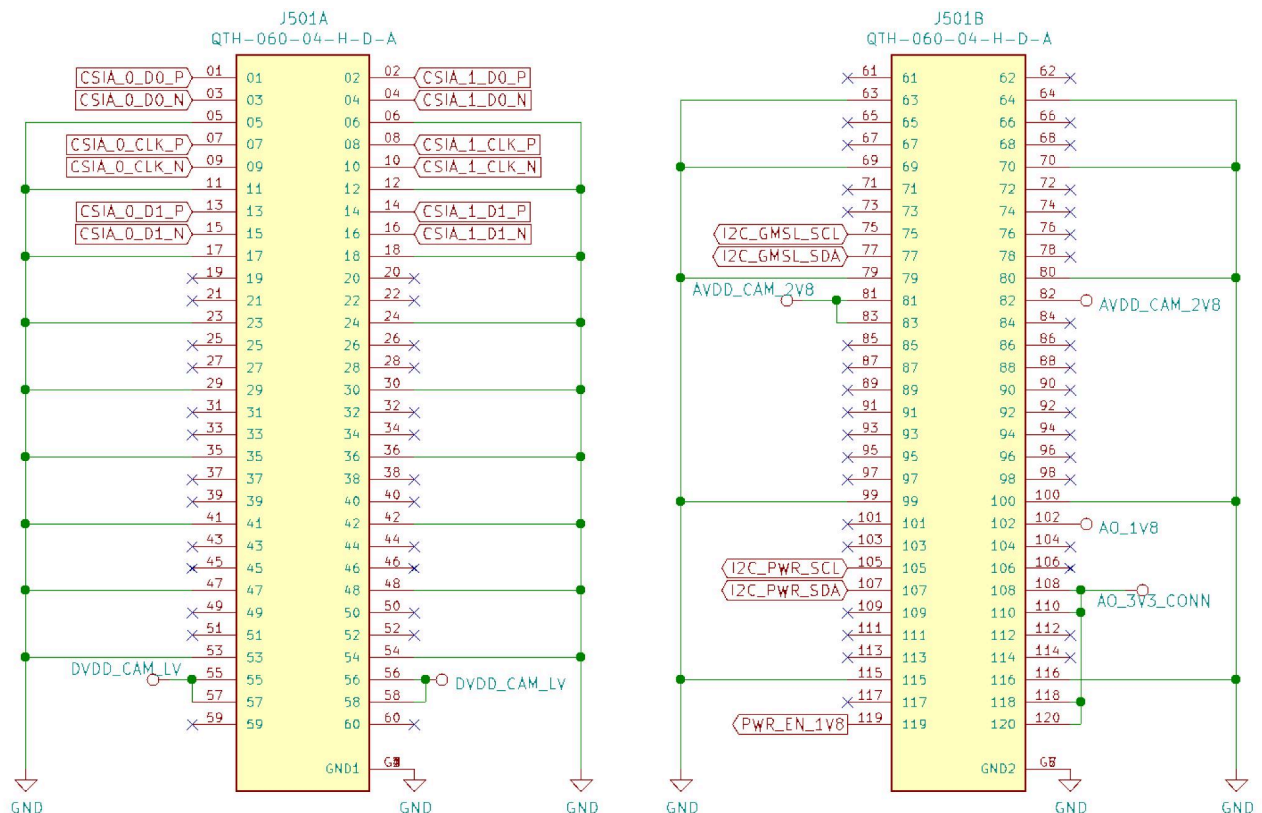

*ZED Link Capture Card Duo Part Number

ZED Link Capture Card Duo Part Number

ZED Link Capture Card Duo	
SKU	ACC-210000