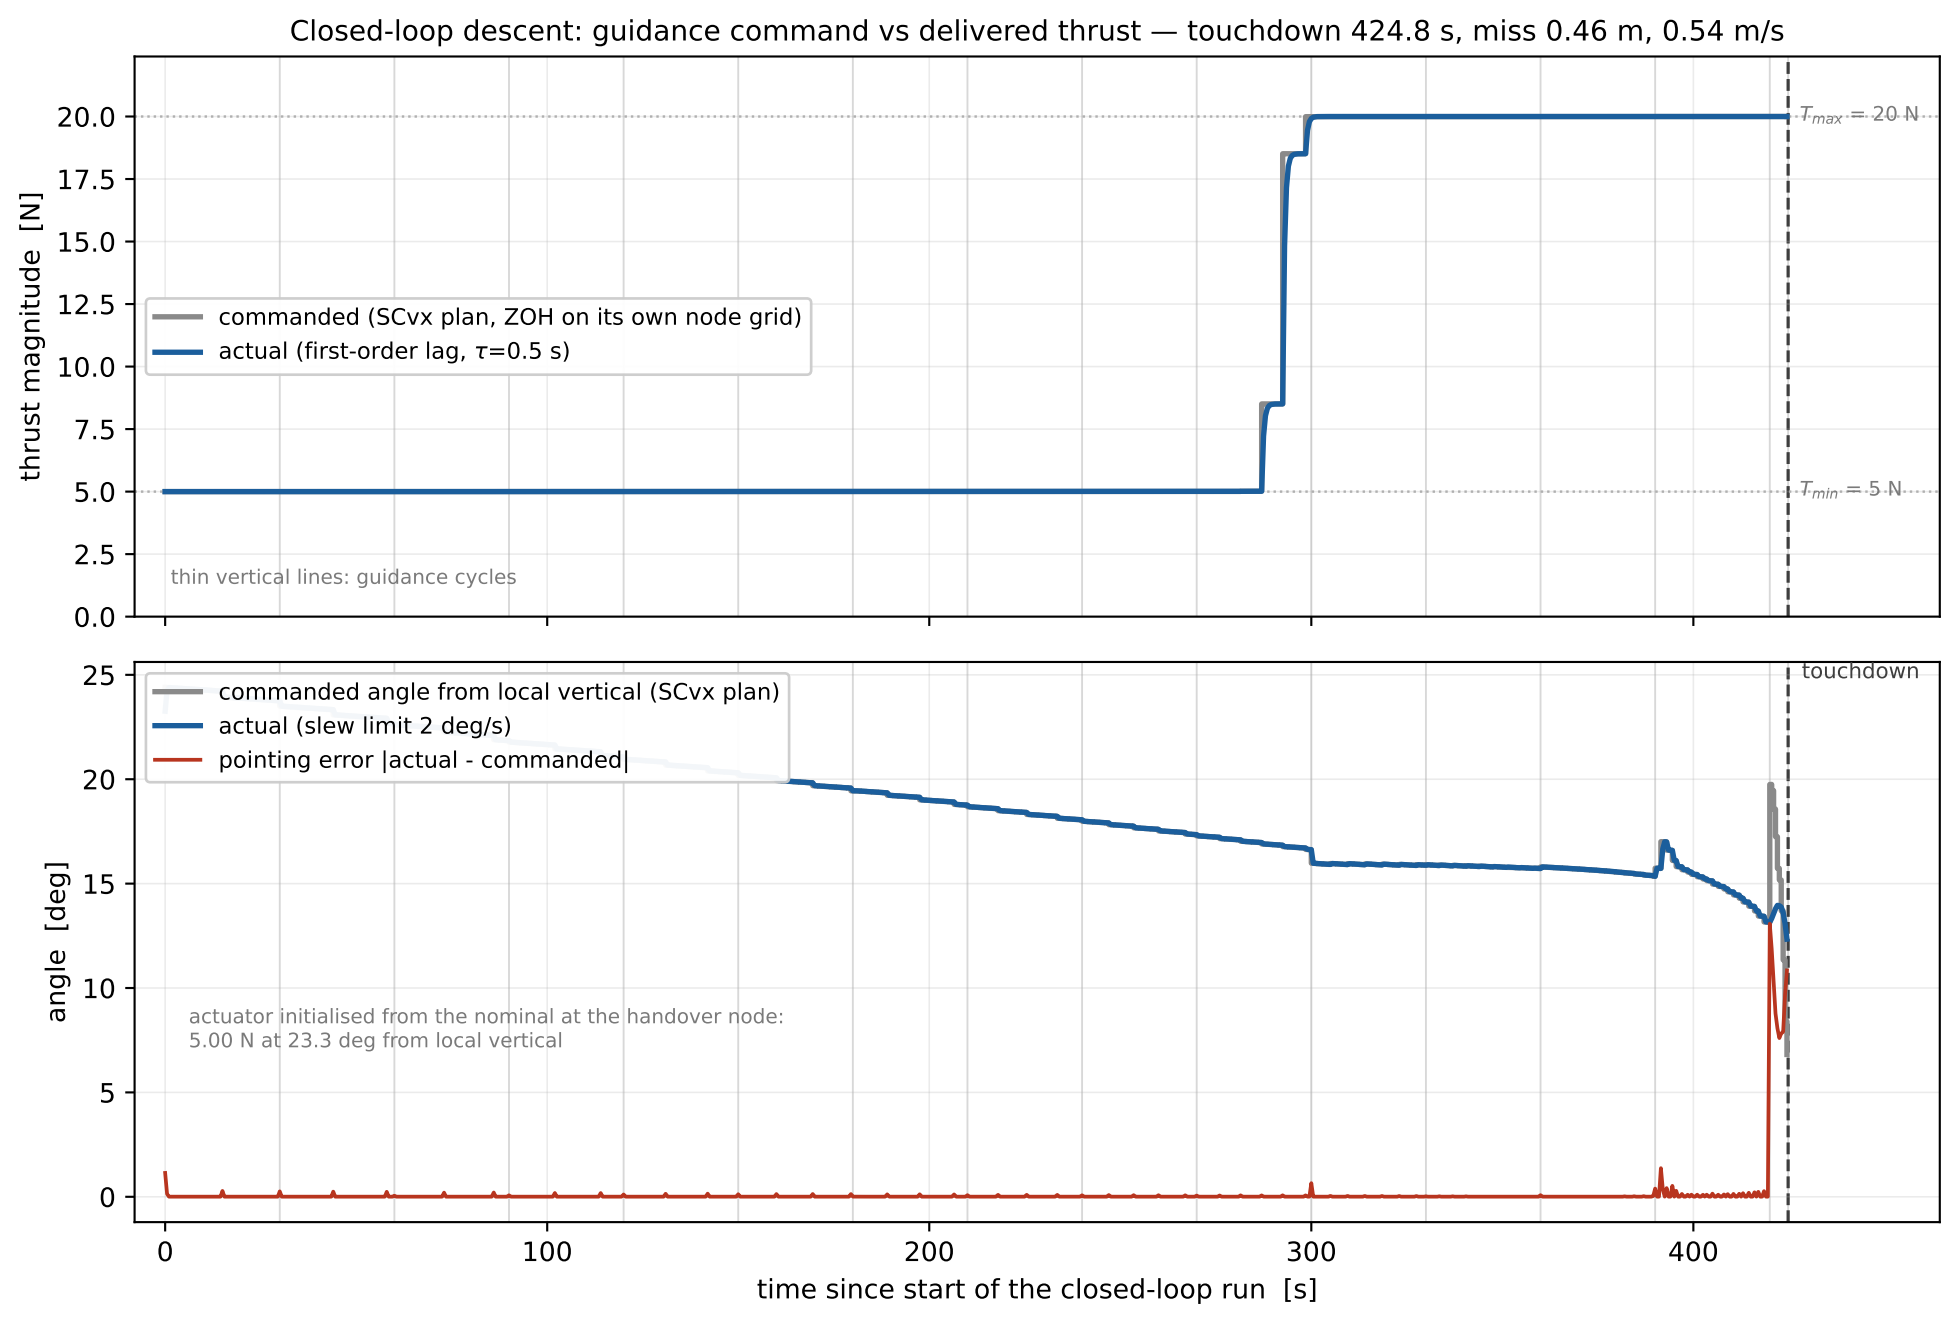
Closed-loop descent: guidance command vs delivered thrust — touchdown 424.8 s, miss 0.46 m, 0.54 m/s
thrust magnitude [N]
commanded (SCvx plan, ZOH on its own node grid)
actual (first-order lag, τ=0.5 s)
T_{max} = 20 N
T_{min} = 5 N
thin vertical lines: guidance cycles
angle [deg]
commanded angle from local vertical (SCvx plan)
actual (slew limit 2 deg/s)
pointing error |actual - commanded|
touchdown
actuator initialised from the nominal at the handover node:
5.00 N at 23.3 deg from local vertical
time since start of the closed-loop run [s]