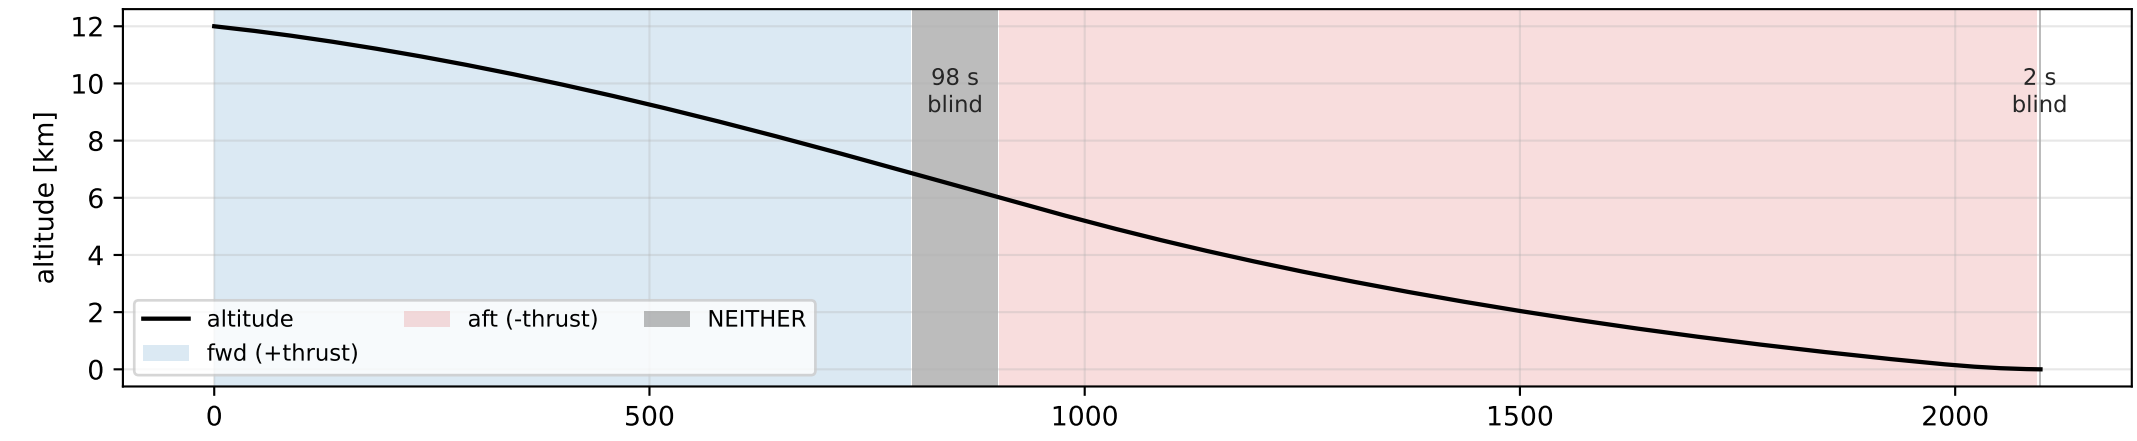
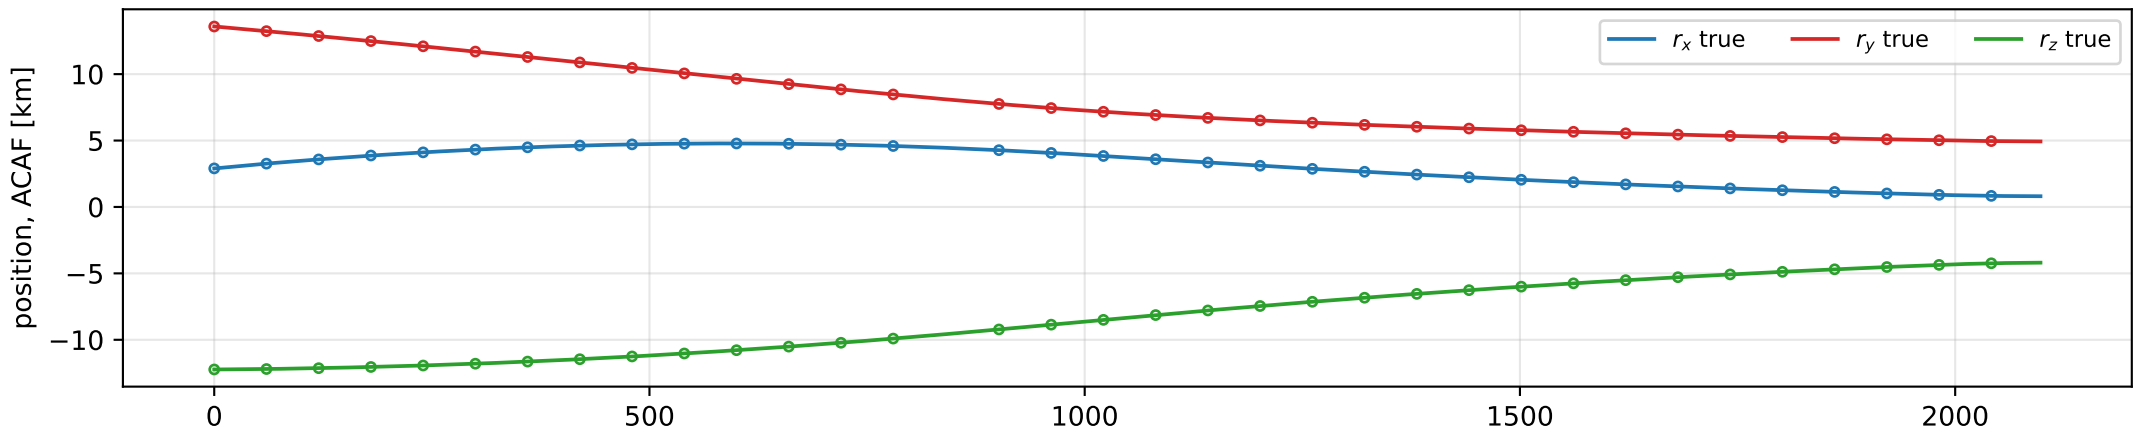
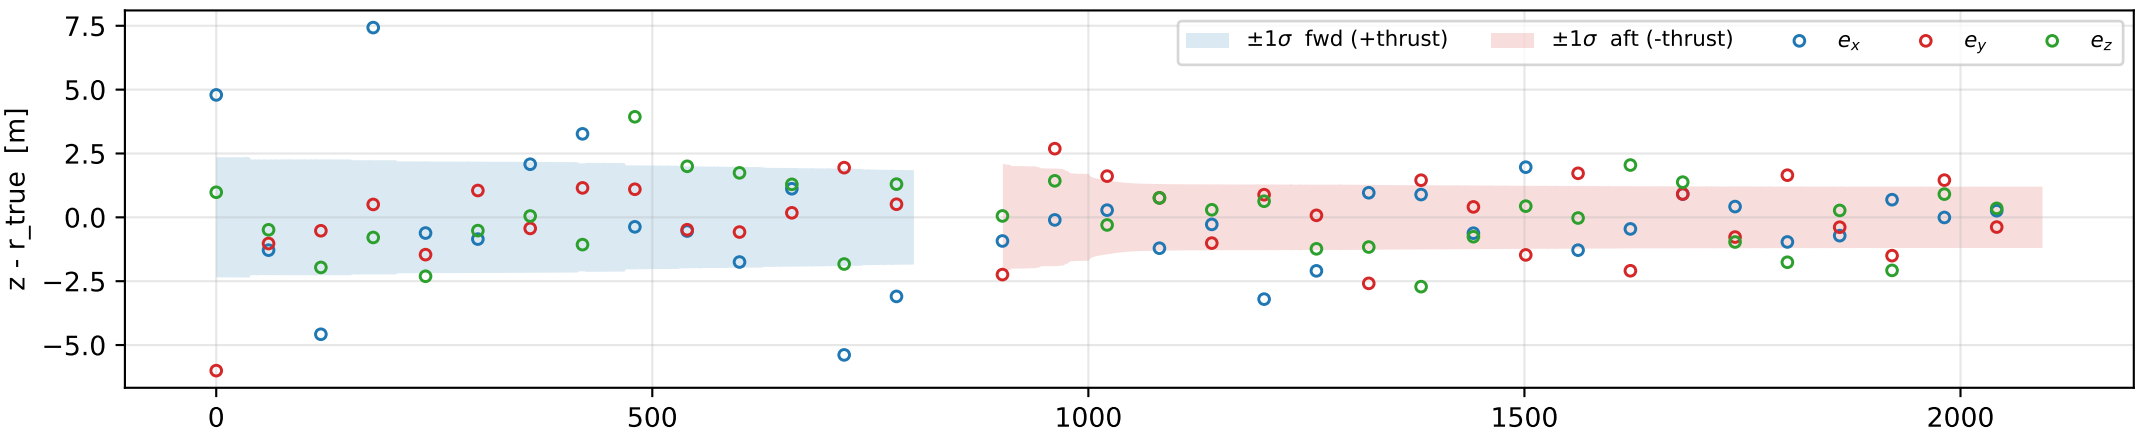
Camera block on the flown descent - closed_loop_imuplot.json
FOV 65.24 deg (ONC-W1), position fix, noise model 'twoterm' = sqrt((111 urad x rho)^2 + (1.2 m)^2), 60 s cadence, seed 3
which camera can see the surface, evaluated on the real 49 152-facet shape (ray hit OR visible vertex inside the FOV cone)



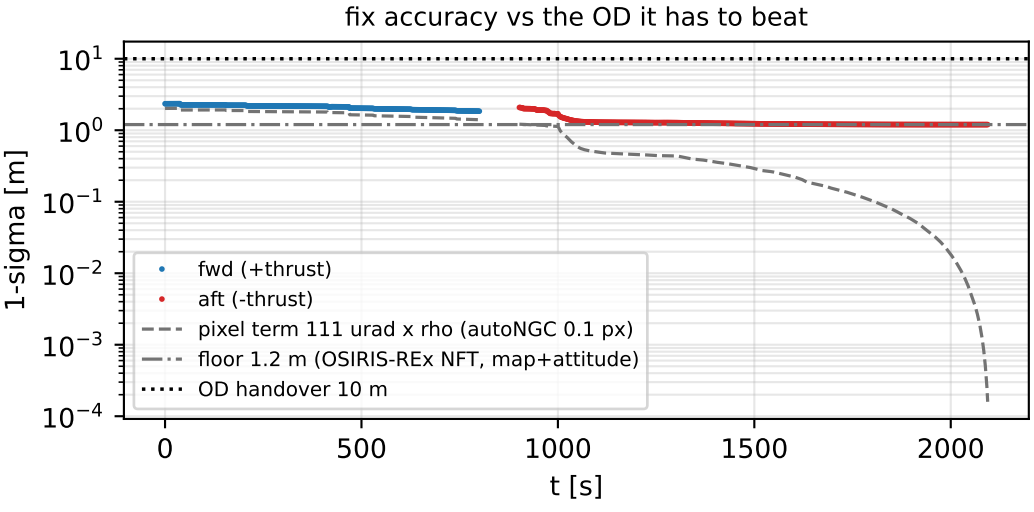

true position (lines) and the camera fixes (circles). Landmarks are body-fixed, so the measurement is already in ACAF -- no rotation



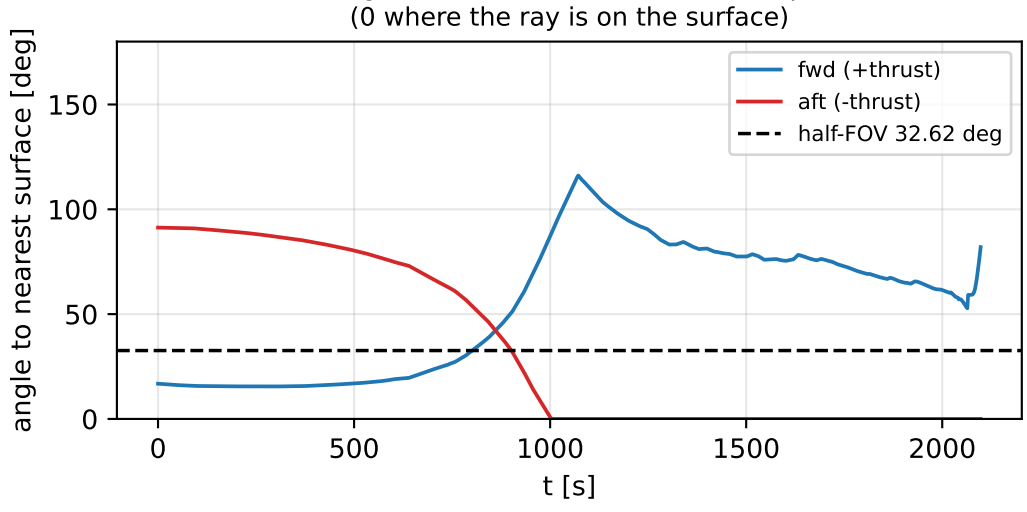

TEST: the fix errors must sit inside the envelope, and the envelope must follow the IMAGING RANGE, not the altitude



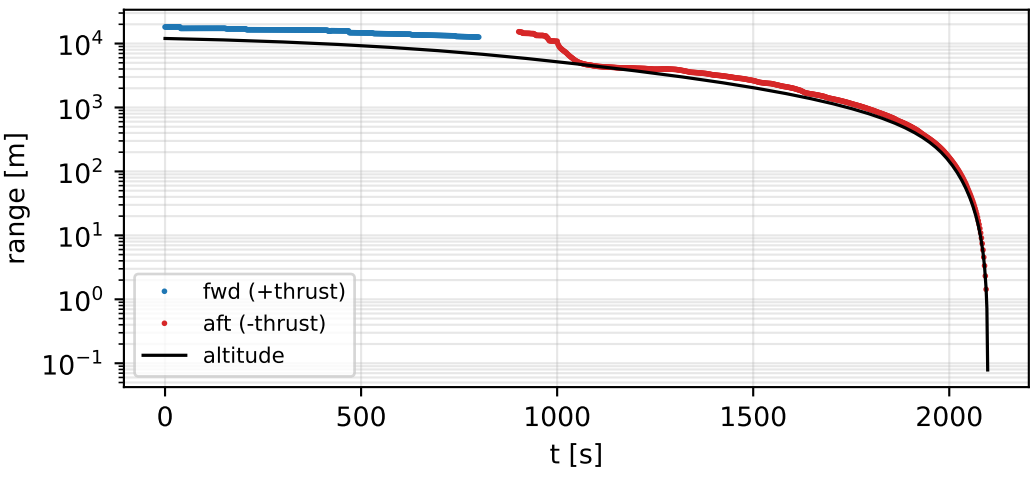

fix accuracy vs the OD it has to beat




boresight to the nearest visible surface point
(0 where the ray is on the surface)




imaging range vs altitude: they are NOT the same
(the frame looks at terrain off to the side)




normalised error: 70 % within 1$\sigma$ (expect 68 %), n = 102
mean -0.061, std 1.057 (expect 0, 1)

