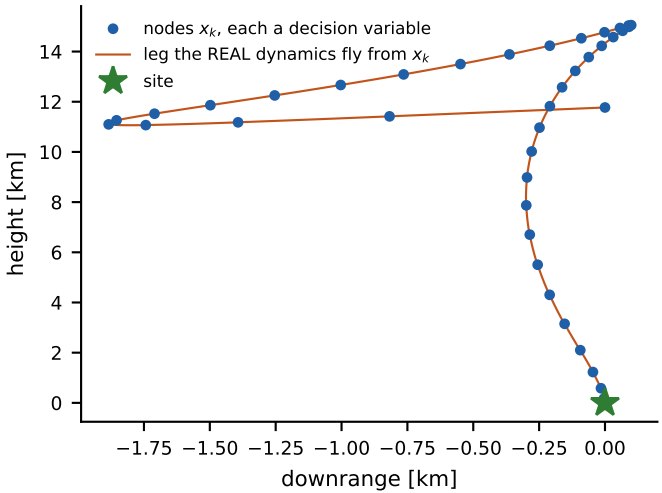
nodes x_k, each a decision variable
leg the REAL dynamics fly from x_k
site
height [km]
downrange [km]

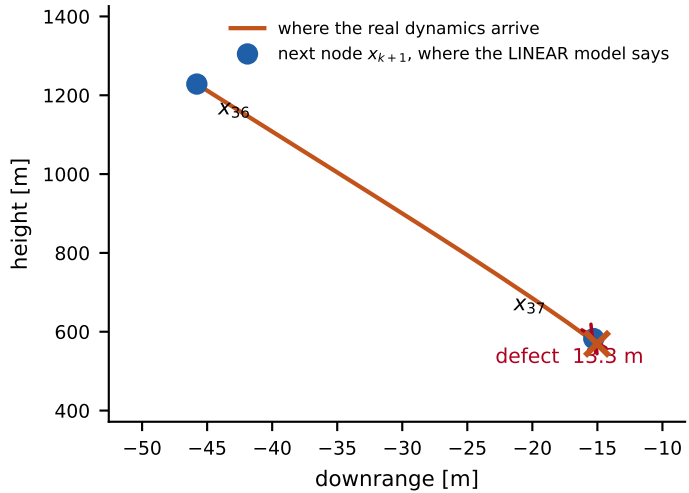
where the real dynamics arrive
next node x_{k+1}, where the LINEAR model says
x_{36}
x_{37}
defect 15.3 m
height [m]
downrange [m]

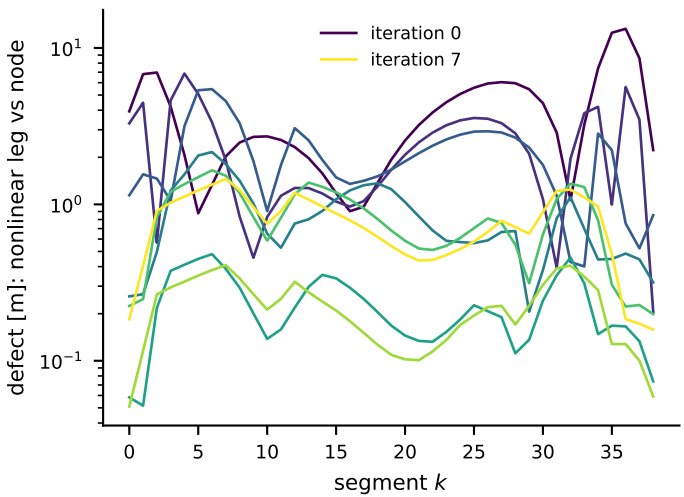
iteration 0
iteration 7
defect [m]: nonlinear leg vs node
segment k

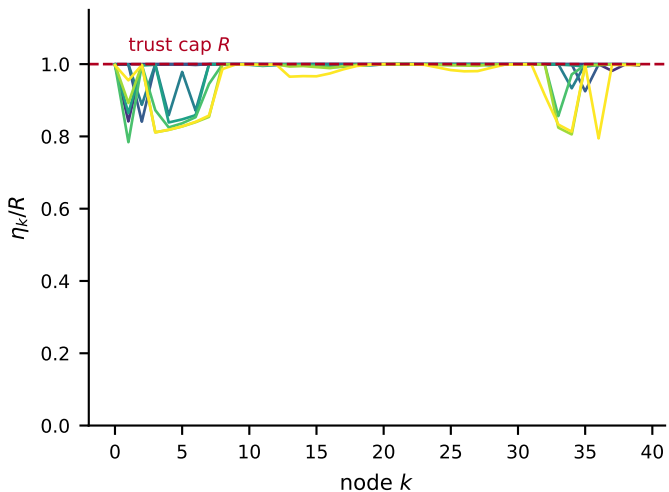
trust cap R
η_k/R
node k