

- Configuración router:

```

R1
archive

R1#show ip interface brief
Interface              IP-Address      OK? Method Status              Protocol
FastEthernet0/0        unassigned      YES NVRAM  up                    up
FastEthernet0/0.30     192.168.50.33   YES NVRAM  up                    up
FastEthernet0/0.40     192.168.50.41   YES NVRAM  up                    up
FastEthernet0/0.50     192.168.50.49   YES NVRAM  up                    up
FastEthernet0/0.70     192.168.50.65   YES NVRAM  up                    up
FastEthernet0/0.110    192.168.50.97   YES NVRAM  up                    up
FastEthernet0/1        unassigned      YES NVRAM  up                    up
FastEthernet0/1.60     192.168.50.57   YES NVRAM  up                    up
FastEthernet0/1.80     192.168.50.73   YES NVRAM  up                    up
FastEthernet0/1.90     192.168.50.81   YES NVRAM  up                    up
FastEthernet0/1.100    192.168.50.89   YES NVRAM  up                    up
FastEthernet0/1.120    192.168.50.101  YES NVRAM  up                    up
FastEthernet1/0        unassigned      YES NVRAM  up                    up
FastEthernet1/0.10     192.168.50.1   YES NVRAM  up                    up
FastEthernet1/0.20     192.168.50.17   YES NVRAM  up                    up
R1#

R1#show ip route
Codes: C - connected, S - static, R - RIP, M - mobile, B - BGP
        D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
        N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
        E1 - OSPF external type 1, E2 - OSPF external type 2
        i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
        ia - IS-IS inter area, * - candidate default, U - per-user static route
        o - ODR, P - periodic downloaded static route

Gateway of last resort is not set

    192.168.50.0/24 is variably subnetted, 12 subnets, 3 masks
C       192.168.50.88/29 is directly connected, FastEthernet0/1.100
C       192.168.50.80/29 is directly connected, FastEthernet0/1.90
C       192.168.50.72/29 is directly connected, FastEthernet0/1.80
C       192.168.50.64/29 is directly connected, FastEthernet0/0.70
C       192.168.50.96/30 is directly connected, FastEthernet0/0.110
C       192.168.50.100/30 is directly connected, FastEthernet0/1.120
C       192.168.50.16/28 is directly connected, FastEthernet1/0.20
C       192.168.50.0/28 is directly connected, FastEthernet1/0.10
C       192.168.50.56/29 is directly connected, FastEthernet0/1.60
C       192.168.50.48/29 is directly connected, FastEthernet0/0.50
C       192.168.50.40/29 is directly connected, FastEthernet0/0.40

R1#

R1#show ip protocols
Routing Protocol is "ospf 1"
  Outgoing update filter list for all interfaces is not set
  Incoming update filter list for all interfaces is not set
  Router ID 1.1.1.1
  Number of areas in this router is 1. 1 normal 0 stub 0 nssa
  Maximum path: 4
  Routing for Networks:
    192.168.50.0 0.0.0.15 area 0
    192.168.50.16 0.0.0.15 area 0
    192.168.50.32 0.0.0.7 area 0
    192.168.50.40 0.0.0.7 area 0
    192.168.50.48 0.0.0.7 area 0
    192.168.50.56 0.0.0.7 area 0
    192.168.50.64 0.0.0.7 area 0
    192.168.50.72 0.0.0.7 area 0
    192.168.50.80 0.0.0.7 area 0
    192.168.50.88 0.0.0.7 area 0
    192.168.50.96 0.0.0.3 area 0
    192.168.50.100 0.0.0.3 area 0
  Reference bandwidth unit is 100 mbps
  Passive interface(s):
    FastEthernet0/0
    FastEthernet0/0.30
  --More--

```

- Switches

Node properties

Switch1 configuration

General

Name: Switch1

Console type: none

Settings

Port: 15

VLAN: 1

Type: access

QinQ EtherType: 0x0100

Ports

Port	VLAN	Type	EtherType
0	1	dot1q	
1	10	access	
2	10	access	
3	10	access	
4	10	access	
5	10	access	
6	10	access	
7	20	access	
8	20	access	
9	20	access	
10	30	access	

Reset OK Cancel Apply

Node properties

Switch2 configuration

General

Name: Switch2

Console type: none

Settings

Port: 16

VLAN: 1


Type: access

QinQ EtherType: 0x0100


Ports

Port	VLAN	Type	EtherType
0	1	dot1q	
1	30	access	
2	30	access	
3	30	access	
4	30	access	
5	40	access	
6	40	access	
7	40	access	
8	40	access	
9	50	access	
10	50	access	


Reset OK Cancel Apply

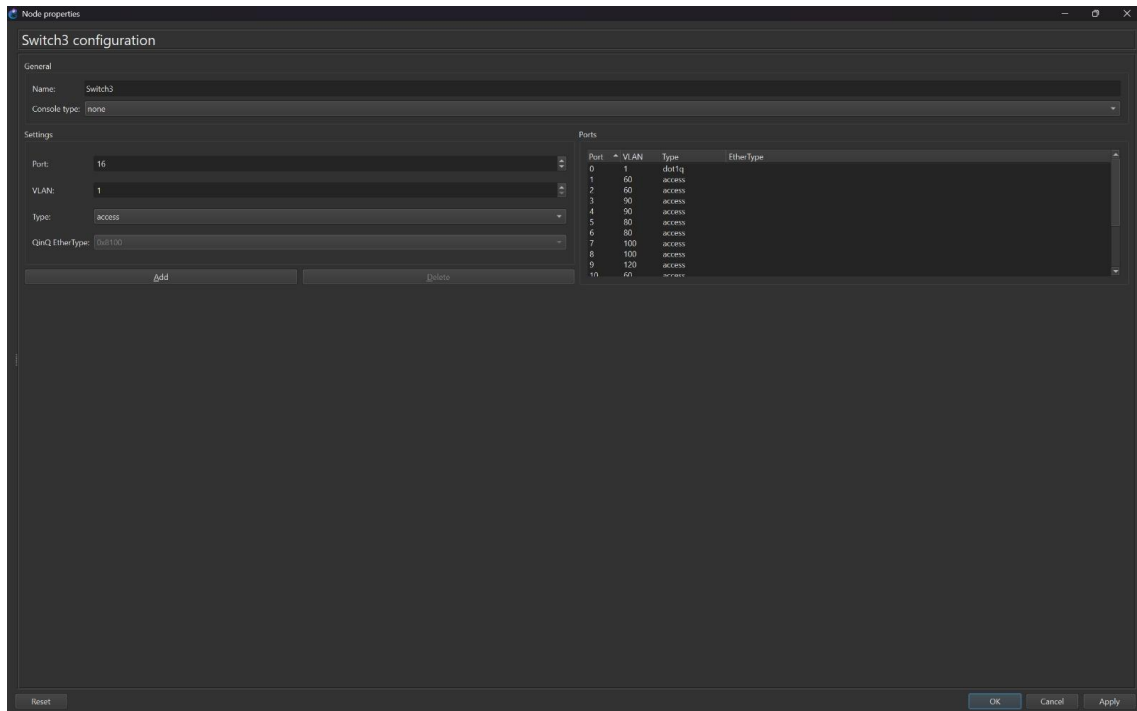


- Ping PC1 – Gateway:

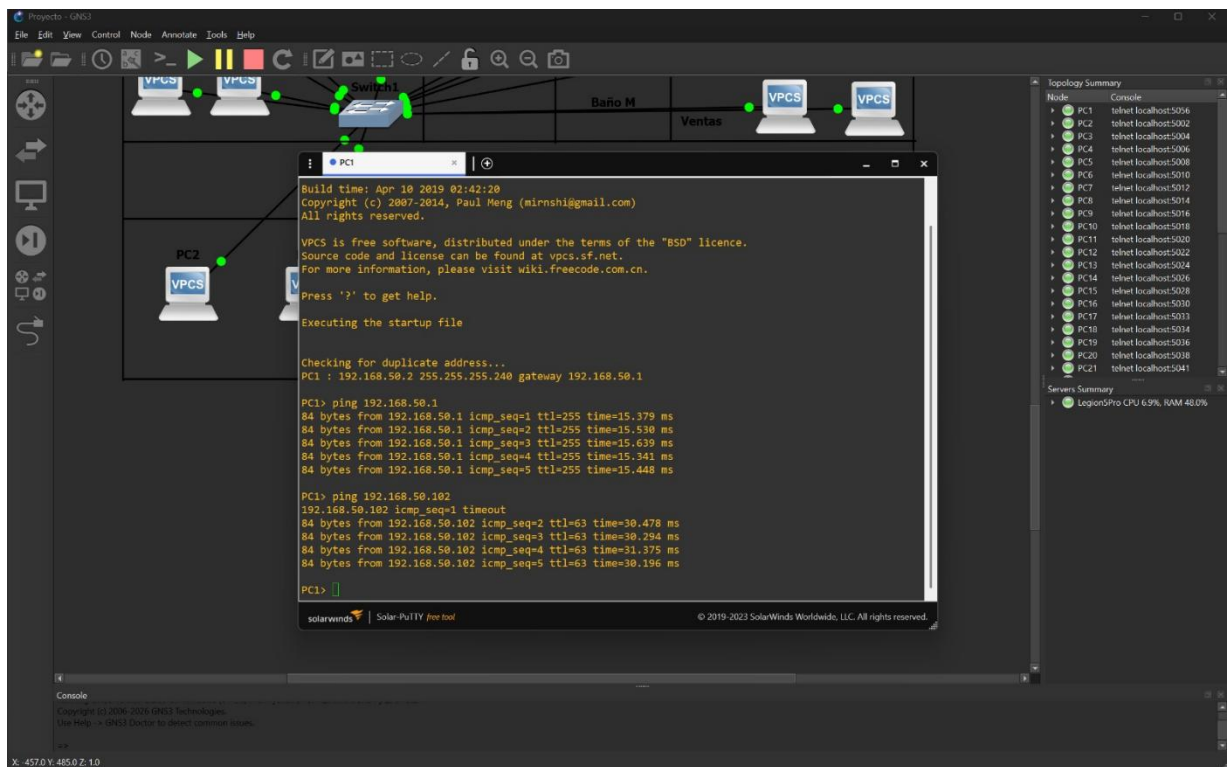


- Ping PC1 – PC38:

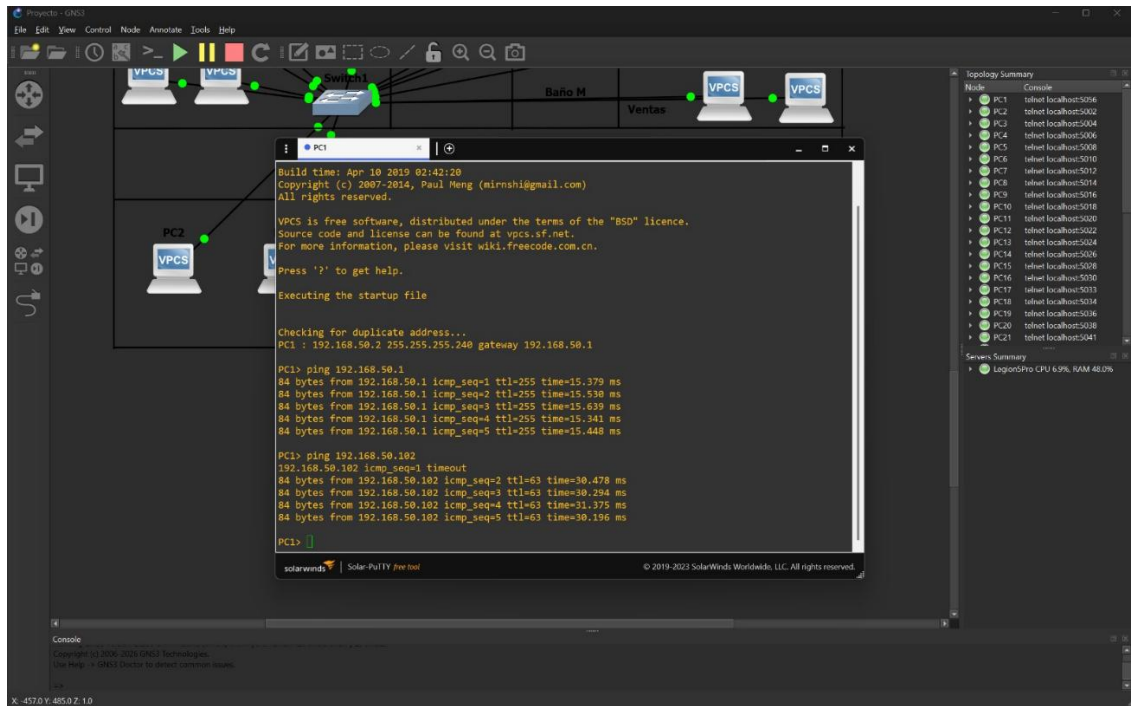


- Ping PC38 – PC1

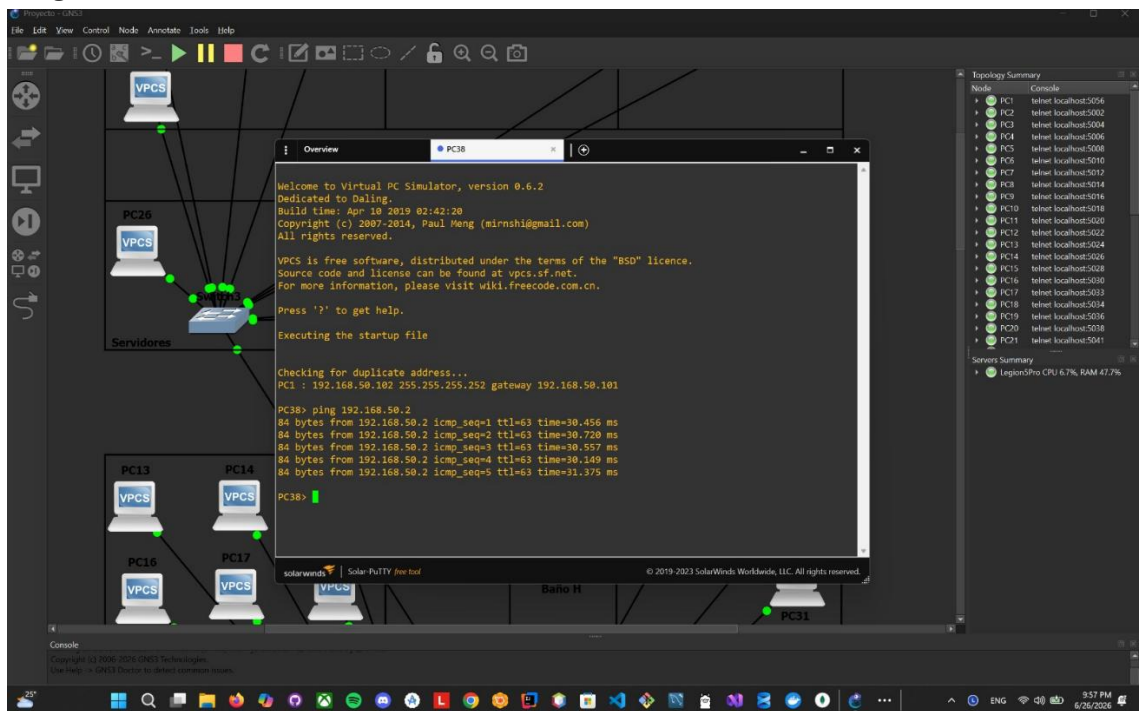

- Ping PC13 – PC23

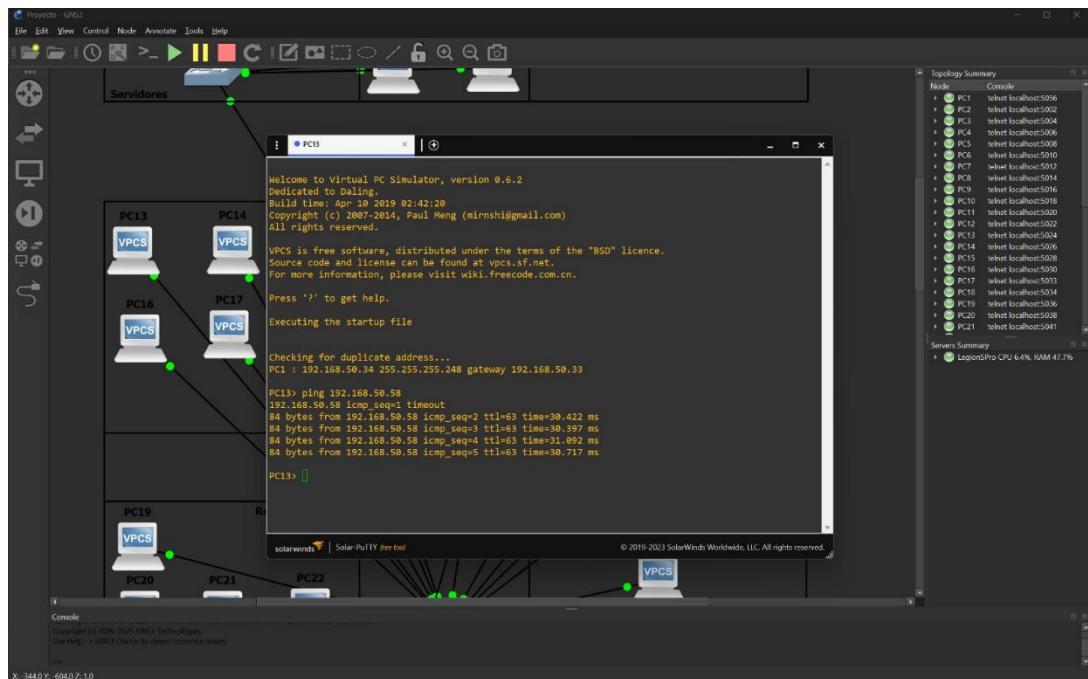

- Ping PC27 – PC36

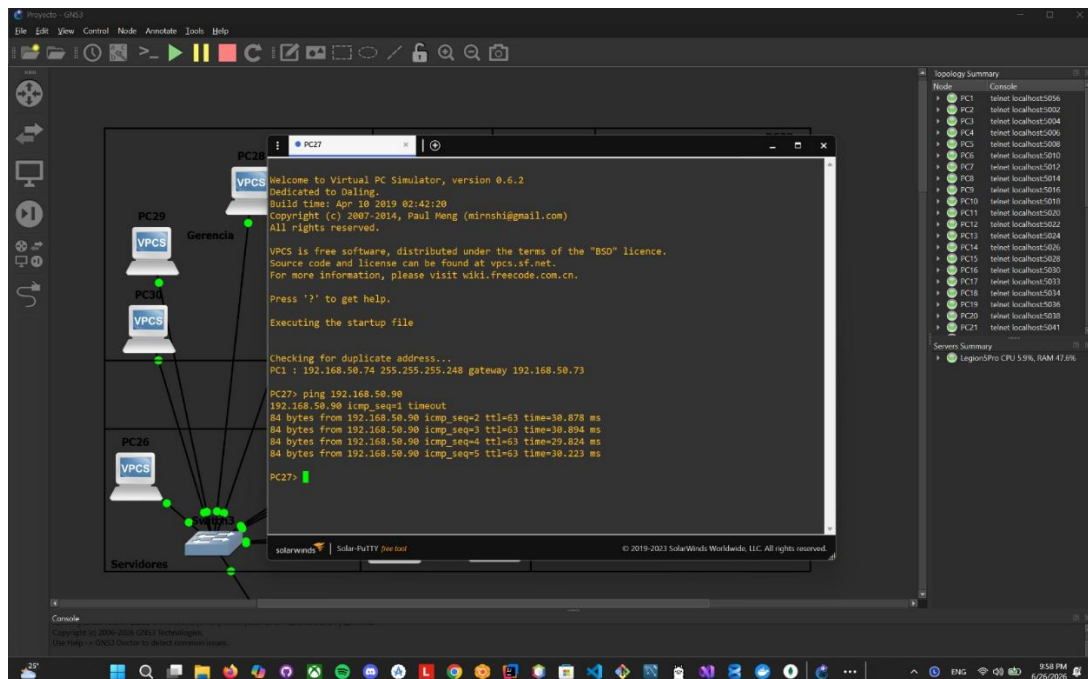

- Ping PC35 – PC7

