

Low Cost Probes for Continuous Monitoring and Optimisation of Wireless Network Performance

**João Simões
João Mendonça
Rodrigo Cerejeira**

1st Cycle Integrated Project in
Telecommunications and Informatics Engineering

Supervisor: Prof. Fernando Mira da Silva

June 2025

Declaration

I declare that this document is an original work of my own authorship and that it fulfills all the requirements of the Code of Conduct and Good Practices of the Universidade de Lisboa.

Dedicated to someone special...

Acknowledgments

A few words about the university, financial support, research advisor, dissertation readers, faculty or other professors, lab mates, other friends and family...

Resumo

Inserir o resumo em Português aqui com um máximo de 250 palavras e acompanhado de 4 a 6 palavras-chave.

Palavras-chave: palavra-chave1, palavra-chave2, palavra-chave3,...

Abstract

Insert your abstract here with a maximum of 250 words, followed by 4 to 6 keywords.

Keywords: keyword1, keyword2, keyword3,...

Contents

Acknowledgments	vii
Resumo	ix
Abstract	xi
List of Tables	xv
List of Figures	xvii
Nomenclature	xix
Glossary	xix
1 Introduction	1
1.1 Motivation	1
1.2 Topic Overview	1
1.3 Objectives and Deliverables	1
1.4 Thesis Outline	1
2 Background	3
2.1 Theoretical Overview	3
2.2 Theoretical Model 1	3
2.3 Theoretical Model 2	4
3 Implementation	5
3.1 Numerical Model	5
3.2 Verification and Validation	5
4 Results	7
4.1 Problem Description	7
4.2 Baseline Solution	7
4.3 Enhanced Solution	7
4.3.1 Figures	7
4.3.2 Equations	9
4.3.3 Tables	10
4.3.4 Mixing	10

5 Conclusions	13
5.1 Achievements	13
5.2 Future Work	13
Bibliography	15
A Vector calculus	19
A.1 Vector identities	19
B Technical Datasheets	21
B.1 Some Datasheet	21

List of Tables

4.1	Table caption shown in TOC.	10
4.2	Memory usage comparison (in MB).	10
4.3	Another table caption.	11
4.4	Yet another table caption.	11
4.5	Very wide table.	11

List of Figures

4.1	Optional caption for figure in TOC.	8
4.2	Examples of aircraft.	8
4.3	Schematic of some algorithm.	9
4.4	Figure and table side-by-side.	11

Chapter 1

Introduction

The increase in wireless communications whether because of mobile devices or because the Internet of Things (IoT) created new challenges. More and more it is important to make sure that connectivity is reliable, secure and efficient. However, the traditional methods of network monitorization are not affordable and flexible enough to meet the new requirements.

In this context, the opportunity arises to explore new alternatives to monitor and optimize wireless networks. Using Raspberry Pi devices, it is possible to create a low-cost and flexible solution at Instituto Superior Técnico (IST) - Oeiras.

1.1 Motivation

SSS

1.2 Topic Overview

Provide an overview of the topic to be studied.

1.3 Objectives and Deliverables

The main goal of this project besides developing new monitorization tools and analysis is also the creation of a new website useful to visualize the data collected by the devices. To store all this data, it is also necessary to create a database that allows efficient storage and retrieval of the data.

1.4 Thesis Outline

Briefly explain the contents of each chapter.

Chapter 2

Background

Insert your chapter material here.

2.1 Theoretical Overview

Some overview of the underlying theory about the topic...

Remember to define an acronym the first time it is used.

The full acronym can be Multidisciplinary Design Optimization (MDO), that includes both its long definition Multidisciplinary Design Optimization and short definition MDO.

2.2 Theoretical Model 1

The research should be supported with a comprehensive list of references. These should appear whenever necessary, in the limit, from the first to the last chapter.

A reference can be cited in any of the following ways:

- Citation mode #1 - [1]
- Citation mode #2 - Marta and Suleman [1]
- Citation mode #3 - [1]
- Citation mode #4 - Marta and Suleman [1]
- Citation mode #5 - [1]
- Citation mode #6 - Marta and Suleman 1
- Citation mode #7 - 1
- Citation mode #8 - Marta and Suleman
- Citation mode #9 - 2021

- Citation mode #10 - [2021]

The references may include books [1], articles in journals [2], part of a collection of books [3], articles in conferences [4], master theses [5] and PhD theses [6].

Several citations can be made simultaneously as [7, 8].

This is often the default bibliography style adopted (numbers following the citation order), according to the options:

```
\usepackage{natbib} in file Thesis_Preamble.tex,  
\bibliographystyle{abbrvnat} in file Thesis.tex.
```

Notice however that this style can be changed from numerical citation order to authors' last name with the options:

```
\usepackage[numbers]{natbib} in file Thesis_Preamble.tex,  
\bibliographystyle{abbrvnsrnat} in file Thesis.tex.
```

Multiple citations are compressed when using the `sort&compress` option when loading the `natbib` package as `\usepackage[numbers,sort&compress]{natbib}` in file `Thesis_Preamble.tex`, resulting in citations like [9–23].

2.3 Theoretical Model 2

Other models.

Chapter 3

Implementation

Insert your chapter material here.

3.1 Numerical Model

Description of the numerical implementation of the models explained in Chapter 2.

If needed, pseudo-codes can be included as exemplified in Algorithm 1.

Algorithm 1 Euclid's algorithm

1: procedure EUCLID(a, b)	▷ The g.c.d. of a and b
2: $r \leftarrow a \bmod b$	
3: while $r \neq 0$ do	▷ We have the answer if r is 0
4: $a \leftarrow b$	
5: $b \leftarrow r$	
6: $r \leftarrow a \bmod b$	
7: end while	
8: return b	▷ The gcd is b
9: end procedure	

3.2 Verification and Validation

Basic test cases to compare the implemented model against other numerical tools (verification) and experimental data (validation).

Chapter 4

Results

Insert your chapter material here.

4.1 Problem Description

Description of the baseline problem.

4.2 Baseline Solution

Analysis of the baseline solution.

4.3 Enhanced Solution

Quest for the optimal solution.

4.3.1 Figures

Insert your section material and possibly a few figures.

Make sure all figures presented are referenced in the text!

The caption should appear below the figure.

Images

By default, this document supports file types *.png*, *.pdf*, *.jpg*, *.jpeg*.

See the documentation of package *graphicx* <https://www.ctan.org/tex-archive/macros/latex/required/graphics/> for other extensions support.

When referencing a figure, use the abbreviation Fig., unless it is the beginning of a sentence.

Figure 4.1 is an example and so is Fig. 4.2.



Figure 4.1: Caption for figure.

It is possible to include subfigures. Figure 4.2 is composed of three subfigures: Fig. 4.2a, 4.2b and 4.2c.



]fig1a

(a) Airbus A320.



(b) Bombardier CRJ200.



(c) Airbus A350.

Figure 4.2: Examples of aircraft.

Most aircraft have wings with large aspect ratios ($\mathcal{A}R= 8 - 15$) for higher aerodynamic efficiency.

Drawings

Insert your subsection material and for instance a few drawings.

The schematic illustrated in Fig. 4.3 can represent some sort of algorithm.

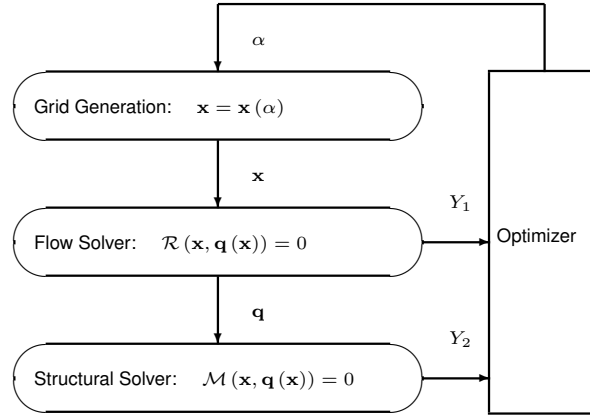


Figure 4.3: Schematic of some algorithm.

4.3.2 Equations

Equations can be inserted in different ways.

The simplest way is in a separate line as

$$\frac{dq_{ijk}}{dt} + \mathcal{R}_{ijk}(\mathbf{q}) = 0, \quad (4.1)$$

where each variable must properly defined.

If the equation is to be embedded in the text, it can be done like $\partial \mathcal{R} / \partial \mathbf{q} = 0$.

It may also be split in different lines like

$$\begin{aligned} &\text{Minimize} && Y(\boldsymbol{\alpha}, \mathbf{q}(\boldsymbol{\alpha})) \\ &\text{with respect to} && \boldsymbol{\alpha} \\ &\text{subject to} && \mathcal{R}(\boldsymbol{\alpha}, \mathbf{q}(\boldsymbol{\alpha})) = 0 \\ &&& C(\boldsymbol{\alpha}, \mathbf{q}(\boldsymbol{\alpha})) = 0. \end{aligned} \quad (4.2)$$

It is also possible to use subequations.

$$\frac{\partial \rho}{\partial t} + \frac{\partial}{\partial x_j} (\rho u_j) = 0, \quad (4.3a)$$

$$\frac{\partial}{\partial t} (\rho u_i) + \frac{\partial}{\partial x_j} (\rho u_i u_j + p \delta_{ij} - \tau_{ji}) = 0, \quad i = 1, 2, 3, \quad (4.3b)$$

$$\frac{\partial}{\partial t} (\rho E) + \frac{\partial}{\partial x_j} (\rho E u_j + p u_j - u_i \tau_{ij} + q_j) = 0. \quad (4.3c)$$

Notice that the equations should be punctuated as they are part of sentences, so a comma or a period should be put at the end of each of them, as exemplified in all the previous equations.

When referencing an equation, use the abbreviation Eq., unless it is the beginning of a sentence. The number of the equation should always be in parenthesis.

Equations (4.3a), (4.3b) and (4.3c) form the Navier–Stokes equations (Eq. (4.3)).

4.3.3 Tables

Insert your subsection material and for instance a few tables.

Make sure all tables presented are referenced in the text!

The caption should appear above the table.

Follow some guidelines when making tables:

- Avoid vertical lines;
- Avoid “boxing up” cells, usually 3 horizontal lines are enough: above, below, and after heading;
- Avoid double horizontal lines;
- Add enough space between rows.

Table 4.1: Table caption.

Model	C_L	C_D	C_{My}
Euler	0.083	0.021	-0.110
Navier–Stokes	0.078	0.023	-0.101

When referencing a table, use the abbreviation Tab., unless it is the beginning of a sentence.

Tables 4.2 and 4.3 are examples of tables with merging columns:

Table 4.2: Memory usage comparison (in MB).

	Virtual memory [MB]	
	Euler	Navier–Stokes
Wing only	1,000	2,000
Aircraft	5,000	10,000
(ratio)	5.0×	5.0×

An example with merging rows can be seen in Tab. 4.4.

If a table has too many columns, it can be scaled to fit the text width, as in Tab. 4.5.

4.3.4 Mixing

If necessary, a figure and a table can be put side-by-side as in Fig. 4.4

Table 4.3: Another table caption.

		<i>w</i> = 2			<i>w</i> = 4		
		<i>t</i> = 0	<i>t</i> = 1	<i>t</i> = 2	<i>t</i> = 0	<i>t</i> = 1	<i>t</i> = 2
<i>dir</i> = 1							
	<i>c</i>	0.07	0.16	0.29	0.36	0.71	3.18
	<i>c</i>	-0.86	50.04	5.93	-9.07	29.09	46.21
	<i>c</i>	14.27	-50.96	-14.27	12.22	-63.54	-381.09
<i>dir</i> = 0							
	<i>c</i>	0.03	1.24	0.21	0.35	-0.27	2.14
	<i>c</i>	-17.90	-37.11	8.85	-30.73	-9.59	-3.00
	<i>c</i>	105.55	23.11	-94.73	100.24	41.27	-25.73

Table 4.4: Yet another table caption.

ABC	header			
	1.1	2.2	3.3	4.4
IJK	group	0.5		0.6
		0.7		1.2

Table 4.5: Very wide table.

Variable	a	b	c	d	e	f	g	h	i	j
Test 1	10,000	20,000	30,000	40,000	50,000	60,000	70,000	80,000	90,000	100,000
Test 2	20,000	40,000	60,000	80,000	100,000	120,000	140,000	160,000	180,000	200,000



Legend		
A	B	C
0	0	0
0	1	0
1	0	0
1	1	1

Figure 4.4: Figure and table side-by-side.

Chapter 5

Conclusions

Insert your chapter material here.

5.1 Achievements

The major achievements of the present work.

5.2 Future Work

A few ideas for future work.

Bibliography

- [1] A. C. Marta and A. Suleman, editors. *Proceedings of the AeroBest 2021 - International Conference on Multidisciplinary Design Optimization of Aerospace Systems*. ECCOMAS Thematic Conference. IDMEC, Lisboa, Portugal, 1st edition, July 2021. ISBN:978-989-99424-8-6.
- [2] F. Morgado, A. C. Marta, and P. Gil. Coupled preliminary design and trajectory optimization of rockets using a multidisciplinary approach. *Structural and Multidisciplinary Optimization*, 65(192): 1–31, Feb. 2022. ISSN 1615-147X. doi: 10.1007/s00158-022-03285-y. URL <https://link.springer.com/article/10.1007/s00158-022-03285-y>. doi:10.1007/s00158-022-03285-y.
- [3] A. Jameson, N. A. Pierce, and L. Martinelli. Optimum aerodynamic design using the Navier–Stokes equations. In *Theoretical and Computational Fluid Dynamics*, volume 10, pages 213–237. Springer-Verlag GmbH, Jan. 1998.
- [4] B. M. Alves, A. C. Marta, and L. F. Félix. Multidisciplinary optimisation of an eVTOL UAV with a hydrogen fuel cell. In *Proceedings of the ICUAS 2022 - International Conference on Unmanned Aircraft Systems*, Dubrovnik, Croatia, June 2022.
- [5] J. Pacheco. Wind tunnel testing of a complete formula student vehicle. MSc Thesis in Mechanical Engineering, Instituto Superior Técnico, Lisboa, Portugal, June 2022.
- [6] S. Rodrigues. *Aero-thermal analysis and design of turbomachinery blades using multi-stage adjoint methods*. PhD Thesis in Aerospace Engineering, Instituto Superior Técnico, Lisboa, Portugal, April 2019.
- [7] L. M. B. C. Campos and A. C. Marta. On the vibrations of pyramidal beams with rectangular cross-section and application to unswept wings. *Quarterly Journal Of Mechanics And Applied Mathematics*, 74(1):1–31, Feb. 2021. ISSN 0033-5614. doi: 10.1093/qjmam/hbaa017. URL <https://academic.oup.com/qjmam/article-abstract/74/1/1/6126085>. doi:10.1093/qjmam/hbaa017.
- [8] D. Alexandre, L. Marino, A. C. Marta, G. Graziani, and R. Piva. On the feasibility of Rayleigh cycles for dynamic soaring trajectories. *PLoS One*, 15(3):e0229746, Mar. 2020. ISSN 1932-6203. doi: 10.1371/journal.pone.0229746. URL <https://journals.plos.org/plosone/article?id=10.1371/journal.pone.0229746>. doi:10.1371/journal.pone.0229746.
- [9] J. Pacheco, A. C. Marta, and L. Eça. Wind tunnel testing of a formula student vehicle for checking cfd simulation trends. *Proceedings of the Institution of Mechanical Engineers, Part*

- D: Journal of Automobile Engineering*, 0(0):1–17, Jan. 2024. ISSN 0954-4070. doi: 10.1177/09544070231203076. URL <https://journals.sagepub.com/doi/10.1177/09544070231203076>. doi:10.1177/09544070231203076.
- [10] M. Portugal and A. C. Marta. Optimal multi-sensor obstacle detection system for small fixed-wing uavs. *Modelling*, 5(1):16–36, Jan. 2024. ISSN 2673-3951. doi: 10.3390/modelling5010002. URL <https://www.mdpi.com/2673-3951/5/1/2>. doi:10.3390/modelling5010002.
- [11] N. M. B. Matos and A. C. Marta. Concurrent trajectory optimization and aircraft design for the air cargo challenge competition. *Aerospace*, 9(7):378, July 2022. ISSN 2226-4310. doi: 10.3390/aerospace9070378. URL <https://www.mdpi.com/2226-4310/9/7/378>. doi:10.3390/aerospace9070378.
- [12] S. S. Rodrigues and A. C. Marta. Adjoint-based shape sensitivity of multi-row turbomachinery. *Structural and Multidisciplinary Optimization*, 61(2):837–853, Feb. 2020. ISSN 1615-147X. doi: 10.1007/s00158-019-02386-5. URL <https://link.springer.com/article/10.1007/s00158-019-02386-5>. doi:10.1007/s00158-019-02386-5.
- [13] S. S. Rodrigues and A. C. Marta. On addressing wind turbine noise with after-market shape blade add-ons. *Renewable Energy*, 140:602–614, Sept. 2019. ISSN 0960-1481. doi: 10.1016/j.renene.2019.03.056. URL <https://www.sciencedirect.com/science/article/pii/S0960148119303611>. doi:10.1016/j.renene.2019.03.056.
- [14] L. M. B. C. Campos and A. C. Marta. On the extension of cylindrical acoustic waves to acoustic-vortical-entropy waves in a flow with rigid body swirl. *Journal of Sound and Vibration*, 437:389–409, Dec. 2018. ISSN 0022-460X. doi: 10.1016/j.jsv.2018.09.017. URL <https://www.sciencedirect.com/science/article/pii/S0022460X18305960>. doi:10.1016/j.jsv.2018.09.017.
- [15] S. S. Rodrigues and A. C. Marta. Adjoint formulation of a steady multistage turbomachinery interface using automatic differentiation. *Computer and Fluids*, 176:182–192, Nov. 2018. ISSN 0045-7930. doi: 10.1016/j.compfluid.2018.09.015. URL <https://www.sciencedirect.com/science/article/pii/S0045793018306625>. doi:10.1016/j.compfluid.2018.09.015.
- [16] L. M. B. C. Campos and A. C. Marta. On the combined effect of atmospheric stratification and non-uniform magnetic field on magneto-sonic-gravity waves. *Geophysical & Astrophysical Fluid Dynamics*, 109(2):168–198, Apr. 2015. ISSN 1029-0419. doi: 10.1080/03091929.2015.1032959. URL <http://www.tandfonline.com/doi/full/10.1080/03091929.2015.1032959>. doi:10.1080/03091929.2015.1032959.
- [17] A. C. Marta and S. Shankaran. Assessing turbomachinery performance sensitivity to boundary conditions using control theory. *AIAA Journal of Propulsion and Power*, 30(5):1281–1294, Sept. 2014. ISSN 0748-4658. doi: 10.2514/1.B35087. URL <http://arc.aiaa.org/doi/abs/10.2514/1.B35087>. doi:10.2514/1.B35087.

- [18] S. S. Rodrigues and A. C. Marta. On addressing noise constraints in the design of wind turbine blades. *Structural and Multidisciplinary Optimization*, 50(3):489–503, Sept. 2014. ISSN 1615-1488. doi: 10.1007/s00158-014-1072-4. URL <http://link.springer.com/article/10.1007%2Fs00158-014-1072-4>. doi:10.1007/s00158-014-1072-4.
- [19] L. M. B. C. Campos and A. C. Marta. On the prevention or facilitation of buckling of beams. *International Journal of Mechanical Sciences*, 79:95–104, Feb. 2014. ISSN 0020-7403. doi: 10.1016/j.ijmecsci.2013.12.003. URL <http://www.sciencedirect.com/science/article/pii/S002074031300338X>. doi:10.1016/j.ijmecsci.2013.12.003.
- [20] A. C. Marta, S. Shankaran, P. Venugopal, B. Barr, and Q. Wang. Interpretation of adjoint solutions for turbomachinery flows. *AIAA Journal*, 51(7):1733–1744, July 2013. ISSN 0001-1452. doi: 10.2514/1.J052177. URL <http://arc.aiaa.org/doi/pdf/10.2514/1.J052177>. doi:10.2514/1.J052177.
- [21] A. C. Marta and S. Shankaran. On the handling of turbulence equations in RANS adjoint solvers. *Computers & Fluids*, 74:102–113, Mar. 2013. ISSN 0045-7930. doi: 10.1016/j.compfluid.2013.01.012. URL <http://www.sciencedirect.com/science/article/pii/S0045793013000303>. doi:10.1016/j.compfluid.2013.01.012.
- [22] A. C. Marta and J. J. Alonso. Toward optimally seeded airflow on hypersonic vehicles using control theory. *Computers & Fluids*, 39(9):1562–1574, Oct. 2010. ISSN 0045-7930. doi: 10.1016/j.compfluid.2010.05.009. URL <http://www.sciencedirect.com/science/article/pii/S0045793010001155>. doi:10.1016/j.compfluid.2010.05.009.
- [23] A. C. Marta, C. A. Mader, J. R. R. A. Martins, E. van der Weide, and J. J. Alonso. A methodology for the development of discrete adjoint solvers using automatic differentiation tools. *International Journal of Computational Fluid Dynamics*, 21(9–10):307–327, Oct. 2007. ISSN 1061-8562. doi: 10.1080/10618560701678647. URL <http://www.tandfonline.com/doi/pdf/10.1080/10618560701678647>. doi:10.1080/10618560701678647.

Appendix A

Vector calculus

In case an appendix is deemed necessary, the whole document cannot exceed a total of 100 pages (in arabic page numbering).

Some definitions and vector identities are listed in the section below.

A.1 Vector identities

$$\nabla \times (\nabla \phi) = 0 \tag{A.1}$$

$$\nabla \cdot (\nabla \times \mathbf{u}) = 0 \tag{A.2}$$

Appendix B


Technical Datasheets

It is possible to add PDF files to the document, such as technical sheets of some equipment used in the work.

B.1 Some Datasheet

See more options to include PDF files in <https://www.ctan.org/pkg/pdfpages>

Lightweight scanning lidar

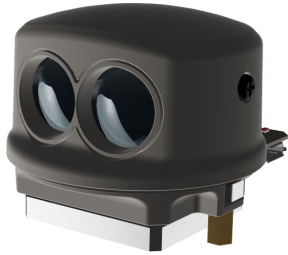

Features

- Application:** Obstacle detection and navigation for small autonomous vehicles and drones
- Key features:** Small and lightweight
Upgradable through the **LightWare Studio** application
- Measuring range:** 0.2 ... 50 m (80% reflective, large target)
- Size:** 53 mm x 44 mm x 37 mm
- Weight:** 48.3 grams
- Measuring speed:** Up to 20,000 points per second (configurable)
- Interfaces:** Serial, I2C and USB
- Integration:** User APIs, **LightWare Studio**
- Safety:** Eye safe laser emission Class 1M
- Environmental:** Open frame, no IP rating



1 of 8

SF45/B scanning lidar sensor - Datasheet (Rev 1) | © LightWare Optoelectronics (Pty) Ltd, 2019 | www.lightware.co.za

1. Overview

The SF45/B is a small, lightweight scanning lidar ideal for obstacle detection by small autonomous vehicles. The horizontal field of view can be adjusted from a few degrees up to 320 degrees to suit the application. Objects up to 50m away can be detected and avoided by finding clear pathways using simple navigation commands. The SF45/B is tolerant to changes in background lighting conditions, wind and noise.

The following capabilities are included in the SF45/B as standard:

- Streaming of live readings.
- Alarms when an obstacle is detected.
- Configurable update rate and scanning angle.
- Internal status monitoring.

Additional features may be added through **LightWare Studio**:

- Servo driver for a second axis of motion.
- Measurement to the nearest detected surface (first return).
- Measurement to the farthest detected surface (last return).
- Selectable filters to adjust the dynamic response to moving targets.
- Navigation tools.
- Custom features.

The following communication interfaces are available:

- A micro USB port that connects to a PC running the **LightWare Studio** application for visualisation of results, to make configuration changes and for upgrading the firmware.
- A serial port (3.3V logic level) with configurable baud rate to connect to a host controller.
- An I2C serial bus (3.3V logic level, external pull up resistors required) with configurable address as an alternative to the serial port when multiple devices are connected on a common bus.
- Two general purpose outputs.

Application software support is available from the LightWare **API** repository.

The SF45/B scanning lidar is rated laser Class 1M eye safe. Do not view the laser with magnifying optics such as microscopes, binoculars or telescopes.

3 of 8

SF45/B scanning lidar sensor - Datasheet (Rev 1) | © LightWare Optoelectronics (Pty) Ltd, 2019 | www.lightware.co.za

Table of contents

Overview	3
Specifications	4
Quickstart guide	5
Safety instructions	6
Labelling	6
Laser radiation information	6
Hardware	7
Dimension drawings	7
Revision history	7

Product ordering codes

Model family	Model name	Model description
SF45	SF45/B (50 m)	Open frame scanning lidar sensor, max 50 m

Disclaimer

Information found in this document is used entirely at the reader's own risk and whilst every effort has been made to ensure its validity, neither LightWare Optoelectronics (Pty) Ltd nor its representatives make any warranties with respect to the accuracy of the information contained herein.

2 of 8

SF45/B scanning lidar sensor - Datasheet (Rev 1) | © LightWare Optoelectronics (Pty) Ltd, 2019 | www.lightware.co.za

2. Specifications

Performance	
Range	0.2 ... 50 m (white wall in daylight conditions)
Linear Resolution	1 cm
Angular Resolution	< 0.2 deg
Update rate	Up to 20,000 readings per second and 5 sweeps per second.
Accuracy	±10 cm
Connections	
Power supply voltage	4.5 V ... 5.5 V
Power supply current	300 mA (typical)
Outputs & interfaces	Serial and I2C (3.3 V), micro USB, general purpose outputs
Mechanical	
Dimensions	53 mm x 44 mm x 37 mm
Weight	48g (excluding cables)
Optical	
Laser safety	Class 1M (refer to www.lightware.co.za/safety for full details)
Optical aperture	28 mm x 15 mm
Beam divergence	< 0.5°
Environmental	
Operating temperature	-10 ... +50°C
Approvals	FDA: 1710193-000 (2019/08)
Enclosure rating	N/A
Accessories	
Main cable	7 way - individual wires, unterminated
USB cable	USB cable - DigiKey AE10418-ND
Default settings	
Serial port settings	115200 baud, 8 data bits, 1 stop bit, no parity, no handshaking
I2C address	0x66 (Hex), 102 (Dec)
Update rate	388 readings per second
Main cable connections	
1	GPIO / LED driver
2	GPIO / servo driver
3	TXD/SDA - serial data transmit or I2C data
4	RXD/SCL - serial data receive or I2C clock
5	GND - power supply negative
6	GND - power supply negative
7	+ 5 V - power supply positive (4.5 V to 5.5 V at 500 mA)

4 of 8

SF45/B scanning lidar sensor - Datasheet (Rev 1) | © LightWare Optoelectronics (Pty) Ltd, 2019 | www.lightware.co.za