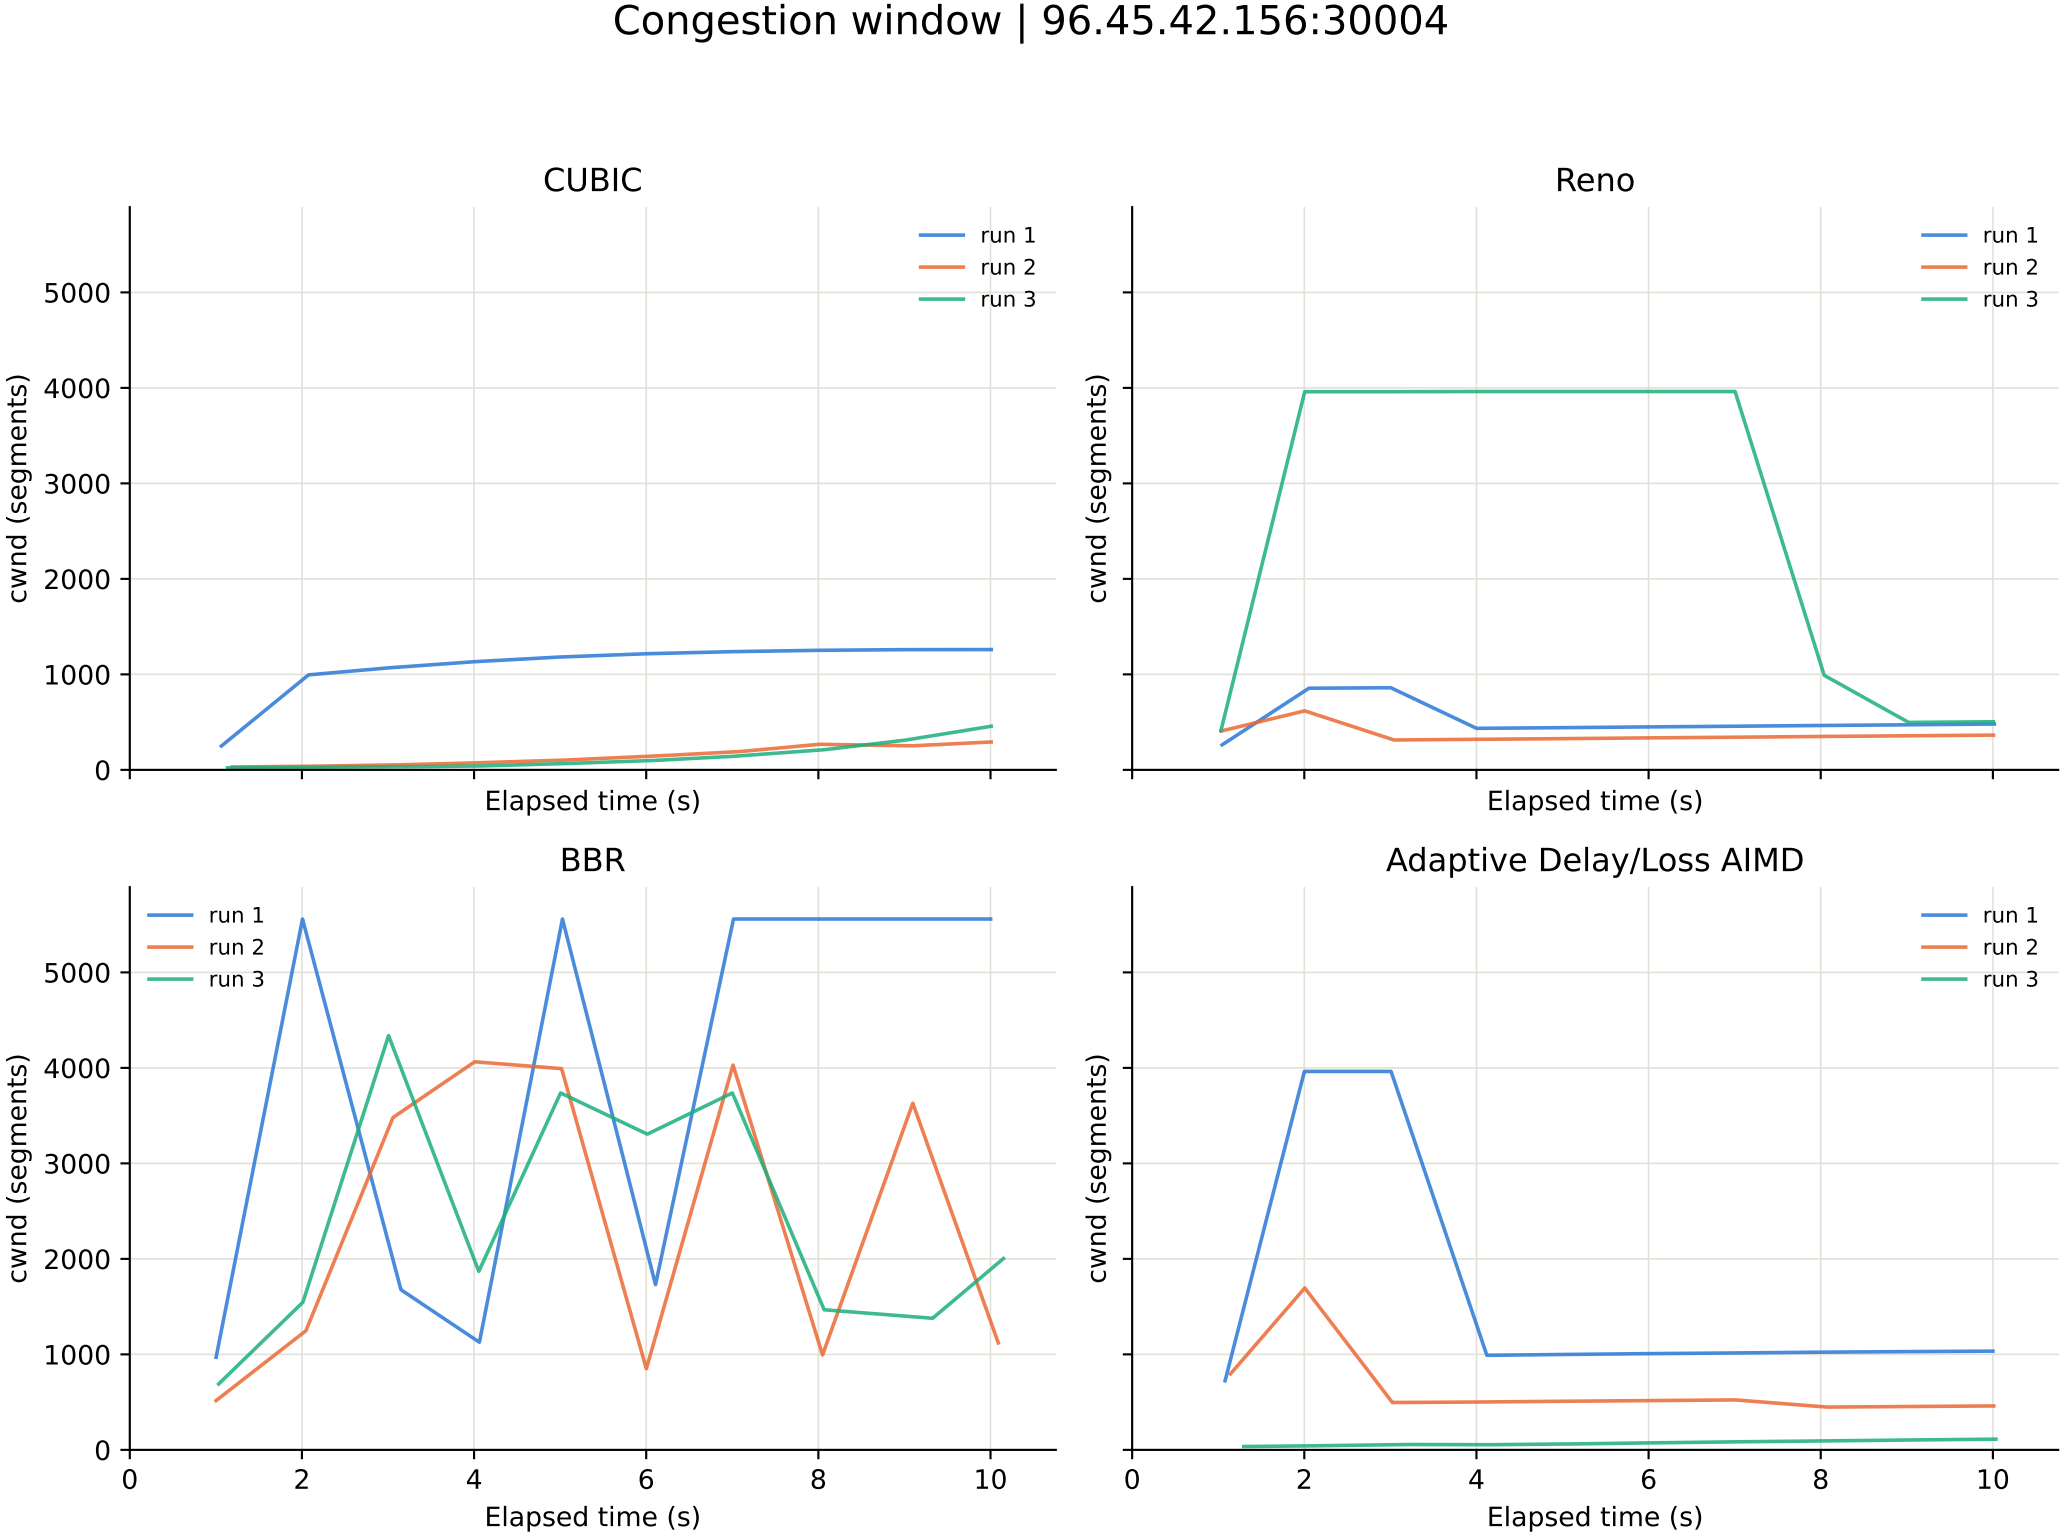
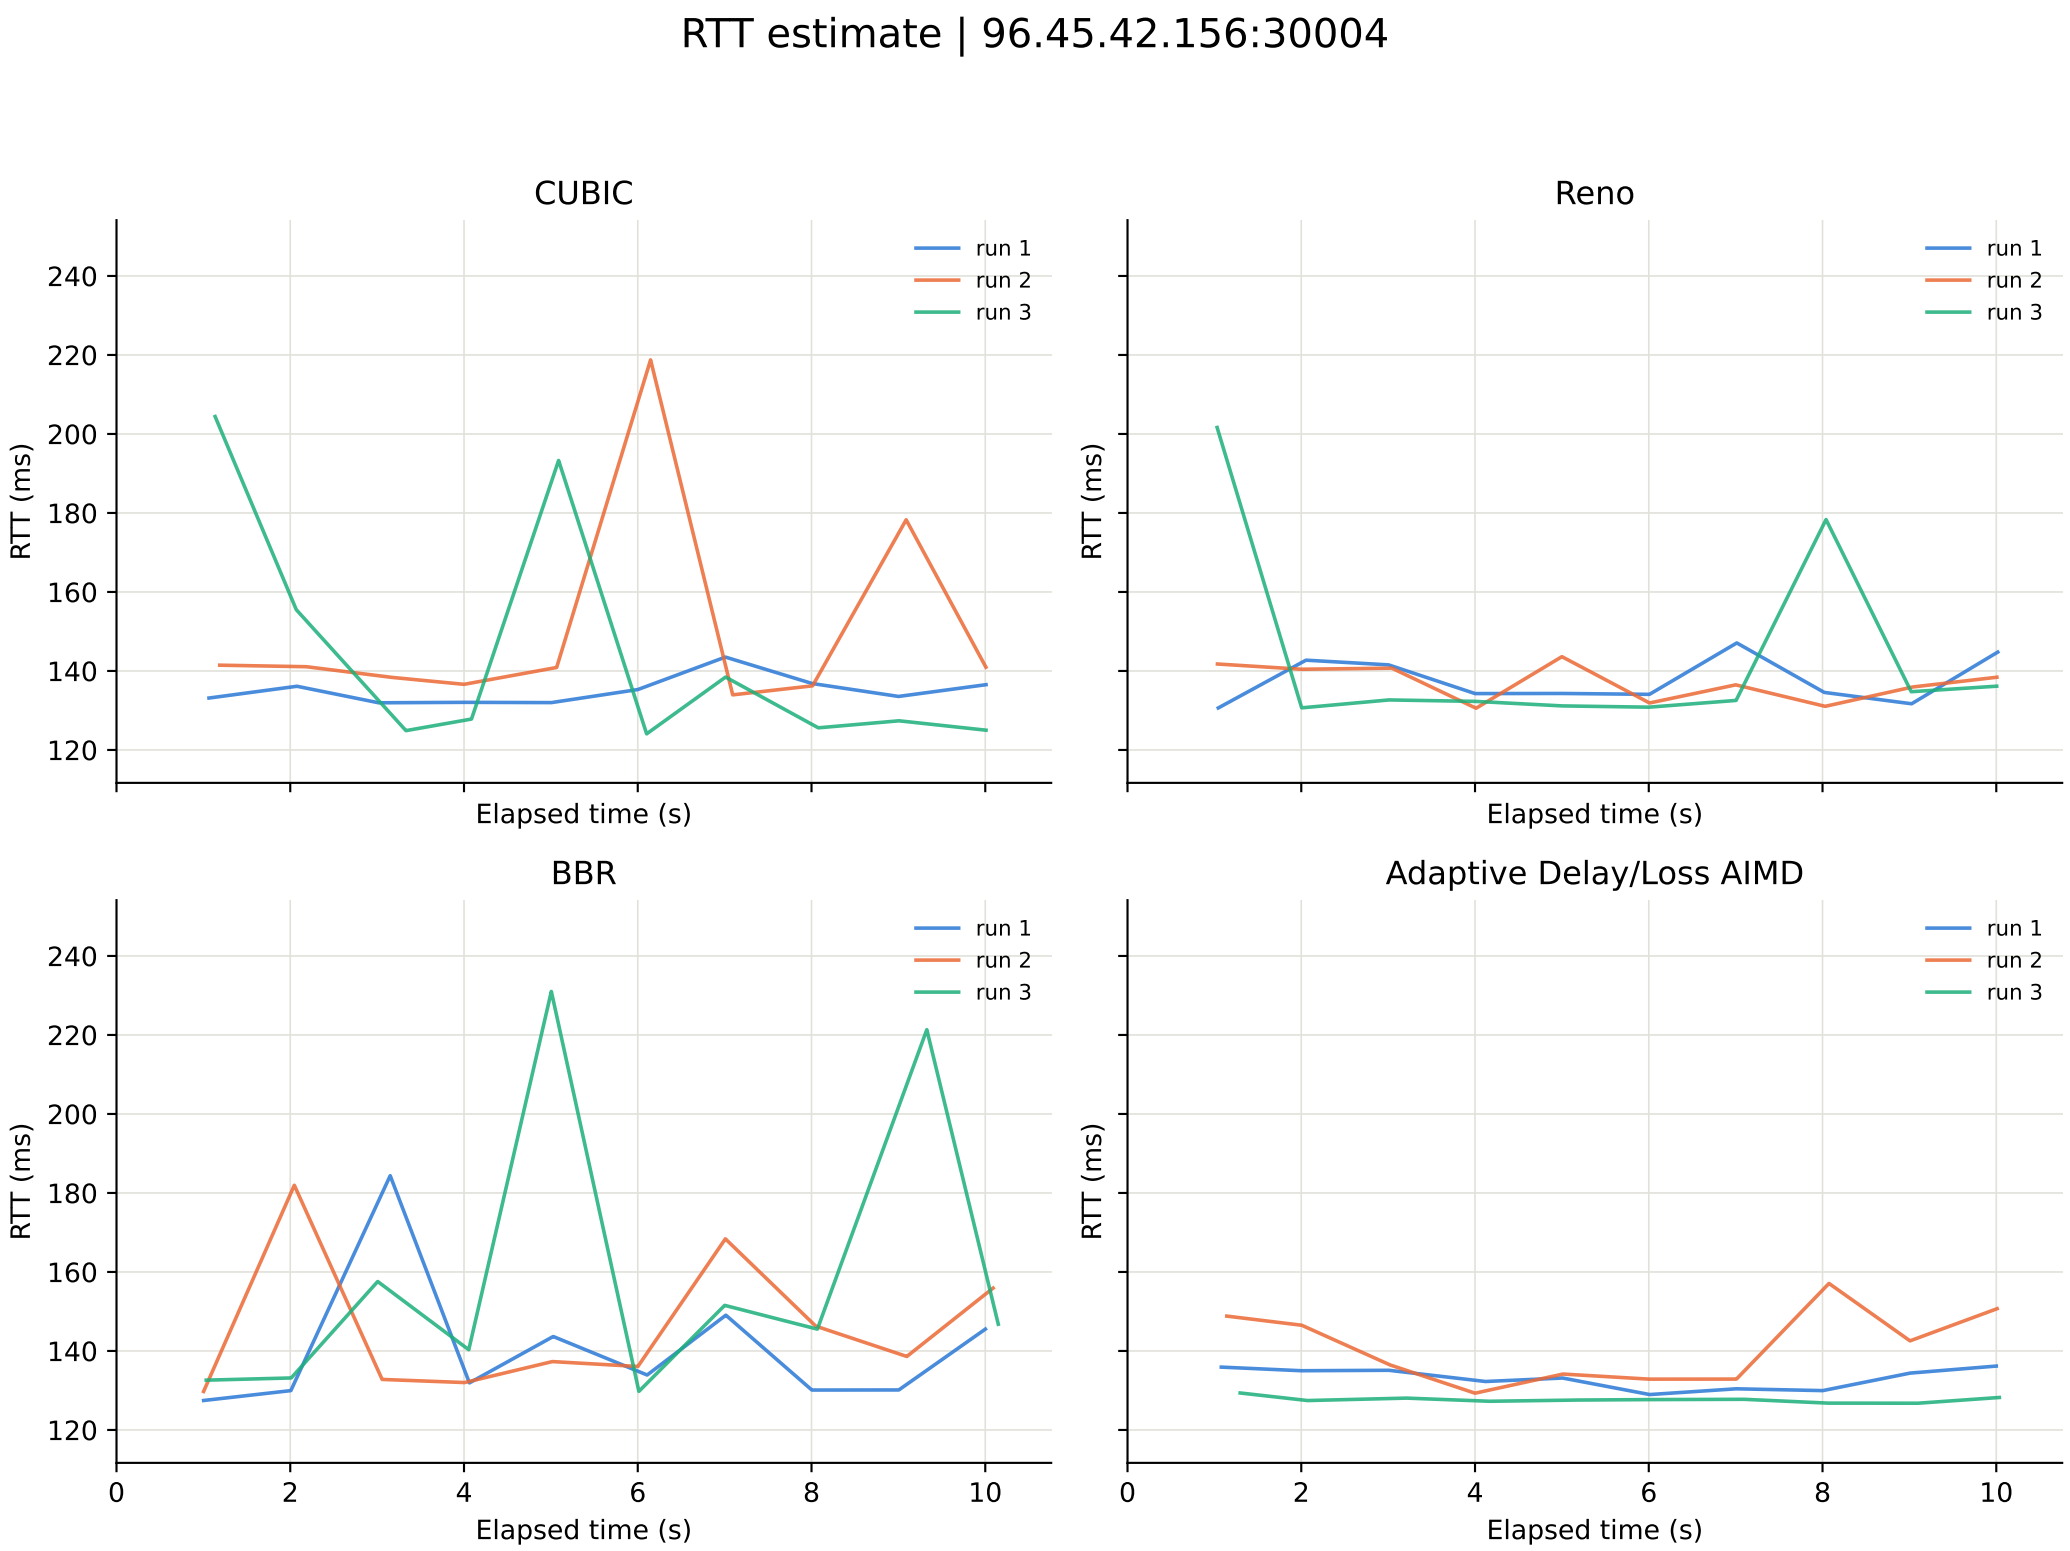
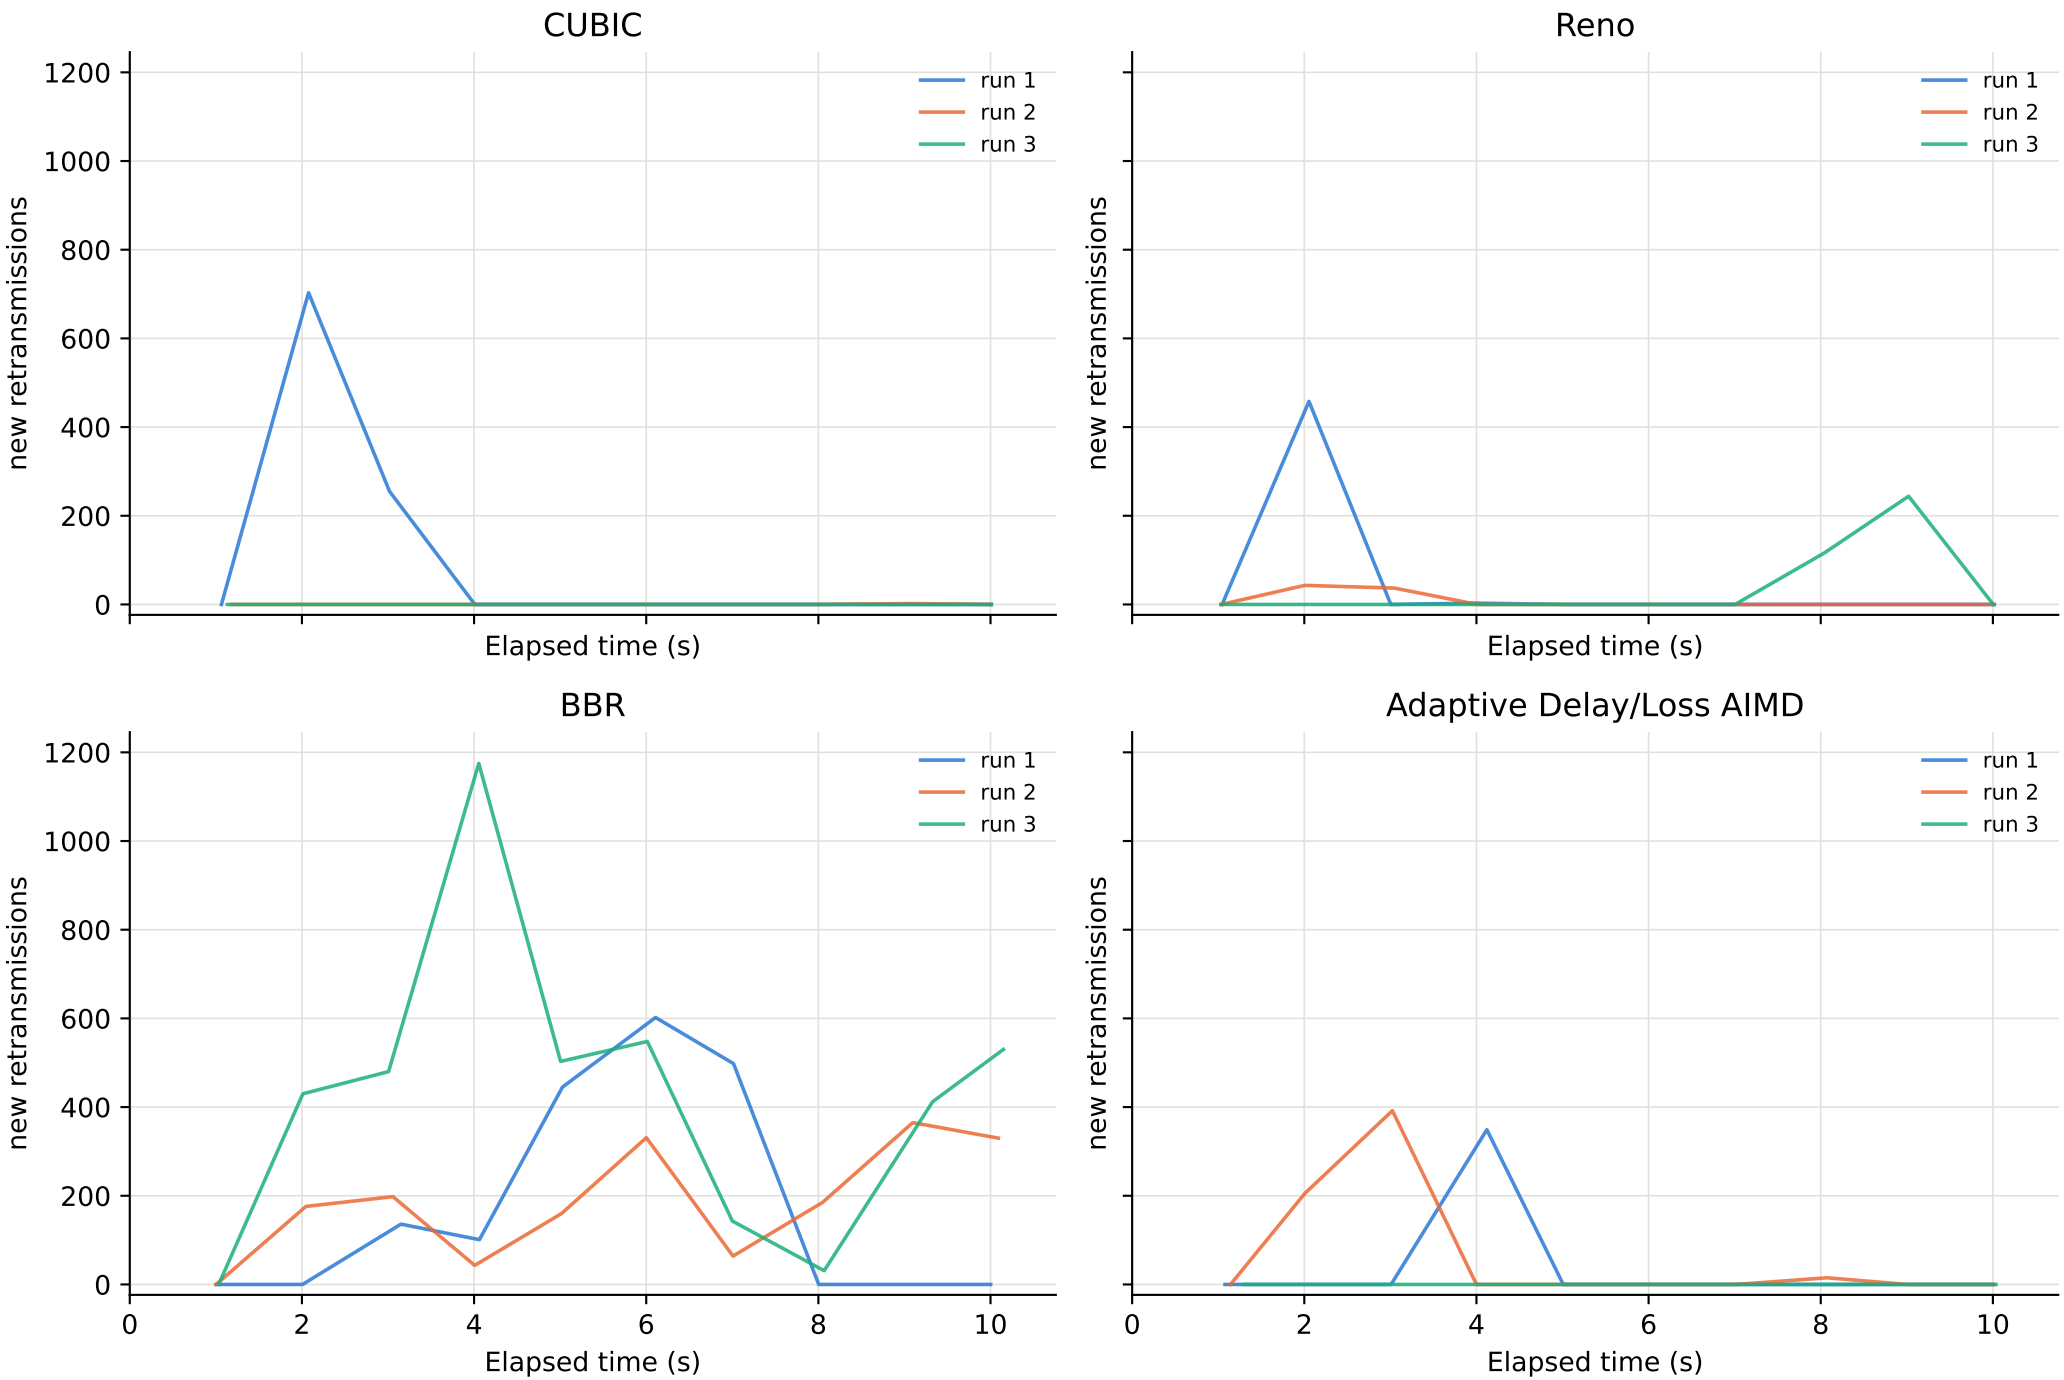
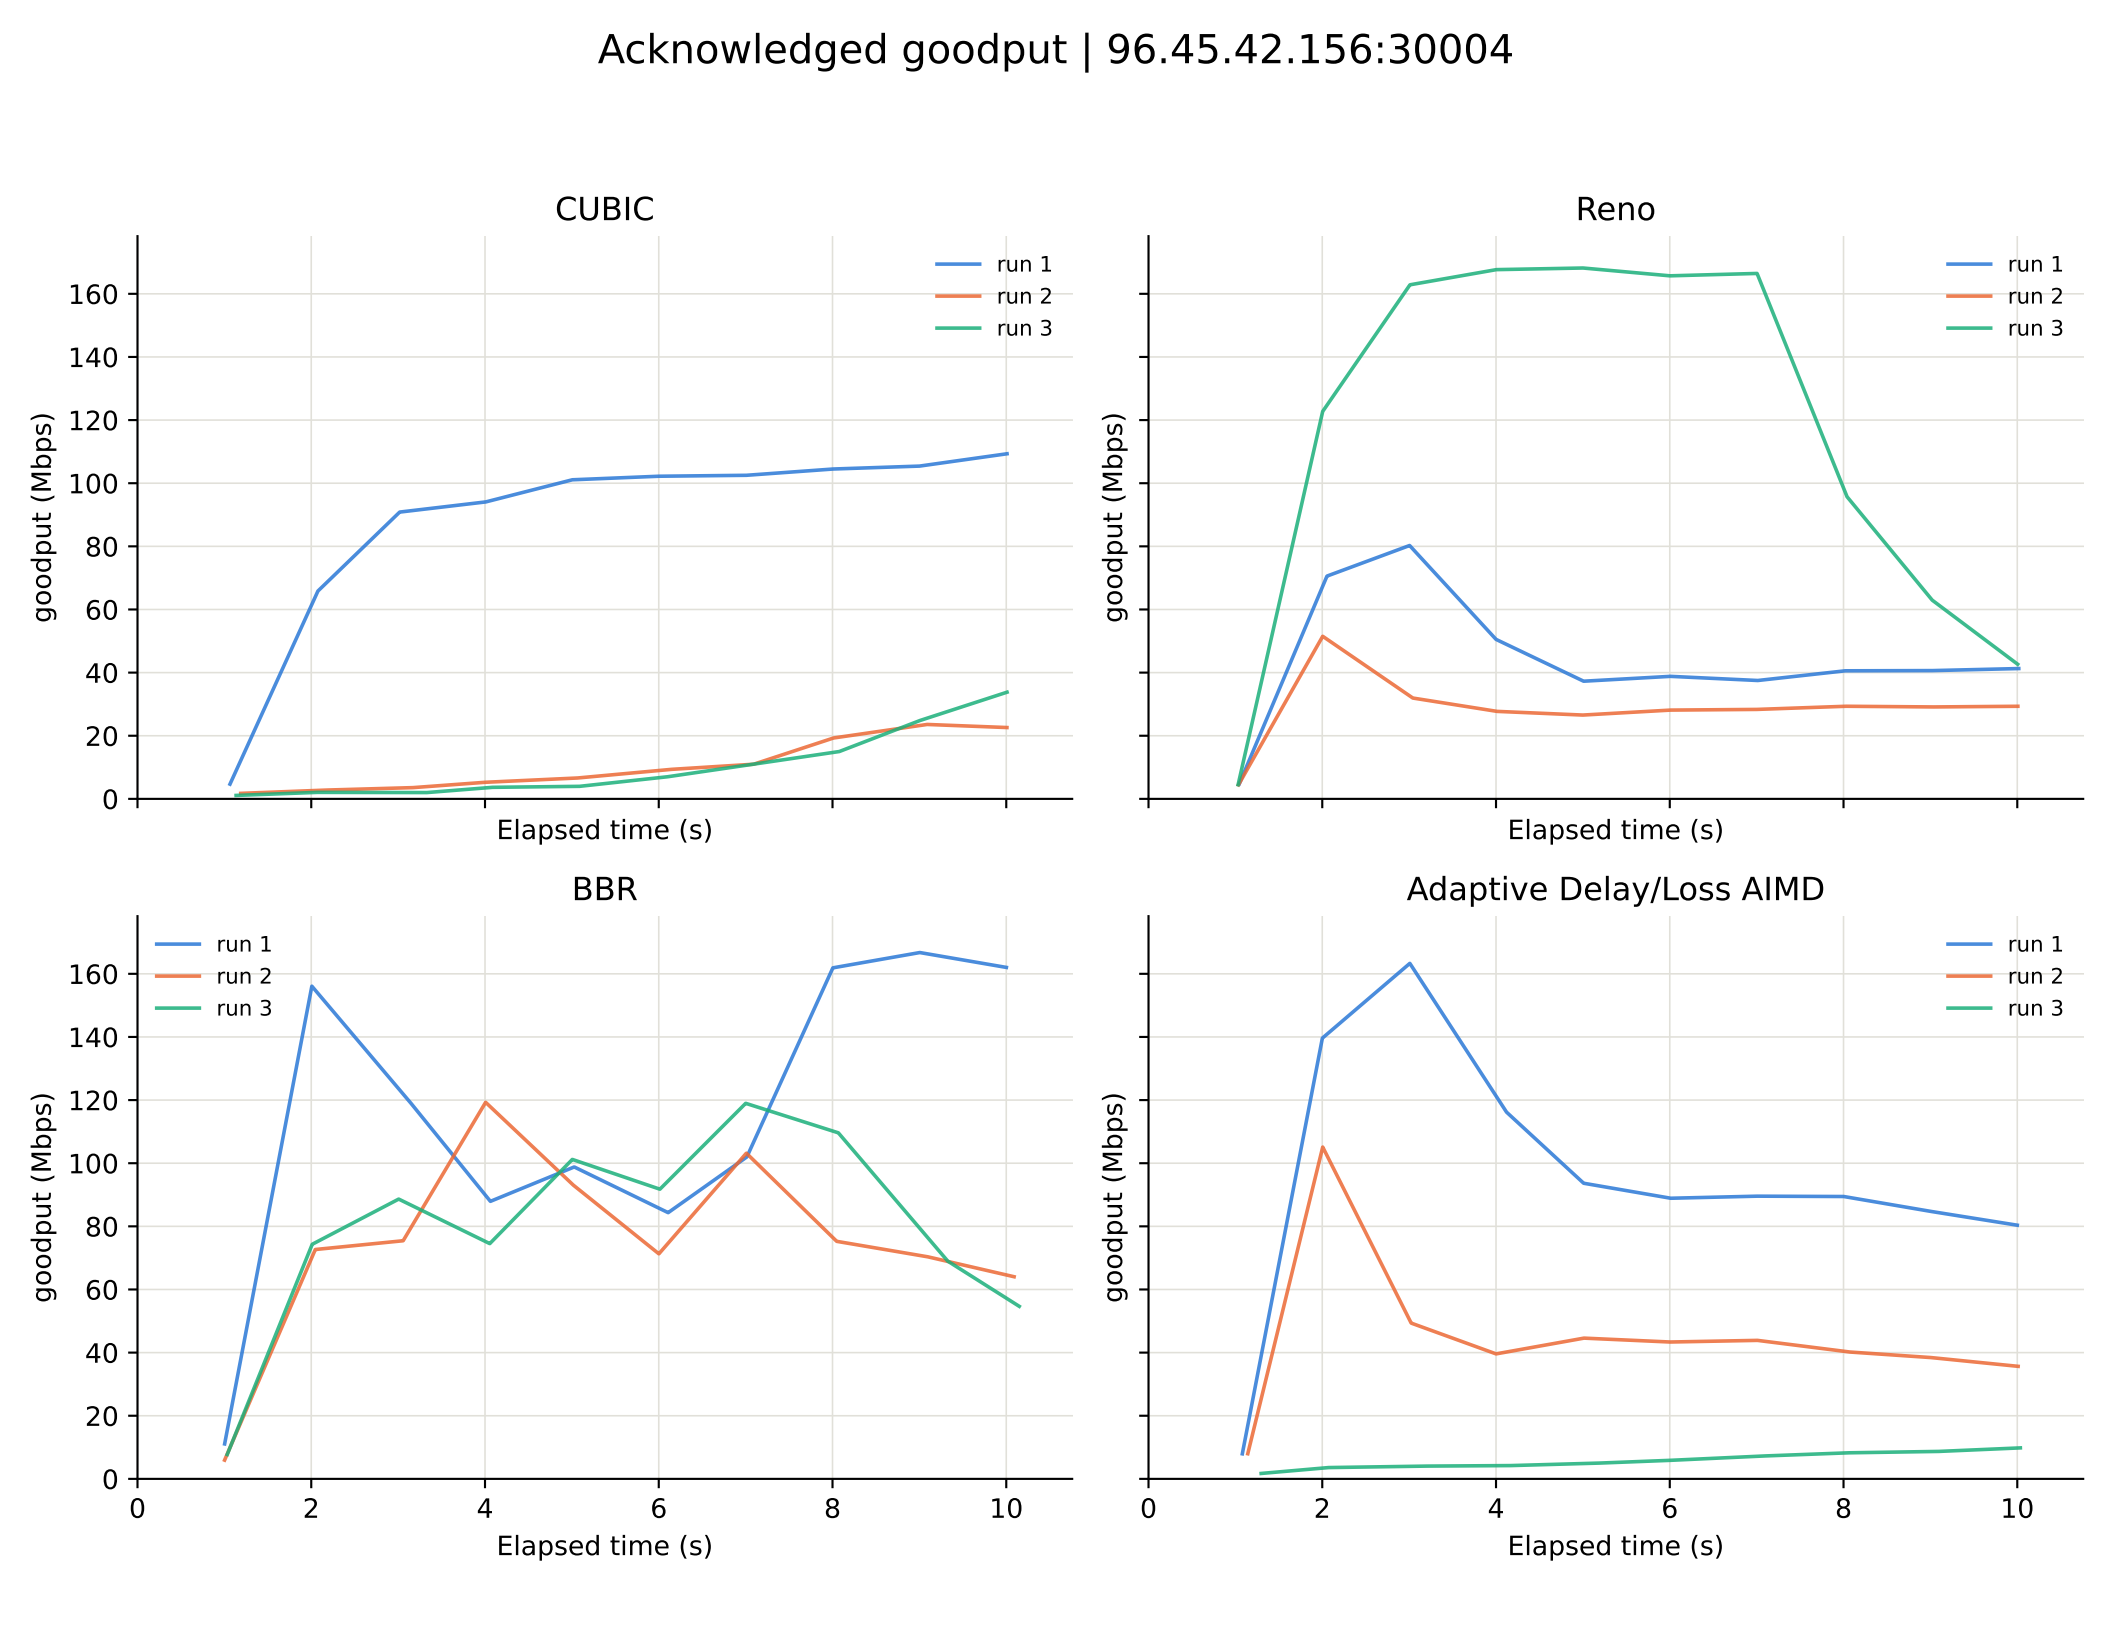

Congestion window | 96.45.42.156:30004
CUBIC
Reno
BBR
Adaptive Delay/Loss AIMD
run 1
run 2
run 3
cwnd (segments)
Elapsed time (s)
0
1000
2000
3000
4000
5000
0
2
4
6
8
10

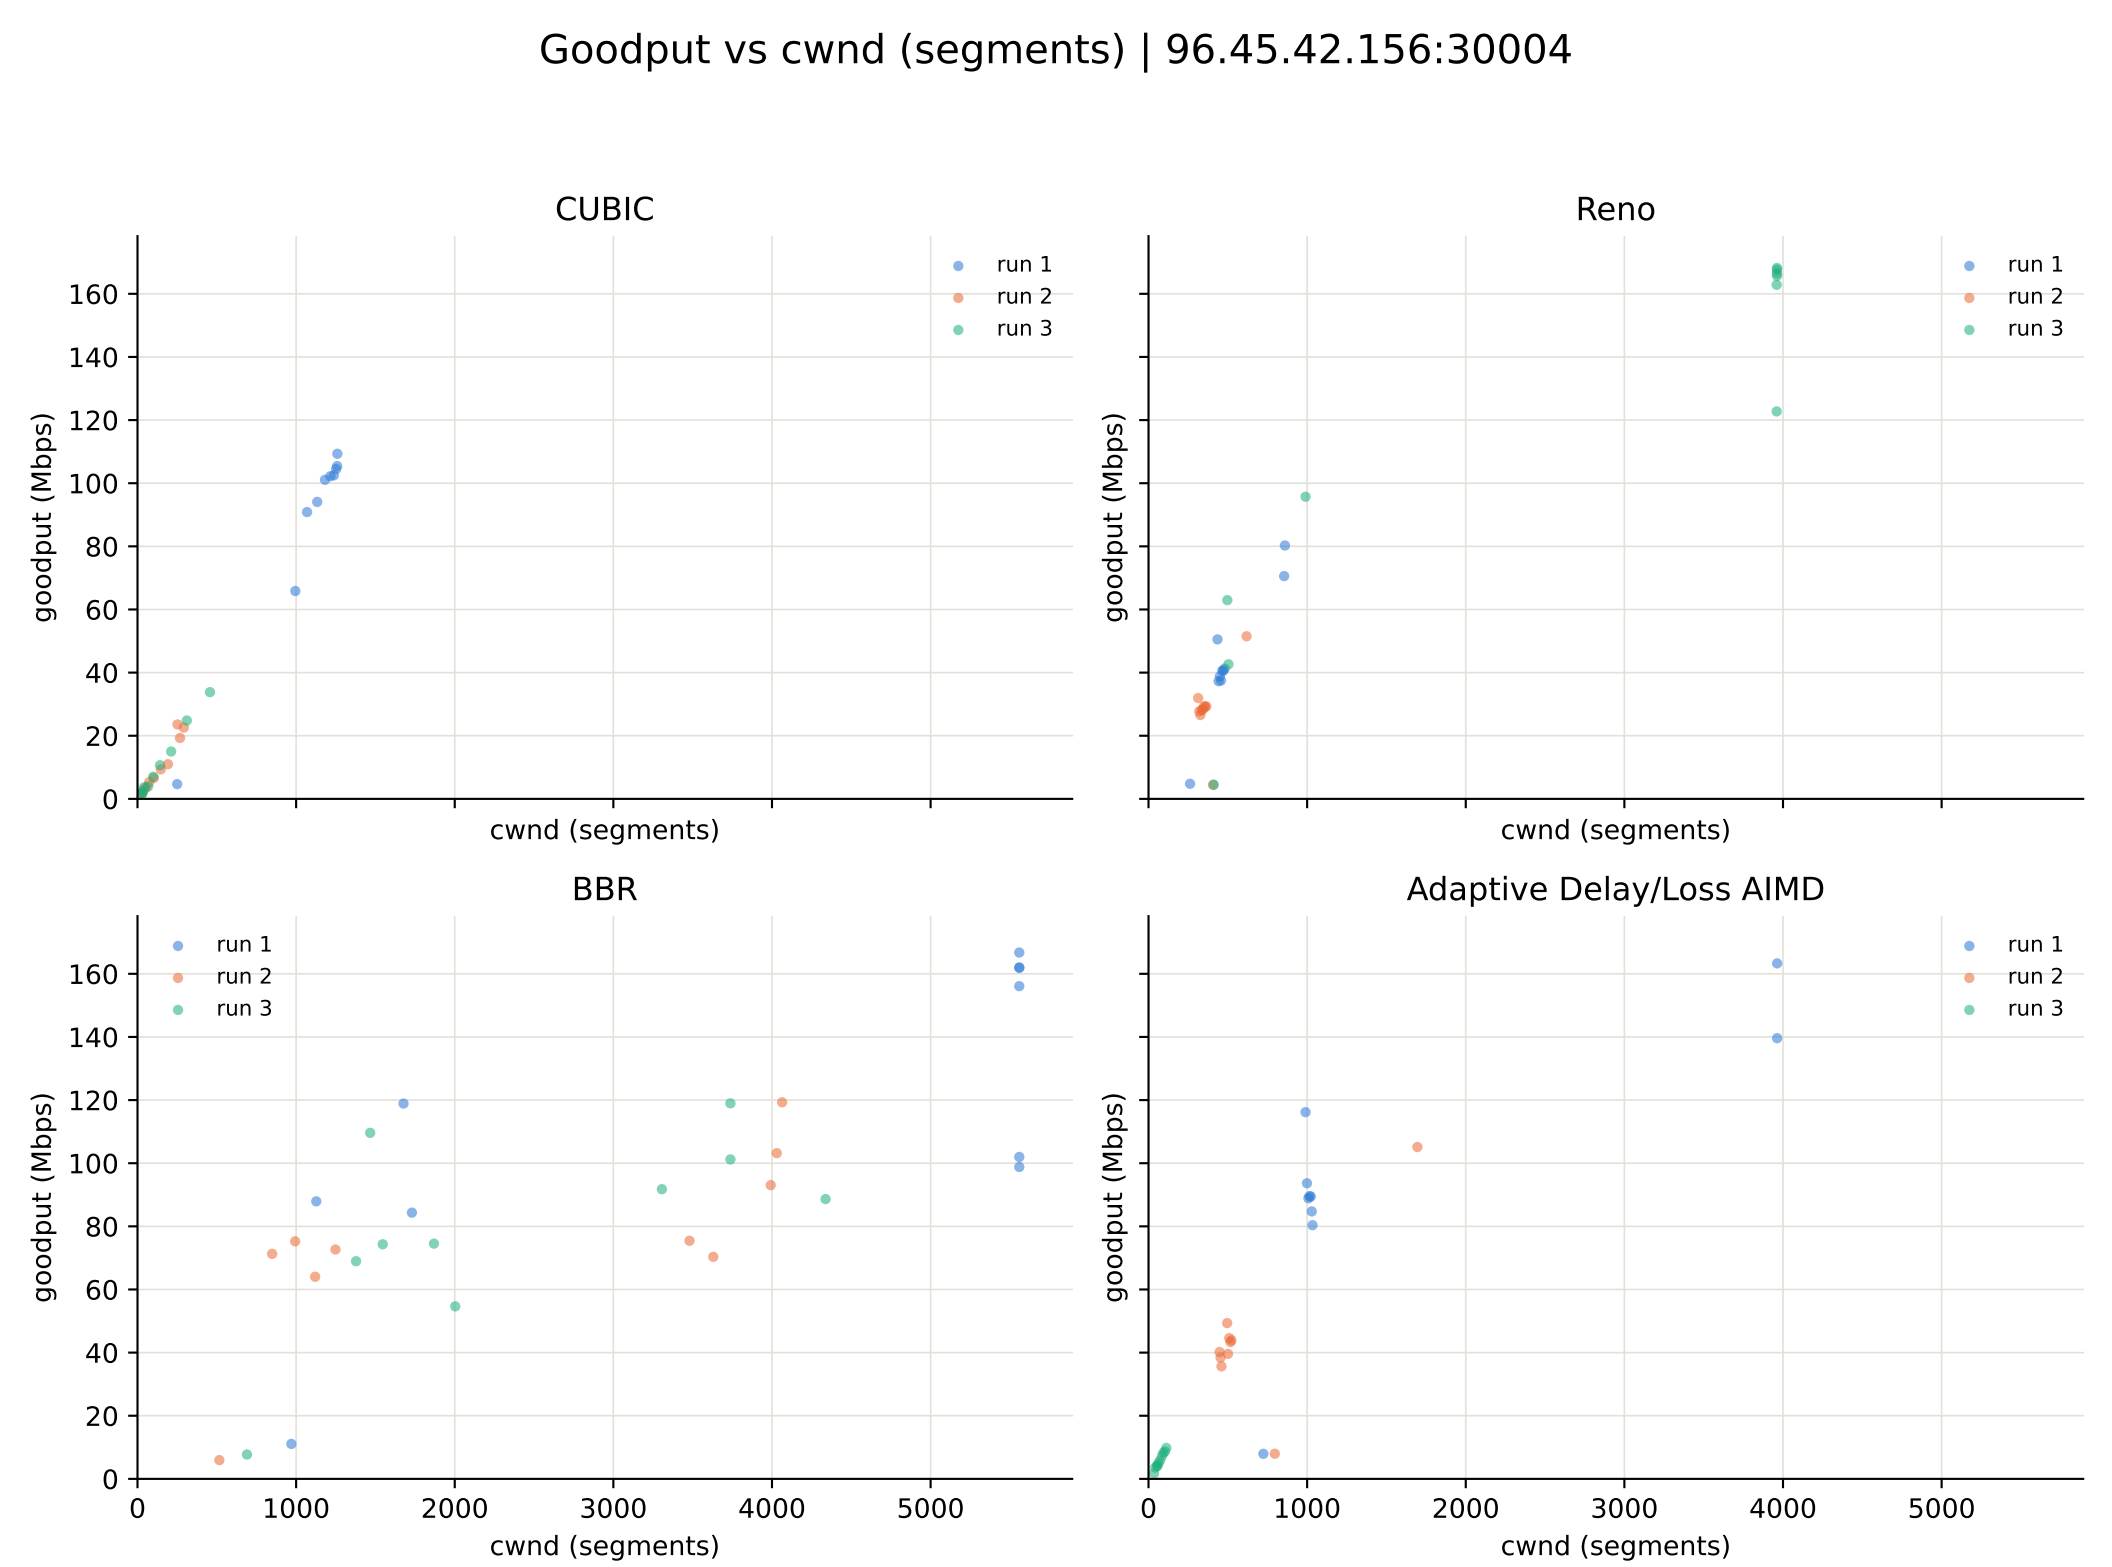

RTT estimate | 96.45.42.156:30004
CUBIC
Reno
BBR
Adaptive Delay/Loss AIMD
run 1
run 2
run 3
RTT (ms)
Elapsed time (s)
120
140
160
180
200
220
240
0
2
4
6
8
10

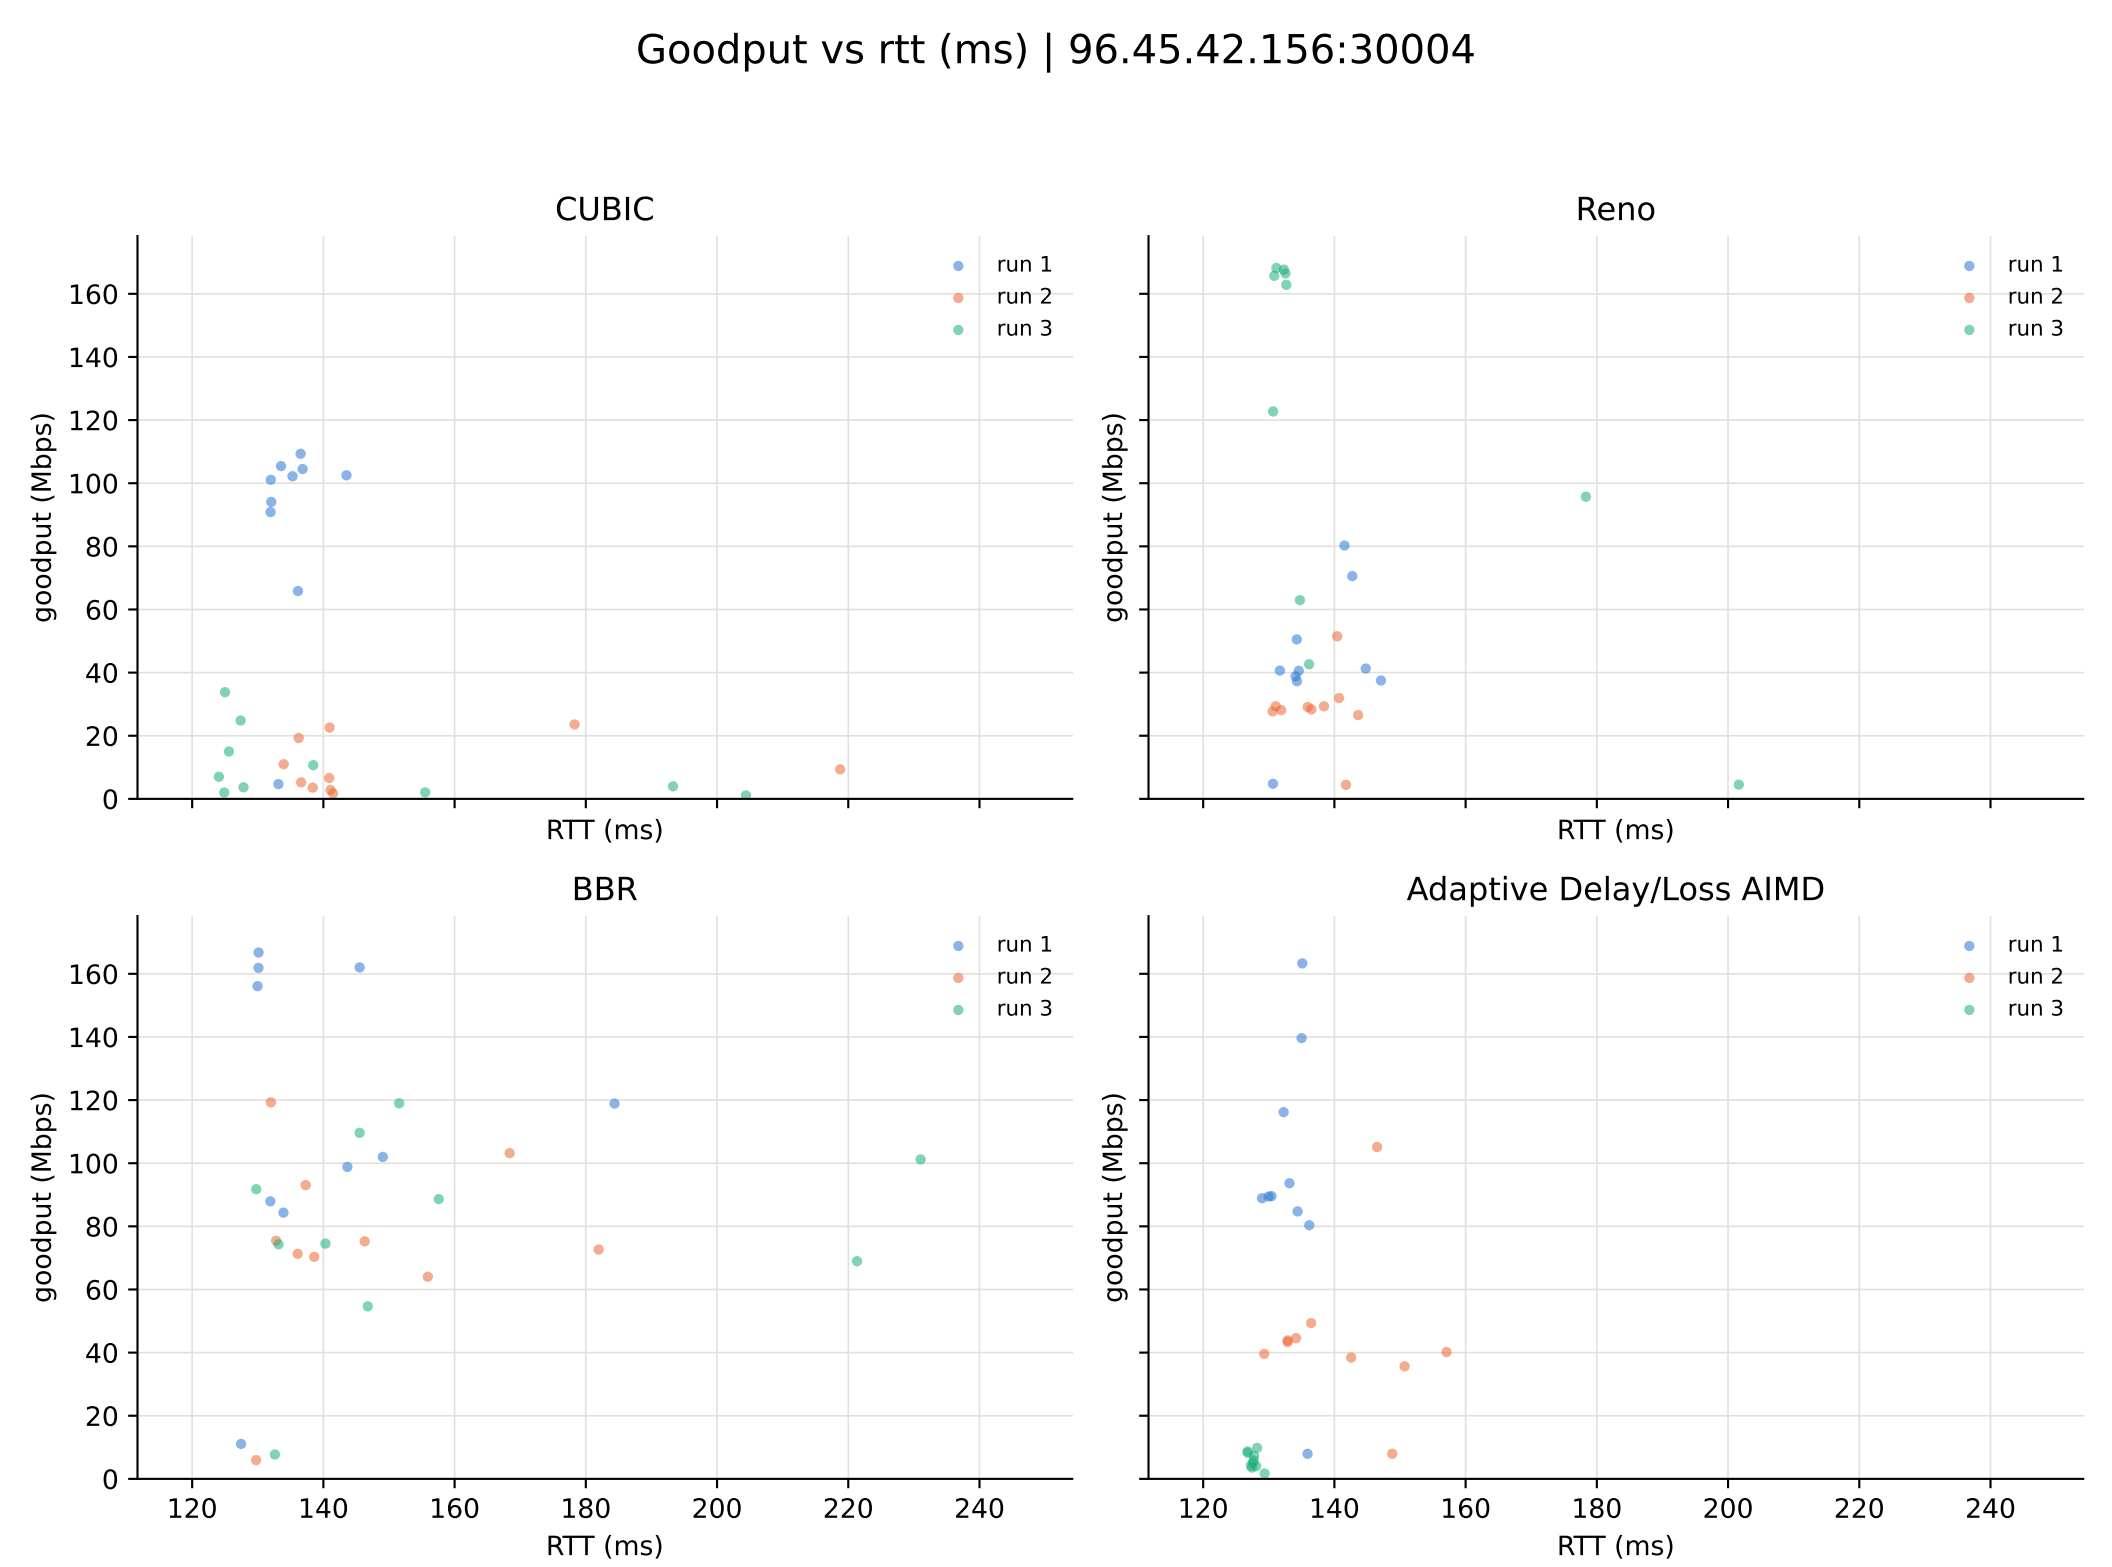
Retransmissions per interval | 96.45.42.156:30004



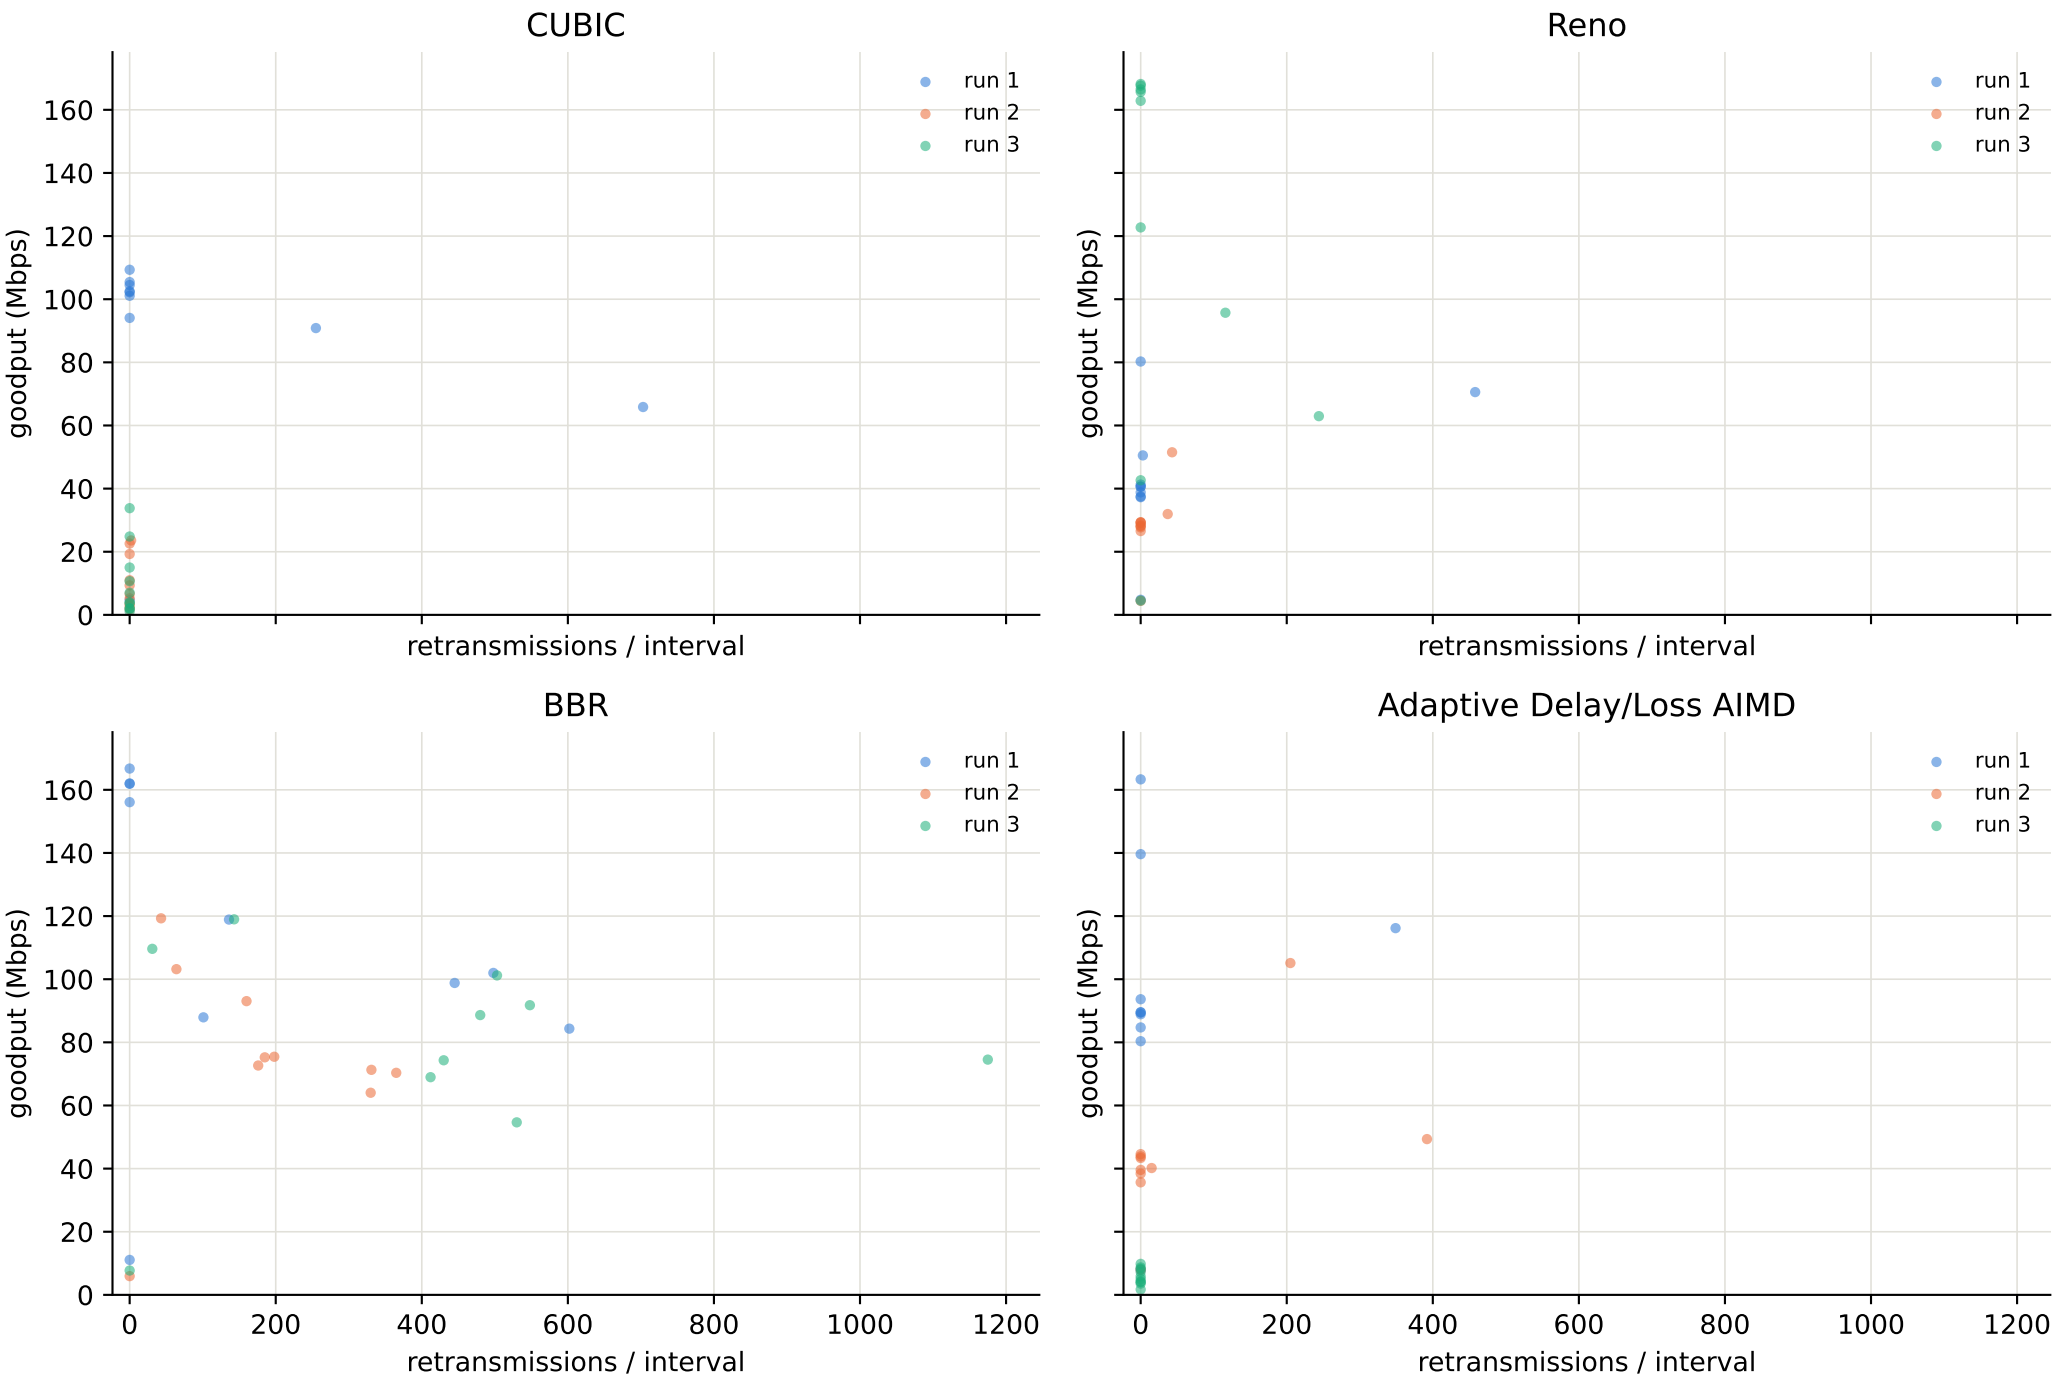
Loss proxy: increase in TCP retransmissions during a sample interval.


Acknowledged goodput | 96.45.42.156:30004
CUBIC
Reno
BBR
Adaptive Delay/Loss AIMD
run 1
run 2
run 3
goodput (Mbps)
Elapsed time (s)
0
20
40
60
80
100
120
140
160
0
2
4
6
8
10


Goodput vs cwnd (segments) | 96.45.42.156:30004
CUBIC
Reno
BBR
Adaptive Delay/Loss AIMD
run 1
run 2
run 3
goodput (Mbps)
cwnd (segments)
0
20
40
60
80
100
120
140
160
0
1000
2000
3000
4000
5000


Goodput vs rtt (ms) | 96.45.42.156:30004
CUBIC
Reno
BBR
Adaptive Delay/Loss AIMD
run 1
run 2
run 3
goodput (Mbps)
RTT (ms)
0
20
40
60
80
100
120
140
160
120
140
160
180
200
220
240

Goodput vs retransmissions / interval | 96.45.42.156:30004



Loss proxy: increase in TCP retransmissions during a sample interval.