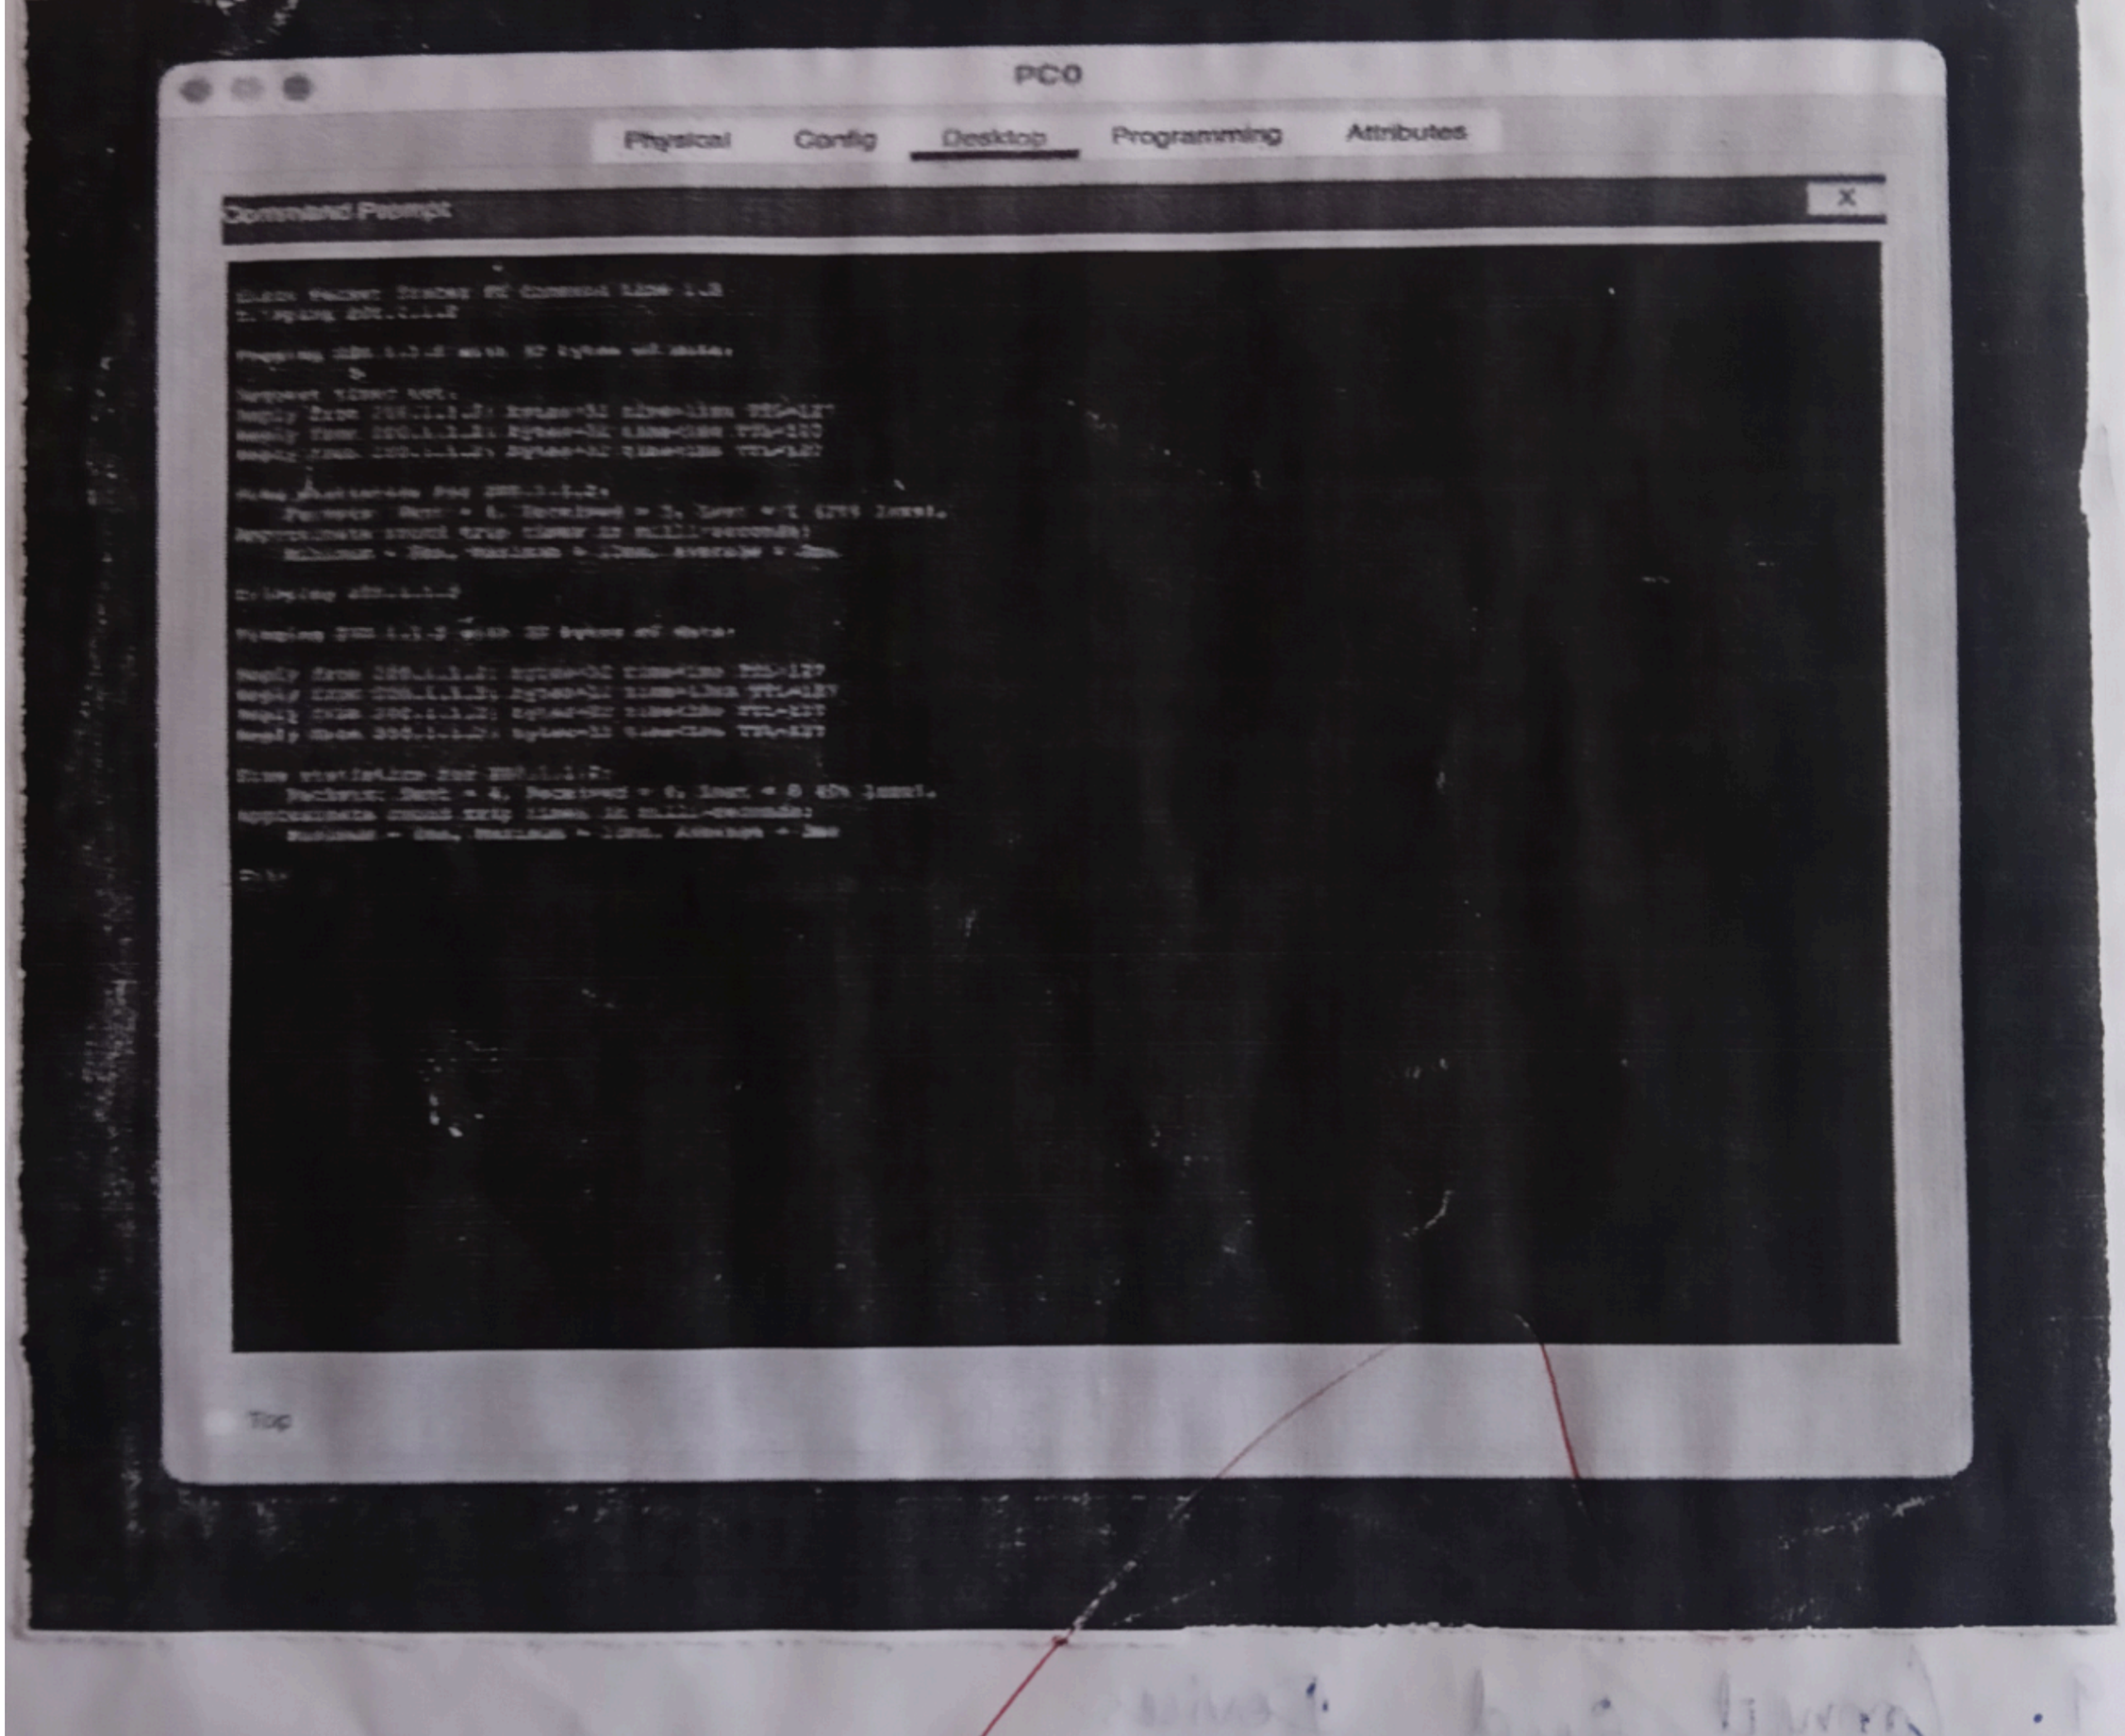
11. Examine Network Address Translation (NAT) using Cisco Packet Tracer

Aim: To configure and examine NAT using CPT and verify communication b/w a private network and a public network.

Procedure:

1. Open Cisco Packet Tracer.
2. Add Network Devices.
3. Connect the Devices
4. Open Router CLI
5. Configure the Inside Interface.
6. Configure the Outside Interface.
7. Configure Static NAT
8. Save the Configuration
9. Assign IP Address → Configure the PC
10. Assign IP Address → Configure the Server.
11. Test Connectivity → Verify NAT.
12. Verify NAT Translation.
13. View NAT Statistics.

Result: Examining the NAT using Cisco Packet Tracer has been executed Successfully.


PC0
Physical
Config
Desktop
Programming
Attributes
Command Prompt
X